



Technical Information

Liquiline Compact CM82

Configurable multi-parameter transmitter for Memosens sensors



Space-saving transmitter for monitoring and controlling processes in industry and the environmental sector

Application

The CM82 transmitter can be used in all sectors and by plant manufacturers in these sectors and supports sensors with the blue Memosens plug-in head:

- pH sensors
- ORP sensors
- pH/ORP combined sensors
- Contacting conductivity sensors
- Oxygen sensors

Direct connection to PLC via:

- 4 to 20 mA
- HART
- Bluetooth® LE interface for commissioning and maintenance

Your benefits

- Space-saving installation and storage:
 - The two-wire device fits into an assembly and does not require a separate power supply.
 - Minimum inventory
- Maximum safety:
 - Tried and trusted Memosens technology
- Easy operation
 - Use your existing tablet and smartphone for operation and commissioning.
 - Standardized operating concept across all devices from the Liquiline platform
- Fast and reliable
 - A reliable Bluetooth® LE connection allows you to check measuring points that are dangerous or difficult to access from a safe distance.
- Suitable for all locations
 - Regardless of whether your measuring point is exposed to dust, steam, rain, snow, heat or cold, the CM82 is always exactly the transmitter you need!


Function and system design

Measuring system

The overview shows examples of measuring systems. Other sensors and assemblies can be ordered for conditions specific to your application (www.endress.com/products).

A complete measuring system comprises the following components:

- Liquiline compact transmitter
- Sensors with Memosens technology
- Assemblies to suit the sensors used

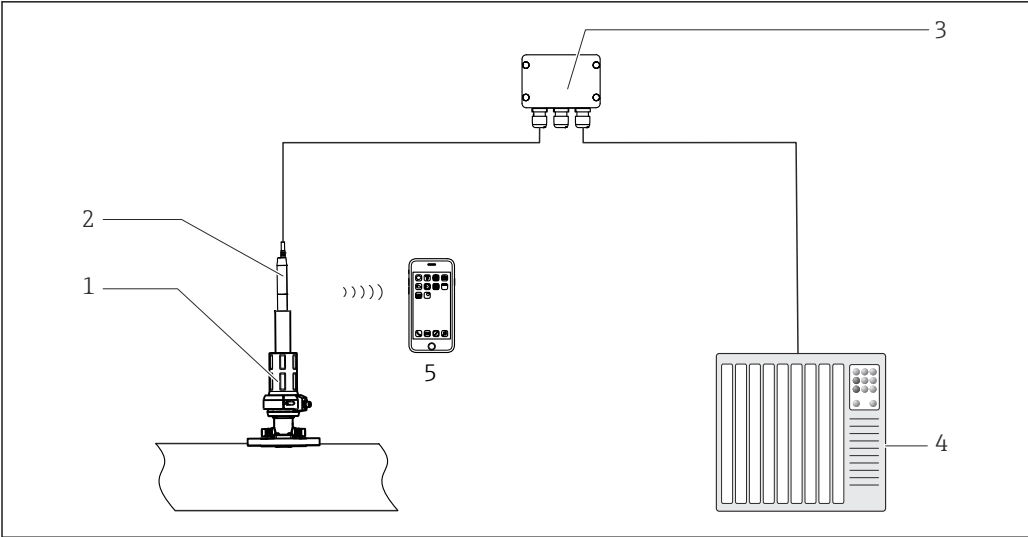

A0036772

- 1 *Measuring point with assembly and Memosens sensor*
2 *Liquiline Compact CM82*
3 *Junction box, optionally available*
4 *PLC (programmable logic controller)*
5 *Bluetooth LE optional for mobile terminals, e.g. tablets*

Sensor connection

Sensors with Memosens protocol

Sensor types	Sensors
Digital sensors with inductive Memosens plug-in head	■ pH sensors ■ ORP sensors ■ pH/ORP combined sensors ■ Oxygen sensors ■ Conductivity sensors

Application example



A0035115

2 Application example in a fermenter, using a tablet for operation

Communication and data processing

Communication protocols:

- 4 to 20 mA
- Fieldbus HART
- Bluetooth® LE wireless technology (optional)



The device drivers available make it possible to perform a basic setup and display measured values and diagnostics information via the fieldbus. Full device configuration is possible via the fieldbus and Bluetooth.

Dependability

Reliability

Memosens

Memosens makes your measuring point safer and more reliable:

- Non-contact, digital signal transmission enables optimum galvanic isolation
- No contact corrosion
- Completely watertight
- Sensor can be calibrated in a lab, thus increasing the availability of the measuring point in the process
- Predictive maintenance thanks to recording of sensor data, e.g.:
 - Total hours of operation
 - Hours of operation with very high or very low measured values
 - Hours of operation at high temperatures
 - Number of steam sterilizations
 - Sensor condition



A0035116

3 Plug & Play with Memosens technology

The status of the transmitter and the connected sensor is indicated by a red/green LED.



A0036843

 4 LED display

USP and EP

- "Water for Injection" (WFI) as per USP <645> and EP
- "Highly Purified Water" (HPW) as per EP
- "Purified Water" (PW) as per EP

The uncompensated conductivity value and the temperature are measured for the USP/EP limit functions. The measured values are compared against the tables defined in the standards. An alarm is triggered if the limit value is exceeded. Furthermore, it is also possible to configure an early warning alarm that signals undesired operating states before they occur.

Security

Safe signal transmission via Bluetooth® LE

 Signal transmission via Bluetooth® wireless technology uses a cryptographic technique tested by the Fraunhofer Institute.

Security levels for Endress and Hauser Bluetooth infrastructure:¹⁾

- Protocol: **High**
- Algorithms: **High**

Measured against:

- the security objectives, e.g. confidentiality, integrity, availability, etc.
- the risk analysis, e.g. key distribution, authentication, password recovery, etc.
- the attack model, e.g. motivation for attack, time required, expertise in electronics, etc.
- the weak-point analysis

For comparison: The general Bluetooth standard is classified as "Low".

Protection against unauthorized access:

- Password-protected
 - Without the SmartBlue app, the device is not visible via Bluetooth® wireless technology.
 - Only one point-to-point connection is established between a sensor and a smartphone or tablet.
 - The Bluetooth® wireless technology interface can be disabled via SmartBlue.
 - Bluetooth® is optional. The device can be ordered with this functionality enabled.
- If ordered with Bluetooth® disabled, Bluetooth® can be enabled at a later stage by means of an activation code (accessory kit) linked to the serial number.
- A disabled Bluetooth® interface can be re-enabled only via HART.

Measured value compensation

pH:

Temperature

Oxygen:

- Temperature
- Air pressure

1) Multi-level scale for security assessments in accordance with Fraunhofer AISEC cryptographic technique: "Very low", "Low", "High", "Very high"

Conductivity:

Temperature

Various methods are available to compensate for the temperature dependency:

- Linear
- NaCl (IEC 746-3)
- Water ISO7888 (20°C)
- Water ISO7888 (25°C)
- Ultrapure water (NaCl)
- Ultrapure water (HCl)

IT security

Our warranty is valid only if the product is installed and used as described in the Operating Instructions. The product is equipped with security mechanisms to protect it against any inadvertent changes to the settings.

IT security measures, which provide additional protection for the product and associated data transfer, must be implemented by the operators themselves in line with their security standards.

Input


Measured variable	The transmitter is designed for digital Memosens sensors with an inductive plug-in head: ■ pH ■ ORP ■ pH/ORP combined sensors ■ Conductive conductivity ■ Dissolved oxygen
Measuring range	→ Documentation of the connected sensor
Type of input	Digital sensor inputs for Memosens-sensors

Output

Output signal	4 ... 20 mA/HART, galvanically isolated from the sensor circuits
Linearization	Linear
Transmission behavior	Linear

Power supply

Supply voltage	12.6 to 30 VDC (when failure current setting > 20 mA) 14 to 30 VDC (when failure current setting < 4 mA)
-----------------------	---

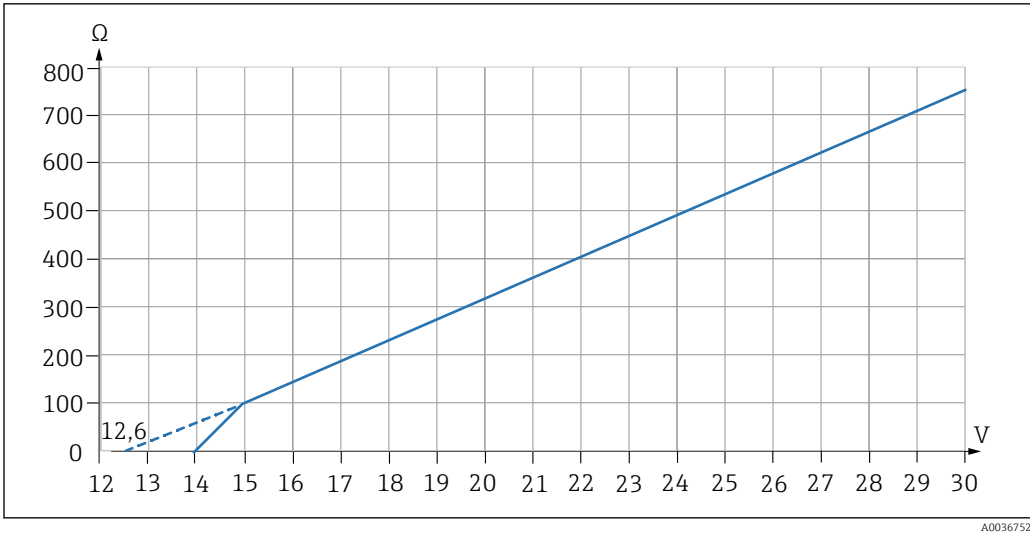

5 Supply voltage and load

The lower voltage value in each case applies only to a load resistance of 0 Ohm.

NOTICE

The device does not have a power switch


- At the supply point, the power supply must be isolated from dangerous live cables by double or reinforced insulation in the case of devices with a 24 V power supply.

Cable specification	Cable length: - Max. 3 m (10 ft) - Max. 7 m (23 ft) - Max. 15 m (49 ft)
Overvoltage protection	IEC 61 000-4-4 and IEC 61 000-4-5 with +/- 1 kV

Performance characteristics


Resolution	Current output < 5 µA
Repeatability	→ Documentation of the connected sensor
Response time	Current output t ₉₀ = max. 500 ms for an increase from 0 to 20 mA
Tolerance	Current output Typical measuring tolerances: < ±20 µA (if current value = 4 mA) < ±50 µA (for current values 4 to 20 mA) at 25 °C (77 °F) each additional tolerance depending on the temperature: < 1.5 µA/K

Environment

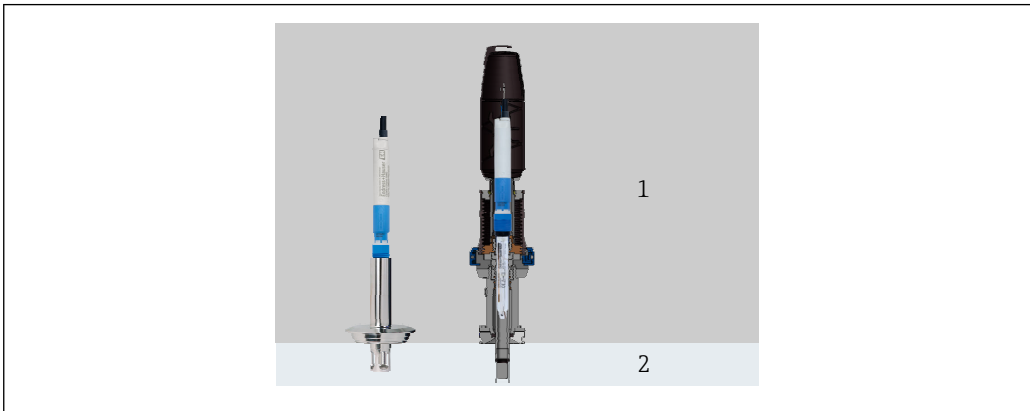Ambient temperature range	-20 to 85 °C (-4 to 185 °F)	
	The maximum ambient temperature depends on the process temperature and the transmitter's installation position.	
	► Make sure that the ambient temperature at the transmitter does not exceed 85 °C (185 °F).	
	Example for ambient conditions in Endress+Hauser assemblies:	
	■ for open installation (without protective cover, i.e. free convection at the transmitter), e.g. CPA442, CPA842 ■ for enclosed installation (with protective cover), e.g. CPA871, CPA875, CPA842	
	T _{ambient} = max. 60 °C (140 °F)	
	T _{process} = max. 100 °C (212 °F), in continuous operation	
	T _{process} = max. 140 °C (284 °F), < 2h (for sterilization)	
	  6 Installation position of transmitter with or without protective cover 1 Ambient temperature T_{ambient} 2 Process temperature T_{process} A0046638	
Storage temperature	-40 to +85 °C (-40 to 185 °F)	
Relative humidity	5 to 95 %	
Degree of protection	IP 67 IP 68 NEMA Type 6	
Electromagnetic compatibility (EMC)	■ EN 61326-1 ■ EN 61326-2-3 ■ EN 301489-1 ■ EN 301489-17 ■ NAMUR NE 21	
Electrical safety	EN 61010-1	
Operating height	< 2000 m (< 6562 ft) above MSL	
Pollution degree	Complete device:	Pollution level 4
	Internal:	Pollution level 2

Mechanical construction

Dimensions

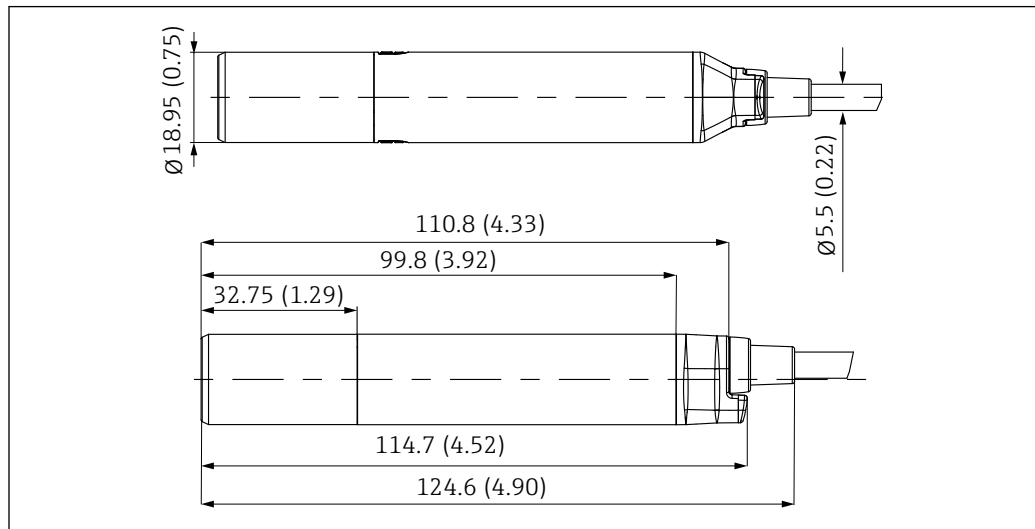

A0033272

7 Dimensions in mm (inch)

Materials

Components	Material
Housing, cover	Peek 151
Strain relief	EPDM (peroxide crosslinked)
Axial ring	Peek 450 G
Optical waveguide	PC transparent

Impact loads

The product is designed for mechanical impact loads of 1 J (IK06) as per the requirements of EN 61010-1.

Weight

without cable	Approx. 42 g (1.5 oz)
3 m (9 f) cable	Approx. 190 g (7 oz)
7 m (23 f) cable	Approx. 380 g (13 oz)
15 m (49 f) cable	Approx. 760 g (27 oz)
For every 1 m (3 f) of cable	Approx. 48 g (2 oz)

Operability


Operating concept

- Bluetooth® LE wireless technology
- HART

Operation via SmartBlue (app)

SmartBlue is available as a download for Android terminals from the Google Play Store and for iOS devices in the App Store.

If you scan the QR code, you will be brought directly to the app:

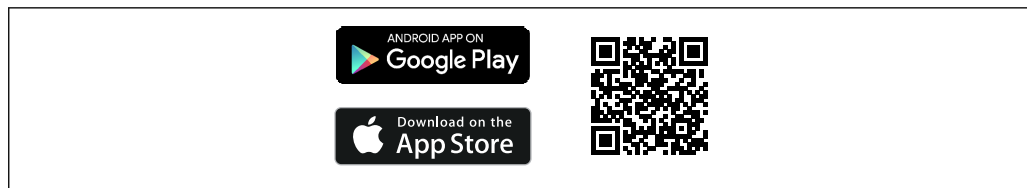


A0033202

8 Download links



A0029747

9 SmartBlue app

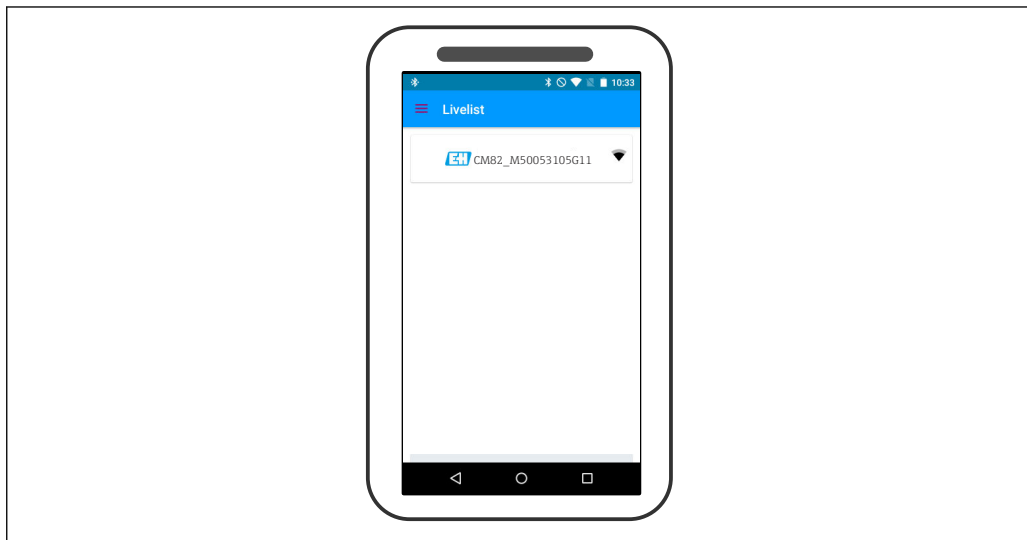

A0035117

10 Livelist


The Livelist displays all of the devices that are within range.

System requirements

- iOS devices: iPhone 4S or higher from iOS9.0; iPad2 or higher from iOS9.0; iPod Touch 5th generation or higher from iOS9.0
- Android devices: from Android 4.4 KitKat and Bluetooth® 4.0

Remote operation

HART

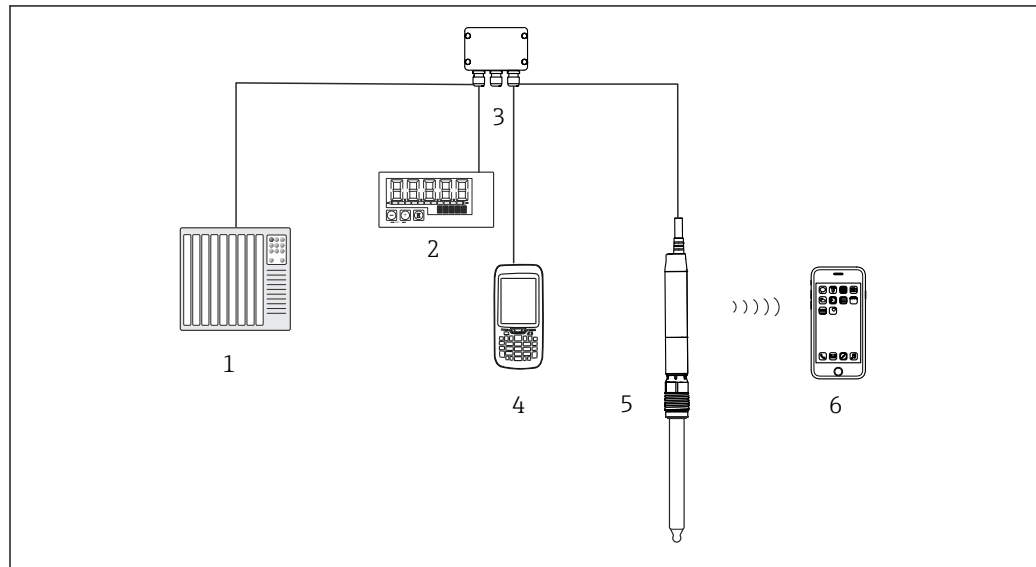

A0036740

11 Wiring options for remote operation via HART protocol

- 1 PLC (programmable logic control)
- 2 RIA15 loop-powered process indicator, optional
- 3 Junction box
- 4 HART operating device (e.g. Fieldcare), optional
- 5 Transmitter with optional Bluetooth® LE wireless technology
- 6 Optional: Smartphone / tablet with SmartBlue (app)

Certificates and approvals

Current certificates and approvals that are available for the product can be selected via the Product Configurator at www.endress.com:

1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Configuration**.

Radio standards

- EN 300 328 (Europe)
- 47 CFR 15.247 (United States)
- RSS-247 Issue 1 (Canada)
- RSS-GEN Issue 4 (Canada)
- 202-LSF040 (Japan)
- CMIIT ID: 2017DJ6495 (China)
- R-CRM-E1H-CM82A (South Korea)
- Anatel 00182-18-11036 (Brazil)
- IFETEL: RCPENCM18-0926-A1 (Mexico)
- SDoC procedure (Thailand)
- IMDA Standards DA108204 (Singapore)
- CNC ID: C-23309 (Argentina)

Ordering information

Product page

www.endress.com/CM82

Product Configurator

1. **Configure**: Click this button on the product page.

2. Select **Extended selection**.
 - ↳ The Configurator opens in a separate window.
 3. Configure the device according to your requirements by selecting the desired option for each feature.
 - ↳ In this way, you receive a valid and complete order code for the device.
 4. **Apply:** Add the configured product to the shopping cart.
-  For many products, you also have the option of downloading CAD or 2D drawings of the selected product version.
5. **Show details:** Open this tab for the product in the shopping cart.
 - ↳ The link to the CAD drawing is displayed. If selected, the 3D display format is displayed along with the option to download various formats.

Scope of delivery

The scope of delivery includes:

- CM82
- Brief Operating Instructions

Accessories

Device-specific accessories

Sensors

pH glass electrodes

Memosens CPS11E

- pH sensor for standard applications in process and environmental engineering
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cps11e



Technical Information TI01493C

Memosens CPS31E

- pH sensor for standard applications in drinking water and swimming pool water
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cps31e



Technical Information TI01574C

Memosens CPS41E

- pH sensor for process technology
- With ceramic junction and KCl liquid electrolyte
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cps41e



Technical Information TI01495C

Memosens CPS71E

- pH sensor for chemical process applications
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cps71e



Technical Information TI01496C

Memosens CPS171D

- pH electrode for bio-fermenters with digital Memosens technology
- Product Configurator on the product page: www.endress.com/cps171d



Technical Information TI01254C

Memosens CPS91E

- pH sensor for heavily polluted media
- With open aperture
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cps91e



Technical Information TI01497C

Memosens CPF81E

- pH sensor for mining operations, industrial water and wastewater treatment
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cpf81e



Technical Information TI01594C

*Enamel pH electrodes***Ceramax CPS341D**

- pH electrode with pH-sensitive enamel
- Meets highest demands of measuring accuracy, pressure, temperature, sterility and durability
- Product Configurator on the product page: www.endress.com/cps341d



Technical Information TI00468C

*ORP sensors***Memosens CPS12E**

- ORP sensor for standard applications in process and environmental engineering
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cps12e



Technical Information TI01494C

Memosens CPS42E

- ORP sensor for process technology
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cps42e



Technical Information TI01575C

Ceragel CPS72D

- ORP electrode with reference system including ion trap
- Product Configurator on the product page: www.endress.com/cps72d



Technical Information TI00374C

Memosens CPF82E

- ORP sensor for mining operations, industrial water and wastewater treatment
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cpf82e



Technical Information TI01595C

Orbipore CPS92D

- ORP electrode with open aperture for media with high dirt load
- Product Configurator on the product page: www.endress.com/cps92d



Technical Information TI00435C

*pH-ISFET sensors***Tophit CPS441D**

- Sterilizable ISFET sensor for low-conductivity media
- Liquid KCl electrolyte
- Product Configurator on the product page: www.endress.com/cps441d



Technical Information TI00352C

Tophit CPS471D

- Sterilizable and autoclavable ISFET sensor for food and pharmaceuticals, process engineering
- Water treatment and biotechnology
- Product Configurator on the product page: www.endress.com/cps471d



Technical Information TI00283C

Tophit CPS491D

- ISFET sensor with open aperture for media with high dirt load
- Product Configurator on the product page: www.endress.com/cps491d



Technical Information TI00377C

pH/ORP combined sensors

Memosens CPS16E

- pH/ORP sensor for standard applications in process technology and environmental engineering
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cps16e



Technical Information TI01600C

Memosens CPS76E

- pH/ORP sensor for process technology
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cps76e



Technical Information TI01601C

Memosens CPS96E

- pH/ORP sensor for heavily polluted media and suspended solids
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cps96e



Technical Information TI01602C

Conductivity sensors with conductive measurement of conductivity

Memosens CLS15E

- Digital conductivity sensor for measurements in pure and ultrapure water
- Conductive measurement
- With Memosens 2.0
- Product Configurator on the product page: www.endress.com/cls15e



Technical Information TI01526C

Memosens CLS16E

- Digital conductivity sensor for measurements in pure and ultrapure water
- Conductive measurement
- With Memosens 2.0
- Product Configurator on the product page: www.endress.com/cls16e



Technical Information TI01527C

Memosens CLS21E

- Digital conductivity sensor for media with medium or high conductivity
- Conductive measurement
- With Memosens 2.0
- Product Configurator on the product page: www.endress.com/cls21e



Technical Information TI01528C

Memosens CLS82E

- Hygienic conductivity sensor
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cls82e



Technical Information TI01529C

*Oxygen sensors***Memosens COS22E**

- Hygienic amperometric oxygen sensor with maximum measurement stability over multiple sterilization cycles
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cos22e



Technical Information TI01619C

Memosens COS51E

- Amperometric oxygen sensor for water, wastewater and utilities
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cos51e



Technical Information TI01620C

Memosens COS81E

- Hygienic optical oxygen sensor with maximum measurement stability over multiple sterilization cycles
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cos81e



Technical Information TI01558C

Software**Memobase Plus CYZ71D**

- PC software to support laboratory calibration
- Visualization and documentation of sensor management
- Sensor calibrations stored in database
- Product Configurator on the product page: www.endress.com/cyz71d



Technical Information TI00502C

DeviceCare SFE100

Configuration tool for HART, PROFIBUS and FOUNDATION Fieldbus field devices

DeviceCare is available for download at www.software-products.endress.com. You need to register in the Endress+Hauser software portal to download the application.

Technical Information TI01134S

Other accessories*Activation codes*

You must quote the serial number of the device when ordering the activation code.

Activation code: Bluetooth

Order No. 71401176

*Cable junction with Velcro strip***Cable junction with Velcro strip**

- 4 pieces, for sensor cable
- Order No. 71092051

Communication-specific accessories**Commubox FXA195**

Intrinsically safe HART communication with FieldCare via the USB port



Technical Information TI00404F

Wireless HART adapter SWA70

- Wireless device connection
- Easily integrated, offers data protection and transmission safety, can be operated in parallel with other wireless networks, minimum cabling complexity



Technical Information TI00061S

System components

RIA15

- Process display unit, Digital display unit for integration into 4-20 mA circuits
- Panel mounting
- With optional HART communication



Technical Information TI01043K



info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289