



Technical Information

Solimotion FTR20

Flow indicator for bulk solids



Compact device for non-contact flow detection for bulk solids

Application

- Flow indicator for monitoring pneumatic and mechanical transport processes of bulk solids
- Process temperature range: -40 to +450 °C (-40 to +842 °F) with optional high temperature adapter
- Process pressure range: 0.5 to 21 bar (7 to 305 psi) absolute with optional high pressure adapter
- Non-contact detection: use in containers, pipelines, shafts or free-fall shafts (detection from the outside is possible for non-metallic container materials)

Your benefits

- Compact devices with integrated power unit
- Easy mounting using G1½, R1½ or 1½ NPT thread or a suitable mounting adapter
- Different functions for optimal adaptation to the application
- Cost-effective monitoring of a mass flow (present or not present)
- Can also be used in difficult applications where other measurement methods fail
- Electronics housing can be rotated by 360°, allowing orientation into optimum position after installation
- Signaling of mass flow
- Compliant with ATEX, CSA, EAC, IECEx and UKCA

Table of contents

About this document	3	Process	20
Symbols	3	Process temperature	20
Function and system design	4	Process pressure	20
Measuring principle	4	Vibrations	20
Measuring system	5	Mechanical construction	21
Input	6	Dimensions	21
Measured variable	6	Weight	22
Measuring range (Detection range)	6	Materials	22
Operating frequency	6	Process connection	22
Transmitting power	6	Operability	22
Switching frequency	6	Operation concept	22
Antenna opening angle (3 dB)	6	On-site operation	23
Detectable speed	6	Certificates and approvals	24
Output	6	CE mark	24
Output signal	6	Ex approval	24
Switching output	6	RoHS	24
Current output	7	Telecommunications	24
Terminal and connector assignment	7	Food suitability	24
Ex connection data	7	Ordering information	24
Power supply	8	TAG	25
Terminal and connector assignment	8	Scope of delivery	25
Available connectors	8	Accessories	25
Supply voltage	8	Mating connectors	25
Power consumption	8	Pre-fabricated connection cables	25
Potential equalization	8	Mounting bracket	26
Ex connection data	9	Weld-in adapter	26
Terminals	9	Screw-in adapter	27
Cable entries	9	Weld-in adapter with mounting arm	27
Cable specification	9	Mounting flange	28
Overvoltage protection	9	High pressure adapter	29
Performance characteristics	9	Plug	30
Reference conditions	9	Sight glass fitting	30
Influence ambient temperature	9	Insertion adapter	32
Influences on bulk flow detection	9	Weld-in nozzle	32
Vibration influence	10	Spacer tube (wave guide)	33
Mounting	10	Wave guide	33
Mounting location	10	High temperature adapter with extension	34
Mounting position	10	Weather protection cover	35
Installation instructions	11	Supplementary documentation	35
Mounting in contact with the process	11	Standard documentation	35
Mounting samples	12		
Mounting not in contact with the process	12		
Environment	19		
Ambient temperature	19		
Storage temperature	19		
Humidity	19		
Operating height	20		
Degree of protection	20		
Vibration resistance and shock resistance	20		
Pollution degree	20		
Electromagnetic compatibility	20		

About this document

Symbols

Safety symbols



This symbol alerts you to a dangerous situation. Failure to avoid this situation will result in serious or fatal injury.



This symbol alerts you to a dangerous situation. Failure to avoid this situation can result in serious or fatal injury.



This symbol alerts you to a dangerous situation. Failure to avoid this situation can result in minor or medium injury.



This symbol contains information on procedures and other facts which do not result in personal injury.

Electrical symbols



A terminal which must be connected to ground prior to establishing any other connections.

Symbols for certain types of information



Procedures, processes or actions that are permitted.



Procedures, processes or actions that are forbidden.



Indicates additional information



Reference to documentation



Reference to another section



Reference to graphic



Series of steps

Symbols in graphics

A, B, C ... View

1, 2, 3 ... Item numbers

Device-specific symbols



Configuration mode
Indicates the function number or value



Indicates the key for increasing a function value



Indicates the key for reducing a function value



Minimum bulk flow
Indicates a minimum or absent bulk flow




Maximum bulk flow
Indicates a maximum bulk flow

Function and system design

Measuring principle

The FTR20 flow indicator operates on a microwave basis. The device emits a signal which is reflected by the moving bulk material. The FTR20 measures the strength of the reflected frequency-shifted (Doppler effect) energy, this is evaluated and output via the display or the signal output. The range of the FTR20 depends on the reflection characteristics of the bulk solids.

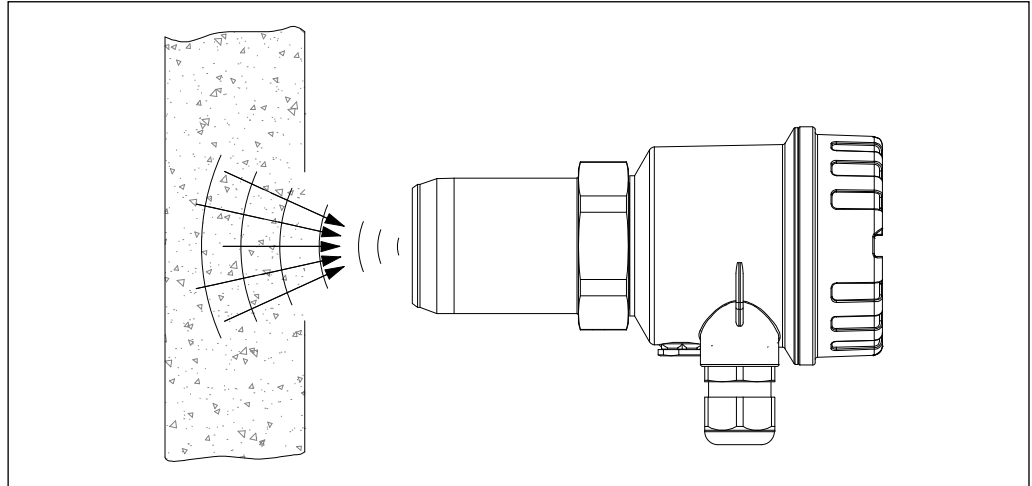


0000000345

1 Measuring principle

Example of volumetric dosing

The FTR20 monitors the discharge of a screw conveyor. If the movement of material slows down (for example due to clogging of the pipe leading downwards or if there is no material being conveyed due to a failure in the screw conveyor), the device generates a message to this effect. This can then be processed further in the downstream system.

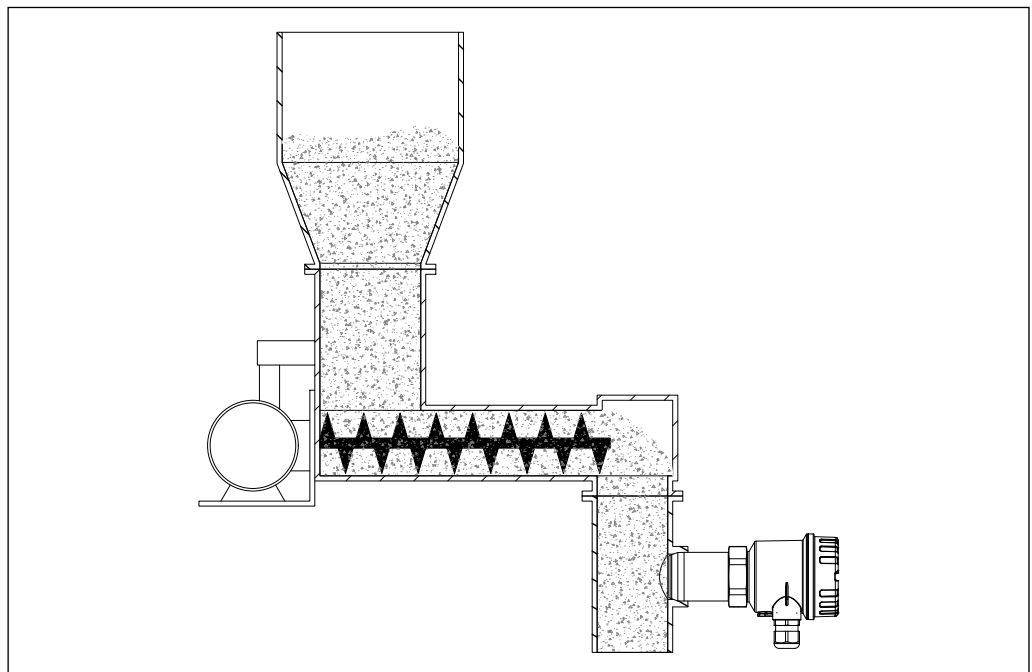


0000000348

2 Example of volumetric dosing

Example of a conveyor belt


The FTR20 monitors the continuous mass movement at a transition point, a break in the flow is detected and put out at the signal output.

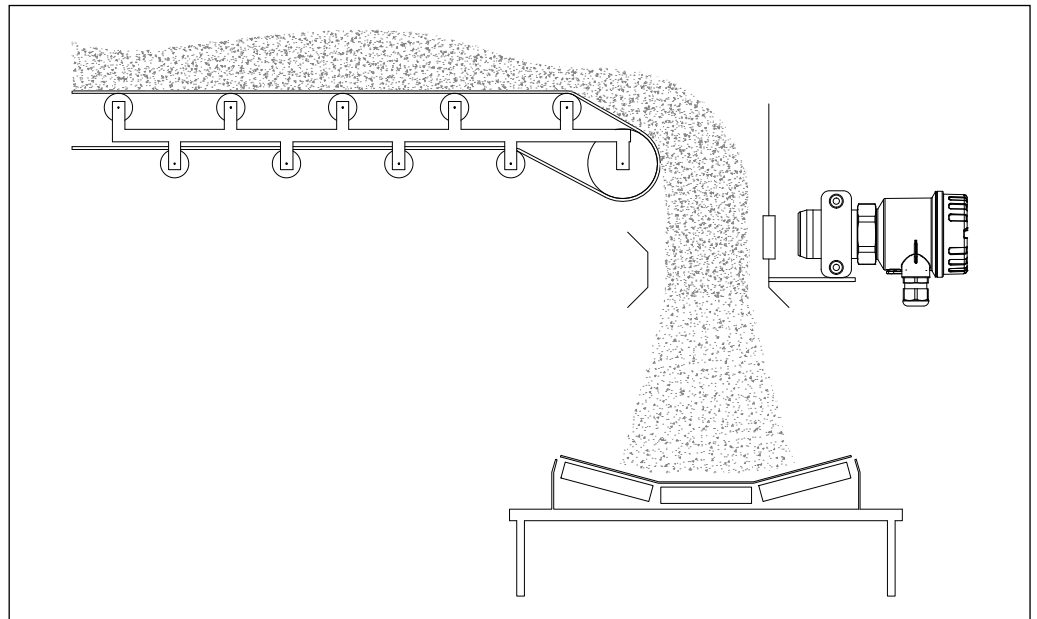

3 Example transition point monitoring

0000000246

The FTR20 monitors if there is material on the conveyor belt.

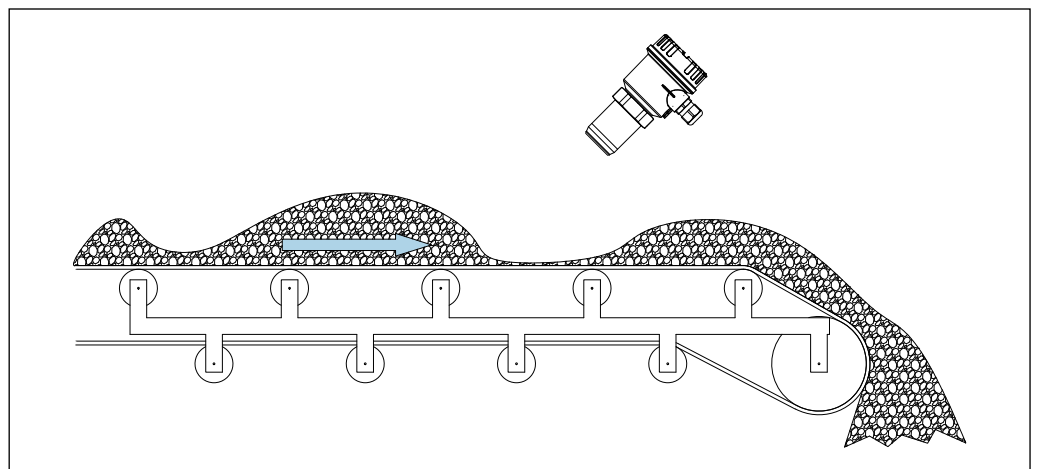


4 Example conveyor belt monitoring

0000000382

i For optimum mounting on the process, the device can be extended with appropriate accessories such as weld-in nozzles, sight glasses or high temperature adapters for process separation. → 25

Measuring system

The complete measuring system consists of the device FTR20, e.g. for connection to programmable logic controllers (PLC).

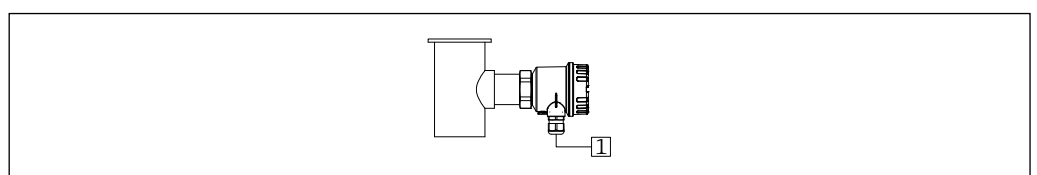

5 Example of a measuring system

0000000349


1 Power supply and switching unit, PLC etc.

Input

Measured variable	Doppler frequency
Measuring range (Detection range)	- With an unobstructed radiation path to the surface of the bulk solids, the maximum range is 20 m depending on bulk solids (reflection characteristics). - The range also depends on the container walls to be penetrated.
Operating frequency	24 GHz ISM
Transmitting power	The radiated power is maximum 100 mW e.i.r.p. (equivalent isotrope radiation performance). - Power density directly in front of the device: Approx. 1 mW/cm² - Power density at a distance of 1 m: Approx. 0.3 µW/cm²  The power density is clearly below the recommended limit values of the ICNIRP guidelines "Guidelines for Limiting Exposure to Time-Varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz)" and thus is completely harmless for humans.
Switching frequency	Max. 2 Hz
Antenna opening angle (3 dB)	Approx. ± 11°
Detectable speed	0.09 to 62 m/s (3.54 to 2441 in/s)

Output

Output signal	- Potential-free relay changeover contact (A) - Switching contact semiconductor relay (B) - Current 4-20 mA (C)
---------------	---

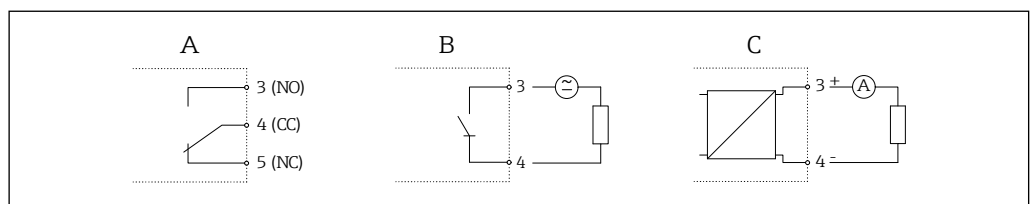

 6 Output signal

000000149

- A Relay
 B Solid-state relay
 C Current

Switching output	- Switching capacity - Relay: 250 V AC / 4 A, 125 V DC / 0.4 A or 30 V DC / 4 A (Harting connector 30 V AC / 60 V DC) - Solid-state relay: 30 V AC / 0.4 A or 40 V DC / 0.4 A - Switching delay parameterizable (off, 100 ms to 20 s) - Switching hysteresis adjustable - Switching frequency max. 2 Hz
------------------	--



- The contact material of the relay is also suitable for switching small signal circuits, if no inductive loads or higher currents have been switched previously.
- If the switching frequency is high, the solid-state relay should be selected.

Current output


- Current 4-20 mA, active
- Load max. 600 Ω



The value of the current output corresponds to the signal strength.

Terminal and connector assignment

A suitable wire or connector is used to connect the signal output of the FTR20 to the downstream evaluation. → 25

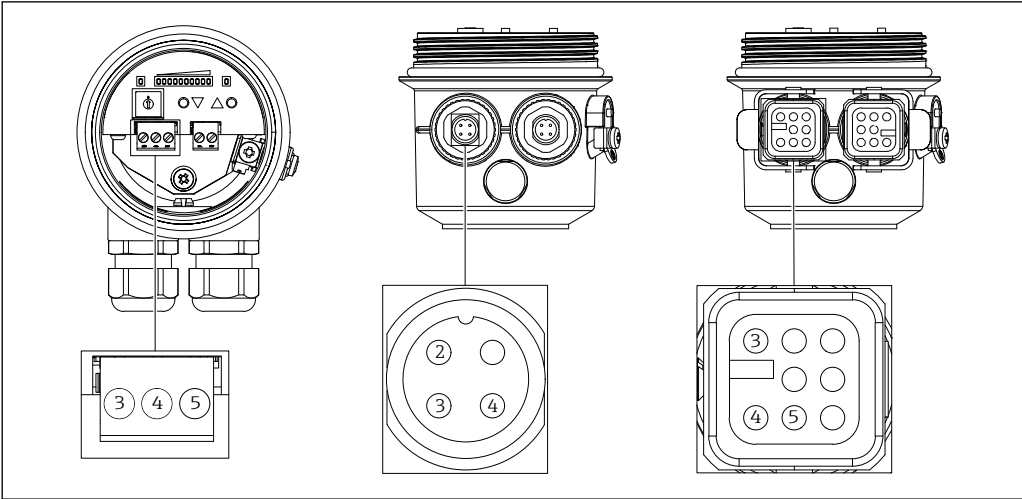

7 Terminal and connector assignment (Connector 2) output signal

0000000162

Electrical connection	Output signal		
	Relay	Solid-state relay	4-20 mA
Terminals	3(NO) - 4(CC) - 5(NC)	3 - 4	3(+) - 4(-)
Connector M12A	Connector 2, contact 2(NO) - 3(CC) - 4(NC)	Connector 2, contact 3 - 4	Connector 2, contact 3(+) - 4(-)
Connector Harting HAN8D	Connector 2, contact 3(NO) - 4(CC) - 5(NC)	Connector 2, contact 3 - 4	Connector 2, contact 3(+) - 4(-)


Ex connection data

See safety instructions (XA): All data relating to explosion protection are provided in separate Ex documentation and are available from the Downloads Area of the Endress+Hauser-website. The Ex documentation is supplied as standard with all Ex devices.

Power supply

Terminal and connector assignment

A suitable wire or connector is used to connect the FTR20 to the power supply. → 25

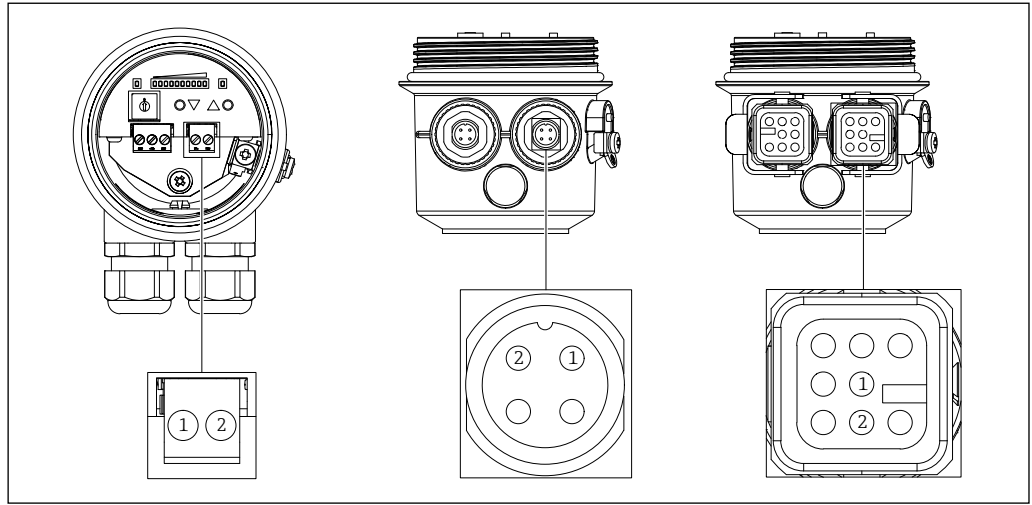

8 Electrical connection supply voltage

0000000163

Electrical connection	Supply voltage
Terminals	1 - 2
Connector M12A	Connector 1, contact 1 - 2
Connector Harting HAN8D	Connector 1, contact 1 - 2

Available connectors

- M12, A-coded, 4-pole, max. 0.75 mm²
- Harting HAN8D, 0.14 to 2.5 mm²

- i** ■ In the case of devices with a plug, it is not necessary to open the housing for connection purposes.
- Suitable mating connectors are available as an order variant or as accessories.
- Suitable mating prefabricated connection cables are available as accessories.
- Accessories → 25

Supply voltage

- 85 to 253 V AC, 50/60 Hz
- 20 to 60 V DC or 20 to 30 V AC, 50/60 Hz

- i** ■ The polarity of the supply voltage can be set as required.
- Provide overcurrent protection device (max. 10 A) for the supply voltage.
- In accordance with IEC/EN 61010 a suitable circuit breaker must be provided for the measuring device.
- The electrical connection with connector is only available for the power supply with 20 to 60 V DC or 20 to 30 V AC, 50/60 Hz (ordering option "E").

Power consumption

- 9 VA (85 to 253 V AC, 50/60 Hz)
- 2.4 W (20 to 60 V DC) / 4 VA (20 to 30 V AC, 50/60 Hz)

Potential equalization

Requirements:

- The potential equalization must be connected to the external ground terminal on the device.
- For optimum electromagnetic compatibility, keep the potential equalization line as short as possible.
- The recommended minimum cable cross-section is 2.5 mm².
- The potential equalization of the FTR20 must be included in the local potential equalization.

Ex connection data	See safety instructions (XA): All data relating to explosion protection are provided in separate Ex documentation and are available from the Downloads Area of the Endress+Hauser-website. The Ex documentation is supplied as standard with all Ex devices.
Terminals	Max. 1.5 mm ²
Cable entries	■ Cable gland M20 x 1.5 or cable entry ½ NPT ■ Degree of protection: IP66 ■ Cable gland (X): - Material: Plastic, Grey - Clamping range: 5 to 10 mm (0.2 to 0.39 in) (EN 61444) / 7 to 10 mm (0.28 to 0.39 in) (UL-514 B) - Tightening torque: max. 6 Nm ■ Cable gland (A): - Material: Nickel-plated brass, Silver - Clamping range: 7 to 10.5 mm (0.28 to 0.41 in) - Tightening torque: max. 10 Nm ■ Quantity: 2 pieces per device  Only use the cable gland for the connection of permanently installed cables and lines; the operator must ensure appropriate strain relief.
Cable specification	■ Normal instrument cable is sufficient ■ Conductor cross-section: max. 1.5 mm²
Overvoltage protection	Devices without optional overvoltage protection Equipment from Endress+Hauser fulfills the requirements of the product standard IEC/DIN EN 61326-1 (Table 2 Industrial Environment). Depending on the type of port (DC supply, input/output port) different test levels according to IEC/DIN EN 61326-1 against transient overvoltages (Surge) are applied (IEC/DIN EN 61000-4-5): Test level on DC power ports and input/output ports is 1 000 V line to earth Overvoltage category Overvoltage category II Pollution degree Pollution degree 2

Performance characteristics

Reference conditions	Each application is different with regard to its geometry (such as influencing reflection edges), the medium as well as the medium properties (such as attenuation and degree of humidity) and therefore always requires an individual basic adjustment of the flow indicator.
Influence ambient temperature	The ambient temperature has no direct influence on the device.
Influences on bulk flow detection	Distance of FTR20 from the medium The signal strength is influenced by the distance from the medium to the device. The installation location should be selected so that this distance is as small as possible. If the distance between the medium and the device fluctuates, the flow indicator must be calibrated under the most unfavorable conditions (at maximum distance).

Movement in the vicinity of the measuring point

The flow indicator also detects movements in the vicinity of the measuring point within the detection range, such as vibrating plant components, moving objects and persons. The installation location should therefore be selected so that there are as few moving sources of interference as possible in the surrounding area.

Vibration influence

Vibration resistance - vibration according to EN 60068-2-6

- Excitation: Sine
- Frequency range: 5 to 500 Hz
- Amplitude: 5 to 15 Hz (5.5 mm) peak / 15 to 500 Hz 5 g
- Passing speed: 1 octave per minute
- Test directions: 3 directions (X, Y, Z)
- Test duration: approx. 140 minutes per direction (approx. 70 minutes per temperature/direction)
- Test temperature: -40 to +70 °C

Shock resistance - shock according to EN 60068-2-27

- Excitation: half sine
- Shock duration: 18 ms
- Amplitude: 30 g
- Number of shocks: 3 per direction and temperature
- Test directions: 6 directions ($\pm X$, $\pm Y$, $\pm Z$)
- Test temperature: -40 to +70 °C

Mounting

Mounting location

The mounting location must be selected in such a way that application-specific influences are minimized.




- Observe mechanical protection of the equipment (for example in case of larger falling pieces of product). → 25
- In case of vibrating mounting locations use devices with encapsulated electronics (see ordering structure "Accessory mounted").
- Depending on the mounting location, different process adapters are available as accessories.



For a device for the hazardous area:
Observe the instructions in the Ex documentation (XA).

Mounting position

The installation position is arbitrary for the FTR20. However, a small angle α may increase the signal quality.

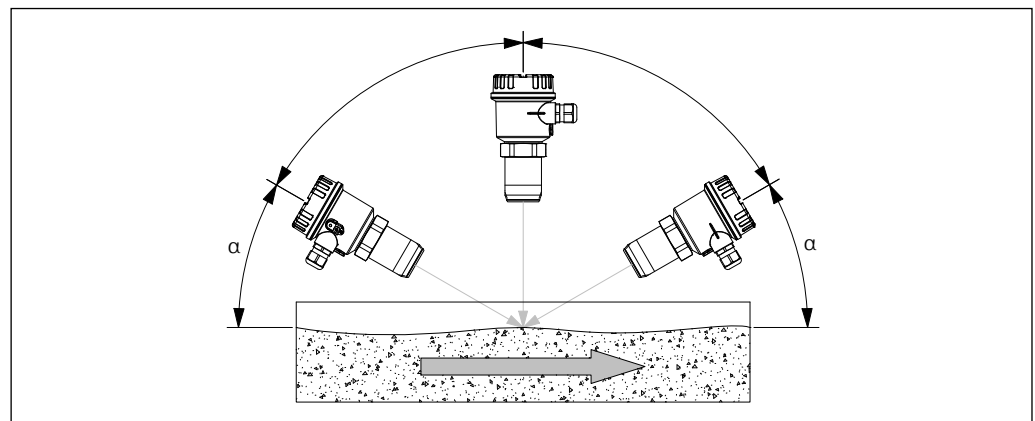

000000380

9 Mounting position

Installation instructions

Basically, there are two ways to mount the FTR20 device:


- Process-contact mounting: The process connection with the transmission window comes into direct contact with the medium.
- Mounting not in contact with the process: The process connection with the transmission window does not come into direct contact with the medium.



- For optimum alignment after mounting on the process, rotate the electronics housing as required (by 360°).
- Two FTR20s installed opposite each other can influence each other. We recommend frequency-selected devices for this installation situation (TSP 71274253/71274248).
- Extensive accessories are available for adapting to the respective process conditions.
→ 25

Mounting in contact with the process


Screw the device directly with its process connection (R 1½ according to EN 10226, 1½ NPT according to ANSI/ASME B1.20.1 or G 1½ according to ISO 228-1) into the process (e.g. into existing threads or container sockets).

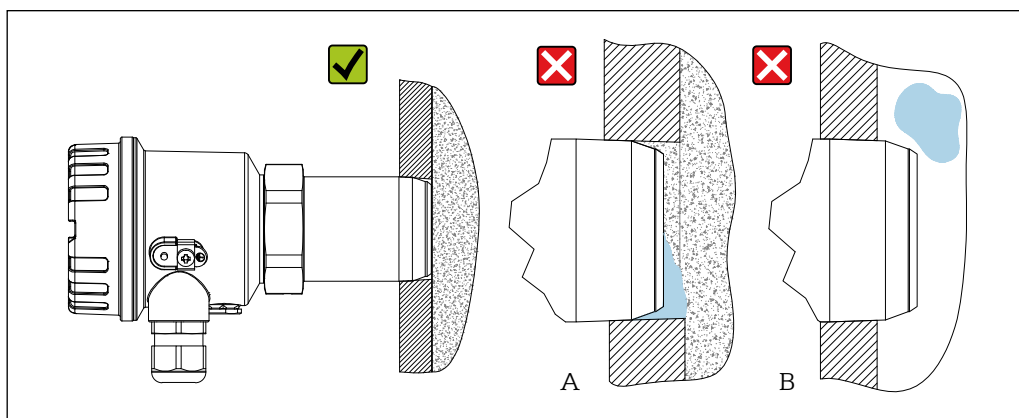

10 Direct mounting with threaded connection



- If the process connection is not screwed far enough into the process wall, there is a risk that material will accumulate in front of the device (A), thereby damping the microwave signal.
- If, on the other hand, the process connection is screwed too far into the process (B), there is a risk of damage occurring as a result of large product items falling.
- When using the G 1½ process connection (standard thread according to ISO 228-1, hexagon SW55) and using the optional counternut, the device can be mounted flush particularly easily, as it is a cylindrical thread.
- Weld-in adapters of type FAR52-A* with corresponding internal threads are available as accessories.
- In case of existing deviating female threads in the process wall (R 2 to R 4 or 2 NPT to 4 NPT), additional screw-in adapters of type FAR52-B* are available as accessories.
- Accessories → 25

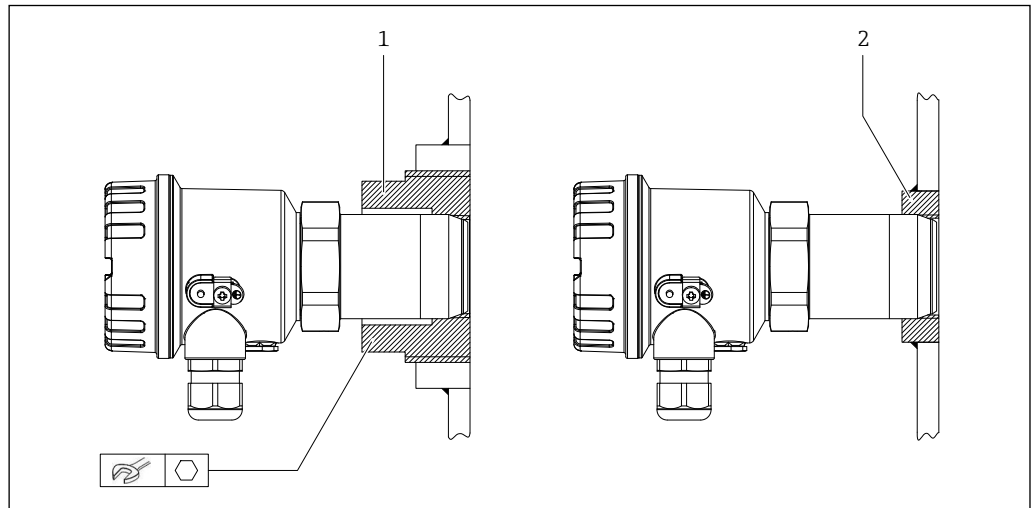


■ 11 Weld-in or screw-in adapter FAR52. Unit of measurement mm (in)

0000000168

- 1 Screw-in adapter
2 Weld-in adapter

Mounting samples

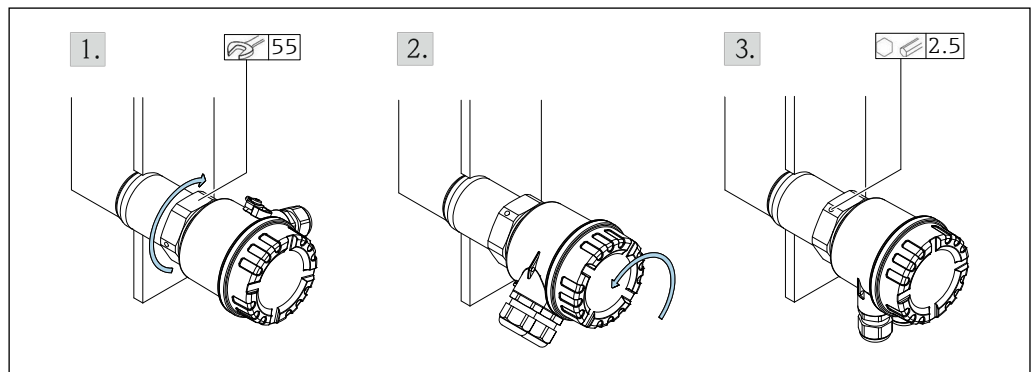

■ 12 Mounting with connection thread

0000000166

1. Screw in connection thread. For G 1½ thread: Tighten counternut.
2. Align the housing of the electronics.
3. Fix the housing in place.



All installation variants are sealed with a suitable sealant (to be provided by the customer).

Mounting not in contact with the process

The device is mounted in one of the following three ways:

- For a microwave-impermeable process wall (for example, metal vessel wall), mounting is done in front of microwave-permeable windows such as plastic plugs, ceramic disks, or sight glass fittings.
- In the case of a microwave-permeable process wall (for example, plastic container), mounting is carried out directly from the outside on the wall using appropriate adapters (for example, mounting brackets).
- For open processes, the mounting is arbitrary.


Mounting in front of microwave-impermeable process wall

If, due to process conditions (such as high temperatures, high pressures or hazardousness of the material), direct installation in the microwave-impermeable process wall is not possible, it is possible to have the device radiated through an additionally installed plug.

The following materials have been tested and are suitable for radiating through:

- Plastics (virginal, unfilled) such as Polytetrafluoroethylene (PTFE), Polyethylene (PE) or Polypropylene (PP)
- Aluminum oxide ceramics (purity min. 99 %, uncolored)
- Borosilicate glass (uncolored)

- i**
- The maximum temperature **T** at the process connection must be observed. → 19
 - When mounting in front of a microwave-permeable plug and the risk of condensation forming on the inner wall of the process, use a plug (2) that protrudes into the process.
 - The distance **A** depends on the free passage area **D**. Select a distance as small as possible to avoid possible signal attenuation (for example, max. 40 mm (1.57 in) with a passing surface of 50 mm (1.97 in)).
 - Depending on the material, coloring or added (colored) additives can sometimes cause high signal attenuation and are therefore generally unsuitable for this application.
 - Matching plugs made of PTFE or aluminum oxide ceramic of type FAR54 are available in different lengths and diameters as accessories. → 30

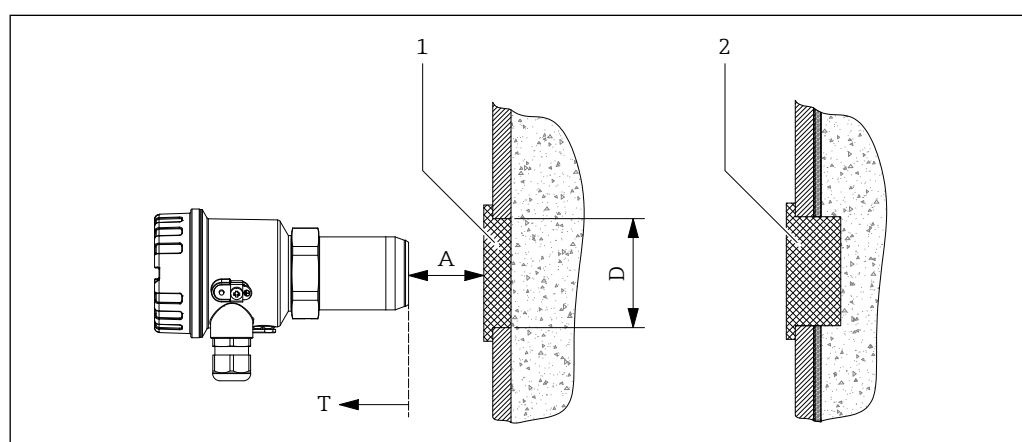


13 Mounting in front of microwave-impermeable process wall

- 1 Microwave-permeable plug
2 Microwave-permeable plug in case of condensate formation on the inner process wall

Mounting with weld-in adapter with mounting arm

For unpressurized applications under normal ambient and process temperatures, this weld-in adapter enables simple installation in the process wall; a PE-UHMW plug ensures safe separation of the device and process. For servicing, only the mounting bracket is loosened and the device is removed, the process remains separated.

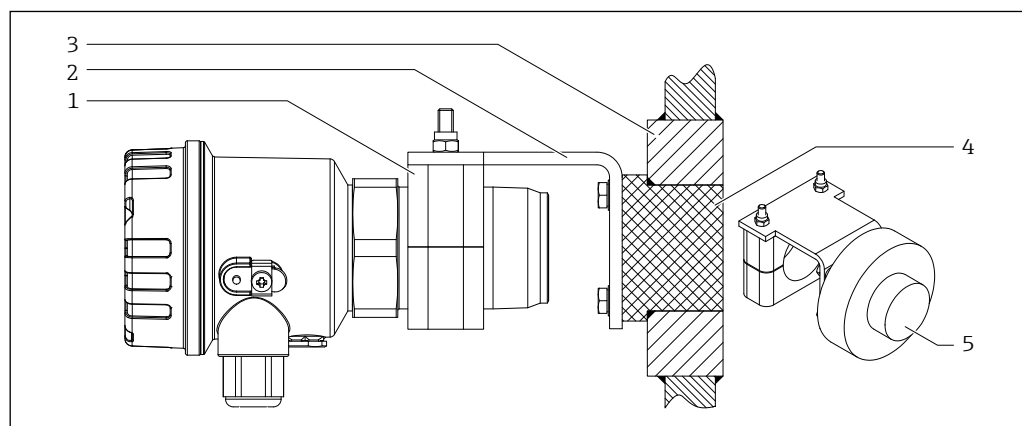

14 Weld-in adapter for pressureless processes


- 1 Mounting bracket
2 Mounting arm
3 Weld-in adapter
4 Microwave-permeable plug
5 Microwave-permeable plug in case of condensate formation on the inner process wall or inner process linings

i Suitable weld-in adapter with mounting arm
→ 27

Mounting in front of microwave permeable sight glass fitting

If the process wall cannot be radiated through, it is also possible to have the device radiated from the outside through a suitable sight glass fitting. The sight glass in these fittings is made of uncolored borosilicate glass.

- i** The maximum temperature at the process connection must be observed. → 19
- i** The distance **A** depends on the free passage area **D**. Select a distance as small as possible to avoid possible signal attenuation (for example, max. 40 mm (1.57 in) with a passing surface of 50 mm (1.97 in)).

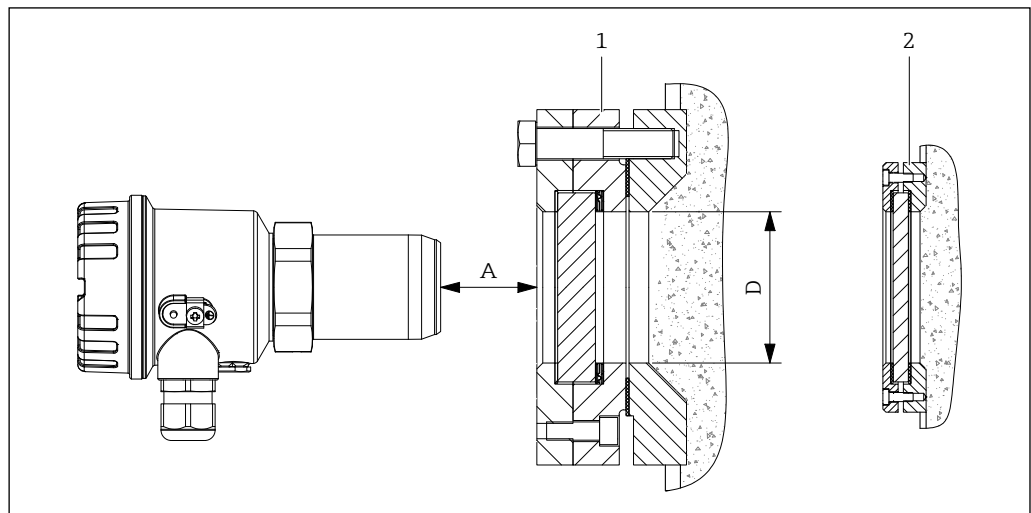


15 Mounting in front of microwave permeable sight glass fitting

0000000164

- 1 Sight glass fitting for processes up to 10 bar (145 psi) absolute
- 2 Sight glass fitting for unpressurized processes


Always install sightglasses only in places where no material can accumulate on the process side (risk of incorrect measurements).

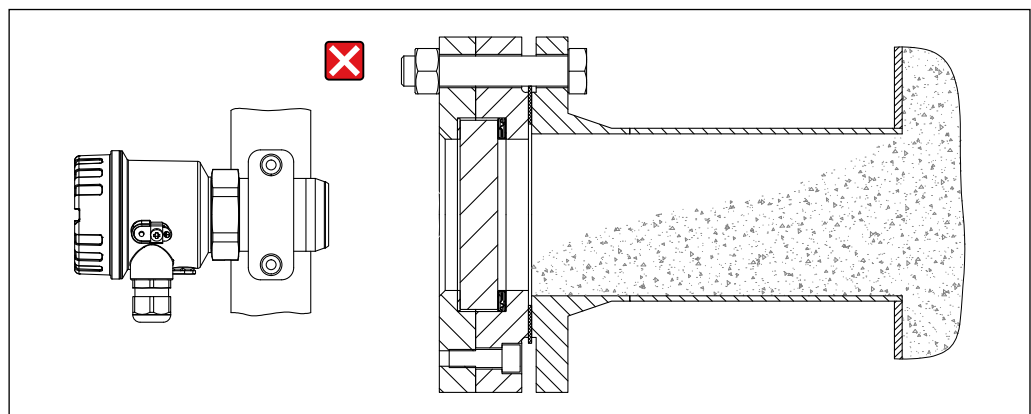

16 Impermissible mounting with the risk of material accumulation

0000000152

i Suitable sight glass fittings and individual sight glass plates are available as accessories in various designs. → 30

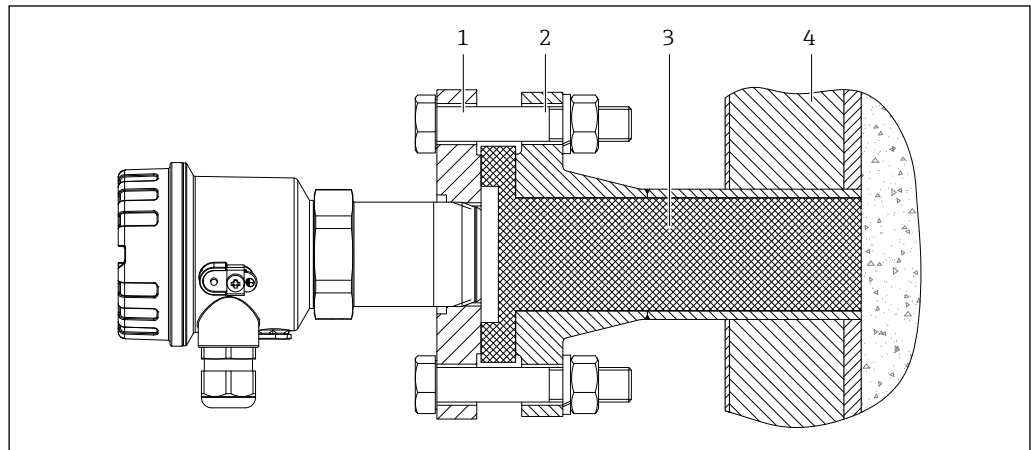

0000000192


18 Mounting on process nozzle

- 1 Mounting flange
- 2 Existing process nozzle
- 3 Plug
- 4 Process insulation

- i** Suitable mounting flanges with corresponding stainless steel connection threads and plugs made of PTFE or aluminum oxide ceramic for existing process nozzles are available as accessories.
- Process nozzles of type FAR50, consisting of connection nozzle, plug and mounting flange, are available as accessories in different sizes and materials.
- Accessories → 25

If there is a risk of buildup, avoid assembly methods that could promote this process.


- i** In the case of a non-vertical process wall, mount the process nozzle so far into the process that no material can accumulate in front of it (A).
- When mounting the process nozzle and there is a risk of material accumulating on the inner process wall, use a nozzle that protrudes into the process (B).
- The maximum plug length depends on the attenuation and the water absorption of the material; manufacturer's instructions in this respect must be observed.
- If there is a risk of condensation forming between the process connection of the device and the plug, use the process connection piece type FAR50, this is equipped with a mounting flange with pressure compensation element. → 32

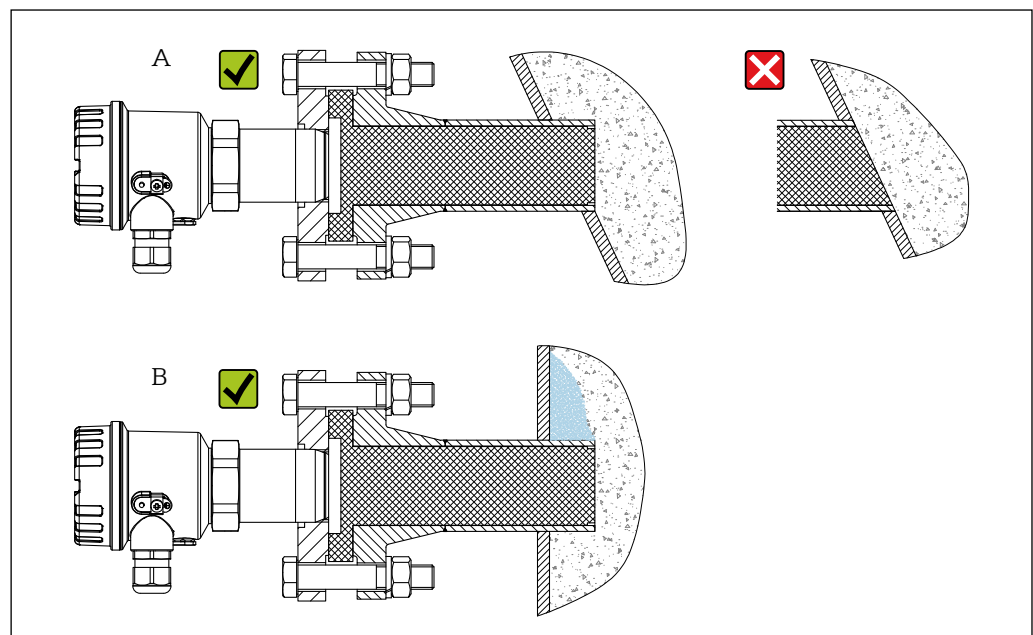

0000000153

19 Mounting with risk of buildup

For existing process nozzles, the optionally available plug-in adapters of type FAR51 can be used. These are simply plugged in and fixed, which significantly reduces the mounting effort (also with regard to maintenance).

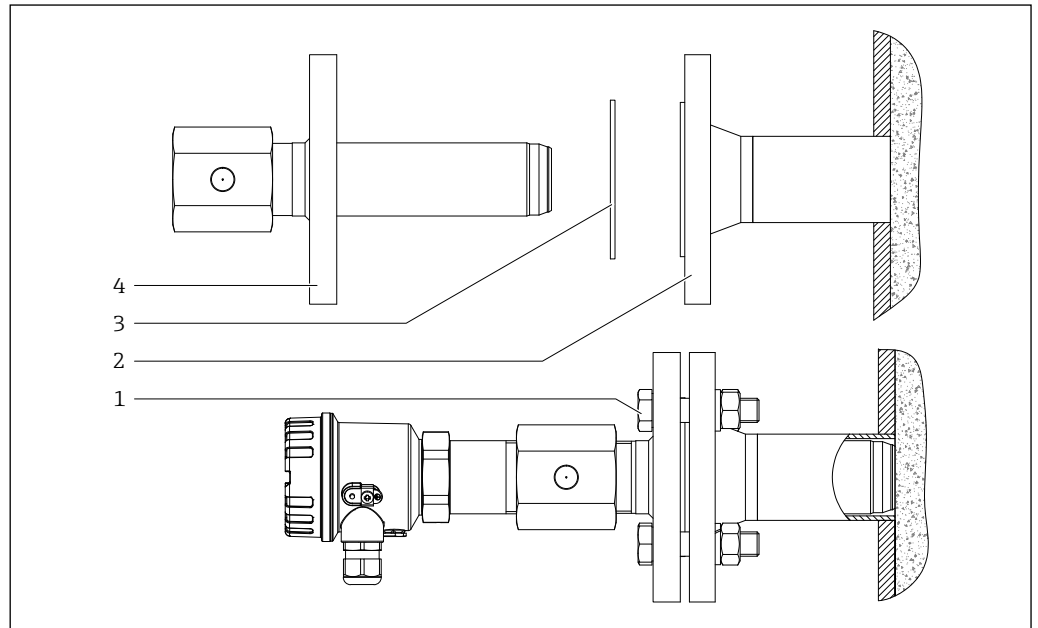

20 Mounting with insertion adapter FAR51

0000000279


- 1 Customer-supplied installation material
- 2 Process nozzle
- 3 Customer-supplied gasket
- 4 Insertion adapter

i For process temperatures of +70 to +450 °C (+158 to +842 °F), plug-in adapters for existing process connections of type FAR51 made of stainless steel are available as accessories.
→ 32

Mounting with high pressure adapter

For applications with high process pressure up to 21 bar (305 psi), absolutely use the following high-pressure adapter. → 29

i The maximum temperature at the process connection must be observed.
→ 19

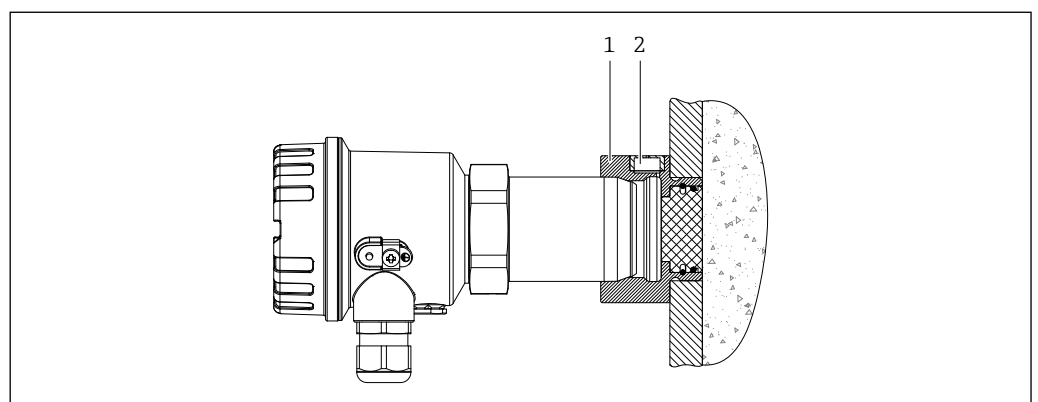

21 Mounting with high pressure adapter

0000000195


- 1 High pressure adapter
- 2 Integrated venting element

Mounting with high temperature adapter and extensions

For simple and easily accessible high temperature applications in the range of +70 to +450 °C (+158 to +842 °F), there is a simple adapter with flush aluminum oxide ceramic, this can be extended with extensions.



- The maximum process pressure of 0.8 to 5.1 bar (12 to 74 psi) absolute at the high temperature adapter must be observed. → 19
- The maximum temperature T at the process connection of the device must be observed; exceeding this will lead to destruction.
- L must be selected depending on the process and ambient temperatures.
- Suitable high temperature adapters and stainless steel extensions are available as accessories. → 34

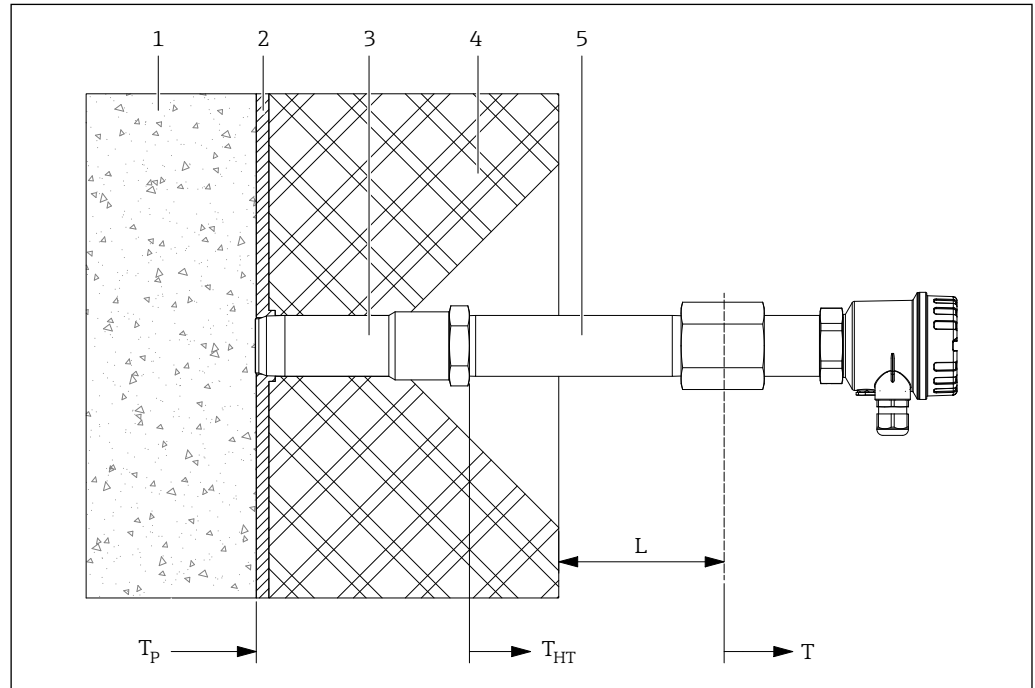

0000000308

22 Mounting with high temperature adapter and extensions

- 1 Process
- 2 Wall
- 3 High temperature adapter
- 4 Insulation
- 5 Length extensions (optional)

Observe the following temperatures:


- Temperature $T_P \leq +450\text{ °C (+842 °F)}$ at the process connection of the high-temperature adapter
- Temperature $T \leq +70\text{ °C (+158 °F)}$ at the device connection
- Temperature $T_{HT} \leq +160\text{ °C (+320 °F)}$ on the internal thread of the high-temperature adapter when using the extension, otherwise $T_{HT} \leq T$



L must be selected depending on the process and ambient temperatures.

Mounting with spacer tube (wave guide)

For many processes, mounting with a spacer tube is a simple and cost-effective way of separating the devices from the high process temperatures of +70 to +450 °C (+158 to +842 °F). The spacer tube can be secured in place in various ways, depending on the application conditions (e.g. screwed into the process wall, bolted-on mounting brackets, welded or clamped to available cross beams). We also recommend this mounting method for processes that are lined with clay or similar materials on the inside. The spacer tube can be glued into place, for example.

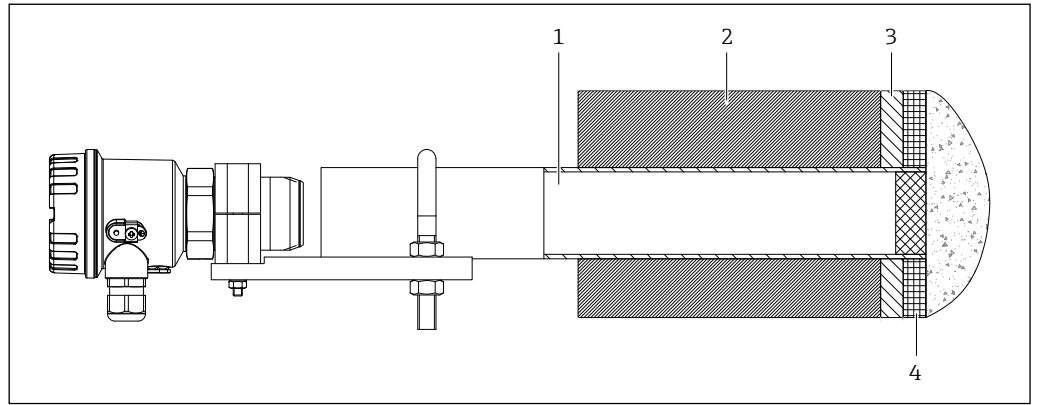


23 Mounting with spacer tube (wave guide)

- 1 Spacer tube
- 2 Process insulation
- 3 Process wall
- 4 Inner lining

i Suitable spacer tubes of type FAR53, made of steel or stainless steel, are available as accessories in different versions. → 33

Mounting for open processes

Mounting in open processes can be done with a simple mounting bracket.

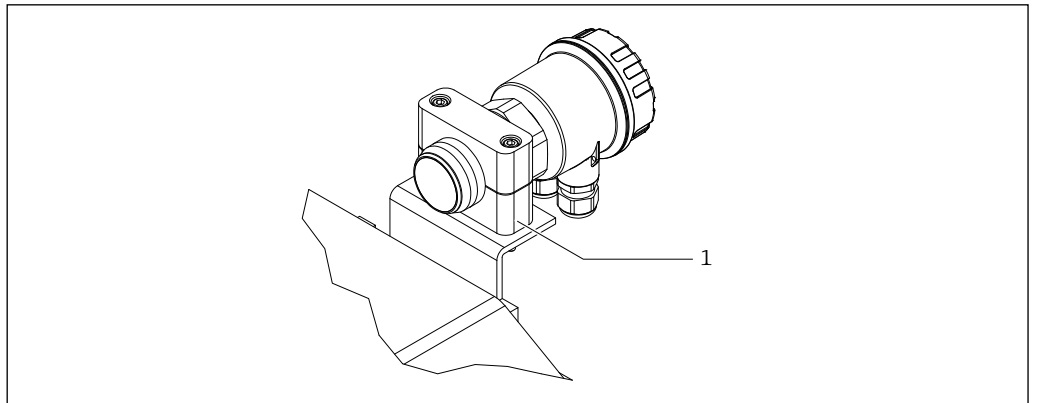

24 Mounting for open processes

- 1 Mounting bracket

i Suitable mounting brackets made of plastic or aluminum are available as accessories. → 26

Environment

Ambient temperature

-40 to +70 °C (-40 to +158 °F)

For outdoor operation in strong sunlight:

- Mount the device in the shade
- Avoid direct sunlight, particularly in warmer climatic regions
- Use weather protection cover (Accessories → 35)

Storage temperature

See ambient temperature

Humidity

Operation up to 100 %. Do not open in a condensing atmosphere.

Operating height	Up to 2000 m (6600 ft) above sea level
-------------------------	--

Degree of protection	■ IP66 (with closed housing) ■ IP20 (with open housing)
-----------------------------	--

Vibration resistance and shock resistance	See vibration influence →  10
--	--

Pollution degree	Pollution degree 2
-------------------------	--------------------

Electromagnetic compatibility	■ Interference emission to EN 61326, Electrical Equipment Class B ■ Interference immunity to EN 61326, Appendix A (Industrial)
--------------------------------------	---

Process


Process temperature	■ -40 to +70 °C (-40 to +158 °F) ■ -20 to +450 °C (-4 to +842 °F) with optional high temperature adapter ■ Observe deviating temperature ranges for the accessories offered!
----------------------------	--

Process pressure	■ 0.5 to 6.8 bar (7 to 99 psi) absolute, only to be observed for direct process mounting ■ 0.8 to 5.1 bar (12 to 74 psi) absolute, when using the optional high temperature adapter ■ 0.5 to 21 bar (7 to 305 psi) absolute, when using the optional high pressure adapter ■ Observe deviating pressure ranges for the accessories offered!
-------------------------	--

Vibrations	See vibration influence →  10
-------------------	--

Mechanical construction

Dimensions

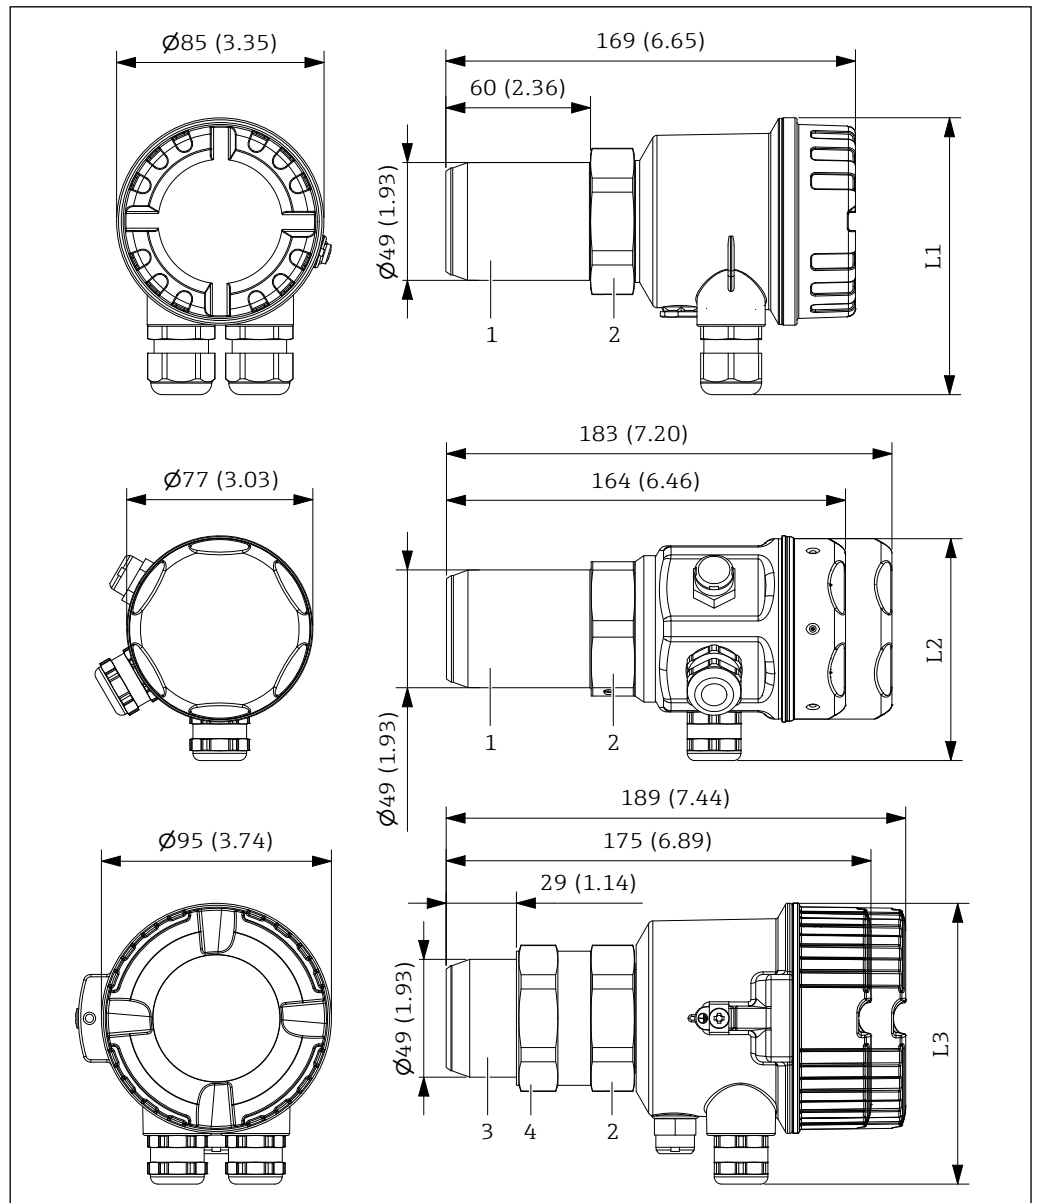

25 Dimensions. Unit of measurement mm (in)

0000000154

- 1 Connection thread R 1½ / 1½ NPT
- 2 Hexagon SW55
- 3 Connection thread G 1½
- 4 Counternut (SW55)

Dimensions L1 to L3, depending on the housing and electrical connection:

Electrical connection	Housing (dimension)		
	F16 (L1) mm (in)	F15 (L2) mm (in)	F34 (L3) mm (in)
M20 cable gland	114 (4.49)	93 (3.66)	116 (4.57)
Thread 1/2" NPT	111 (4.37)	94 (3.70)	117 (4.60)
Connector M12A	101 (3.98)	88 (3.46)	111 (4.37)
Connector Harting HAN8D	133 (5.24)	120 (4.72)	143 (5.63)

Weight	■ Depending on the selected housing and process connection (max. 1.7 kg (3.75 lb)) ■ On device variants with connector and extended ordering option "Electronics, encapsulated" the weight increases by 0.2 kg (0.44 lbs).
Materials	■ Stainless steel 316Ti (1.4571): - Process connection - Pressure equalization element (F15/F34 housing) ■ Stainless steel 316L (1.4435): - F15 housing - Adapter ½ NPT (F15/F34 housing) ■ Aluminum: - Process connection - F34 housing ■ Plastic: - F16 housing - M20 cable gland, adapter ½ NPT and pressure equalization element (F16 housing) ■ Die-cast zinc: - M12 connector, nickel-plated - Harting connector, powder-coated ■ Brass, nickel-plated: M20 cable gland (F15/F34 housing)
Process connection	Connection thread: ■ R 1½ in accordance with EN 10226 ■ 1½ NPT in accordance with ANSI/ASME ■ G 1½ in accordance with ISO 228-1

Operability


By using frequencies in the 24 GHz range, also products with low attenuation can be detected, even if the product quantities are low.

- Adjustable sensitivity
- Switchable limit signal function
- Adjustable switching hysteresis (switching output)
- Switching delay (switching output)
 - 100 ms to 20 s
 - Switch-on and switch-off delay, can be selected separately
- Adjustable damping
- LED signal strength indicator as adjustment and positioning aid

Operation concept

The FTR20 is configured using the function selection and the two operating keys. By doing so, calibration to a sensitivity necessary for clear and unambiguous material flow identification is carried out. If the movement of the bulk solids is sufficient, the FTR20 responds with an output signal to this effect.

The parameterization is stored internally and is retained even after the supply voltage is removed. No operation is required while the device is working. Adaptation to the application must only be carried out during initial installation. However, subsequent changes can be made and saved at any time.

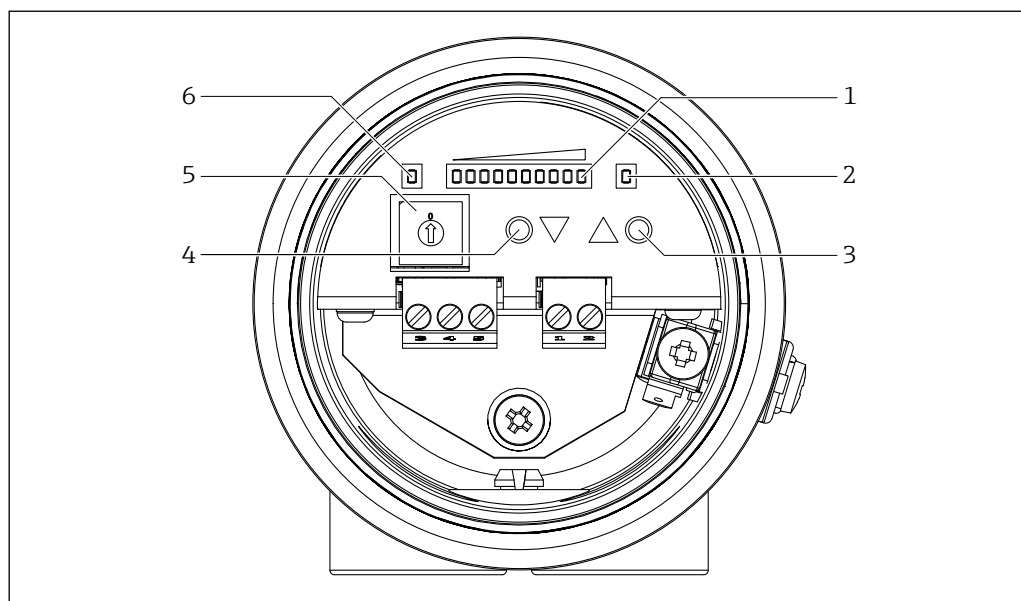

26 Display and operating elements of the FTR20

0000000354

- 1 Display
 - Normal operation: Signal strength
 - Configuration mode: Function number and function value
- 2 Switch output LED (yellow), only relay
- 3 Operating button ▲ (increase or toggle)
- 4 Operating button ▼ (decrease or toggle)
- 5 Function selection switch
- 6 Ready for operation LED (green)

On-site operation

Parameter configuration on the FTR20 is performed as follows:

1. Select any function (for details see Operating Instructions → 35)
 - Encoding switch (1) = 1 to F
 - The display shows the selected function for two seconds. Example function 3:
 2. Setting the selected function
 - Example: Function 3 (manual adjustment with movement of bulk solids)
 - Reduce sensitivity (operating button ▼):
 - Increase sensitivity (operating button ▲):
 3. The configured value is stored as soon as the function is switched. The value can be displayed again at any time by selecting the corresponding programming function and changed if necessary.
 4. After completion of the parameterization (after adaptation of the microwave barrier to the respective bulk material), return the coding switch to the "0" position, the FDR56 is now ready for operation.
- i** ■ Toggling the encoding switch position unequal "0" (function selection) puts the FTR20 into parameter configuration mode. The flow detection continues to work in the background, changed settings are taken into account directly.
- For current output, the yellow LED (switching output) has no function and remains off.

Local display


Display

The signal strength as well as the configured values (in the function selection) are displayed locally using a bar graph display. In addition, a green LED indicates that the device is ready to operate (supply voltage is present) and a yellow LED displays the status of the switch output (function 6 = standard setting, LED off: relay in rest position, solid-state relay high-impedance).

Output signal

The following overview exemplarily shows the behavior of the possible signal outputs with regard to the display of the signal strength during minimum or absent bulk flow and maximum bulk flow (function 6 = standard setting), with an optimally performed synchronization.

The value of the current output corresponds to the signal strength (1 LED = 1.6 mA).

Bulk movement	Signal strength	Switch output (LED yellow)	Output signal		
			Relay	Solid-state relay	4-20 mA
			Contact 3-4 closed	Contact closed (low-resistance)	20 mA
			Contact 4-5 closed	Contact open (high-resistance)	4 mA

Certificates and approvals

CE mark	The Solimotion flow indicator meets the legal requirements of the applicable EU guidelines. These are listed in the corresponding EU Declaration of Conformity, together with the applied standards. By applying the CE mark, Endress+Hauser confirms that the device has passed the necessary tests.
Ex approval	All explosion protection data is listed in separate documentation which is available from the download area. The Ex documentation is supplied as standard with all Ex-systems.
RoHS	The flow indicator complies with the substance restrictions of the Restrictions of Hazardous Substances Directive 2011/65/EU and the Delegated Directive 2015/863/EU.
Telecommunications	EN 300440 Short range radio devices (SRD) – radio devices for operation in a frequency range of 1 GHz to 40 GHz
Food suitability	The materials in contact with the process meet the requirements of EU Regulation 1935/2004 and 2023/2006 for some device variants (for details see corresponding manufacturer's declaration).

Ordering information

Detailed ordering information is available from the following sources:

- In the Product Configurator on the Endress+Hauser website: www.endress.com → Click "Corporate" → Select your country → Click "Products" → Select the product using the filters and search field → Open product page → The "Configure" button to the right of the product image opens the Product Configurator.
- Endress+Hauser sales center: www.addresses.endress.com

Product Configurator – the tool for individual product configuration

- Up-to-the-minute configuration data
- Depending on the device: Direct input of measuring point-specific information such as measuring range or operating language
- Automatic verification of exclusion criteria
- Automatic creation of the order code and its breakdown in PDF or Excel output format

TAG**Measuring point (TAG)**

The device can be ordered with a tag name.

Position of the tag name

In the additional specification, select:

- Tag plate, stainless steel
- Plastic film
- Supplied plate

Definition of the tag name

In the additional specification, specify:

3 lines, each containing up to maximum 18 characters

The specified tag name appears on the selected label.


Scope of delivery

The scope of delivery includes the FTR20 in a box with Brief Operating Instructions included.

Accessories

Various accessories are available and can be ordered with the device or at a later stage from Endress+Hauser. Detailed information on the order code in question is available from your local Endress+Hauser sales center or on the product page of the Endress+Hauser website:

www.endress.com.

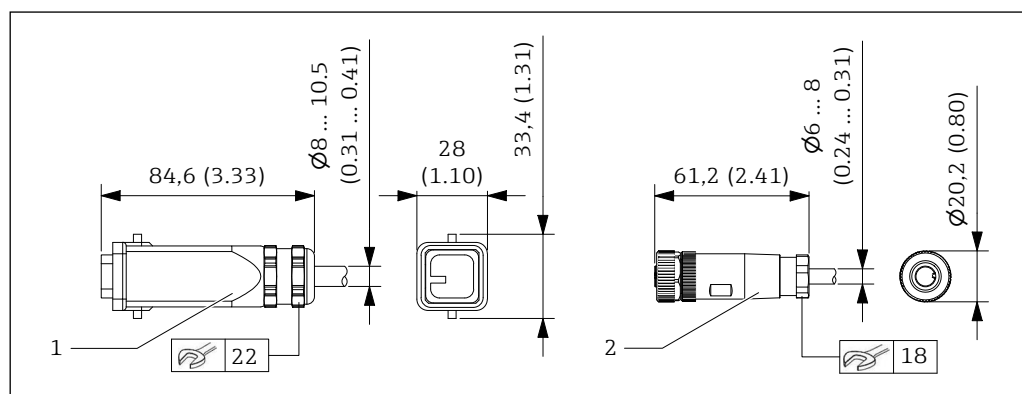
Mating connectors

27 Mating connectors. Unit of measurement mm (in)

- 1 Harting cable socket
2 M12 cable socket

■ **Order number:**


- 71381872 (M12, A-coded, 4-pole, max. 0.75 mm²)
- 71381882 (Harting HAN8D, 0.14 to 2.5 mm²)

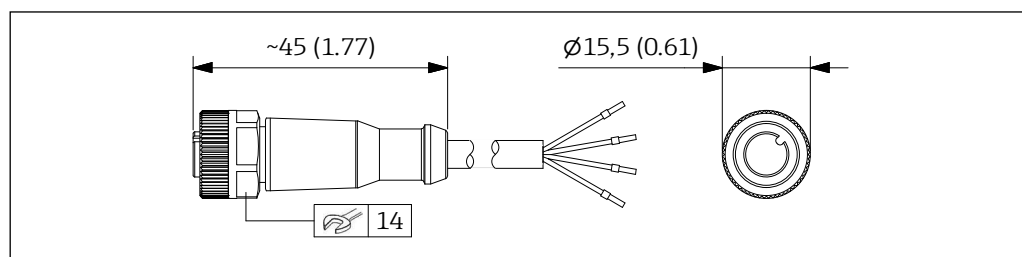Pre-fabricated connection cables

28 Connection cable with M12 plug. Unit of measurement mm (in)

- M12 connector, A-coded
- Number of poles/cross section: 4 x 0.34 mm²
- Operating temperature range: -25 to +90 °C (-13 to +194 °F)
- Materials:
 - TPU (housing)
 - FKM (seal)
 - PUR (cable)
- Protection: IP65, IP67, IP68, IP69K
- Order number:
 - 71381853 (2 m (78.74 in))
 - 71381870 (5 m (196.85 in))

Mounting bracket

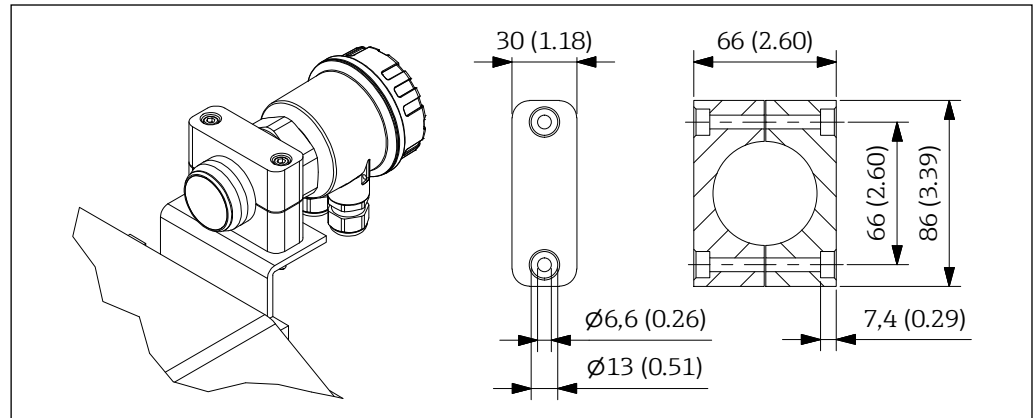


■ 29 Dimensions mounting bracket. Unit of measurement mm (in)

0000000271

- Material: Plastic or aluminum
- Operating temperature:
 - Plastic: -20 to +70 °C (-4 to +158 °F)
 - Aluminum: -40 to +70 °C (-40 to +158 °F)
- Weight: max. 0.22 kg (0.49 lb)
- Mounting screws (2 x M6): to be provided by customer
- Order number:
 - 52017501 (Aluminum)
 - 52017502 (Plastic)

Weld-in adapter

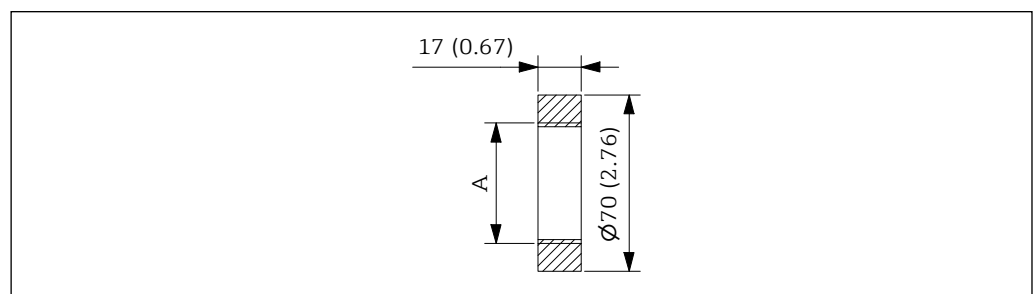


■ 30 Dimensions FAR52-A. Unit of measurement mm (in)

0000000138

- Type FAR52-A → ■ TI01369F
- Weld-in adapter with internal thread (A) Rp 1½, 1½ NPT and G 1½
- Material: 316Ti (1.4571), steel P235GH (1.0345)
- Weight: FAR52-A AAAA1A approx. 0.3 kg (0.66 lb)

Screw-in adapter

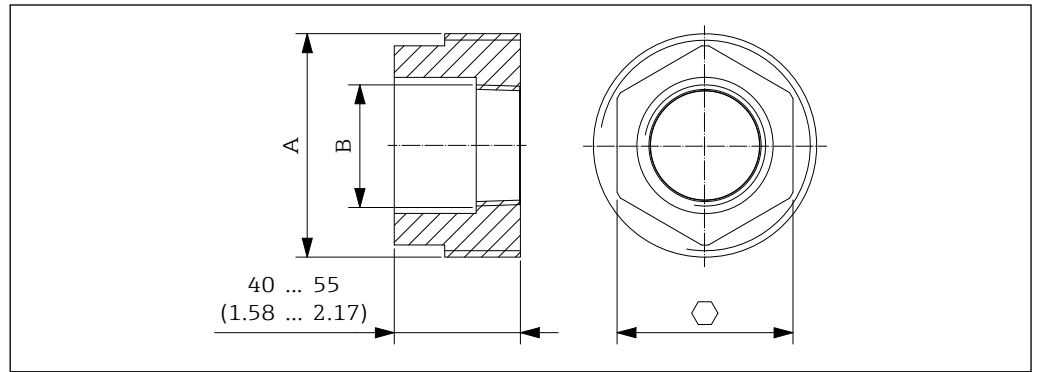


31 Dimensions FAR52-B. Unit of measurement mm (in)

0000000288

- Type FAR52-B → TI01369F
- Screw-in adapter for thread R 2 to R 4 and 2 NPT to 4 NPT, with internal thread R 1½ or 1½ NPT
- Material: 316Ti (1.4571), steel P235GH (1.0345)
- Weight: FAR52-BVL22B approx. 1.8 kg (4 lb)

Weld-in adapter with mounting arm

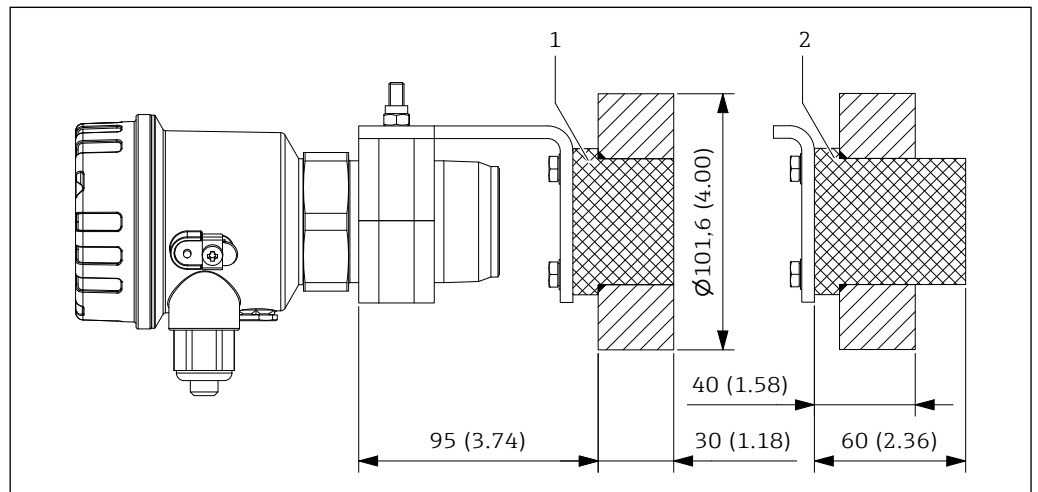


32 Dimensions weld-in adapter. Unit of measurement mm (in)

0000000287

- 1 Type SALS/SPPS
- 2 Type SAL/SPP

- Material:
 - Mounting arm: Stainless steel 304 (1.4301)
 - Mounting bracket: Plastic or aluminum
 - Weld-in adapter: Stainless steel 304 (1.4301)
 - Plug: Plastic PE-UHMW
- Operating temperature:
 - Mounting bracket aluminum: -40 to +70 °C (-40 to +158 °F)
 - Mounting bracket Plastic: -20 to +70 °C (-4 to +158 °F)
- Weight: approx. 2.6 kg (5.73 lb)
- Mounting screws enclosed
- Order number:
 - 71516954 Type SPPS (Mounting bracket plastic, short plug)
 - 71516947 Type SPP (Mounting bracket plastic, long plug)
 - 71516952 Type SALS (Mounting bracket aluminum, short plug)
 - 71516949 Type SAL (Mounting bracket aluminum, long plug)
- Plug (spare part)
 - 71517822 (Type SAL/SPP)
 - 71517824 (Type SALS/SPPS)


Mounting flange

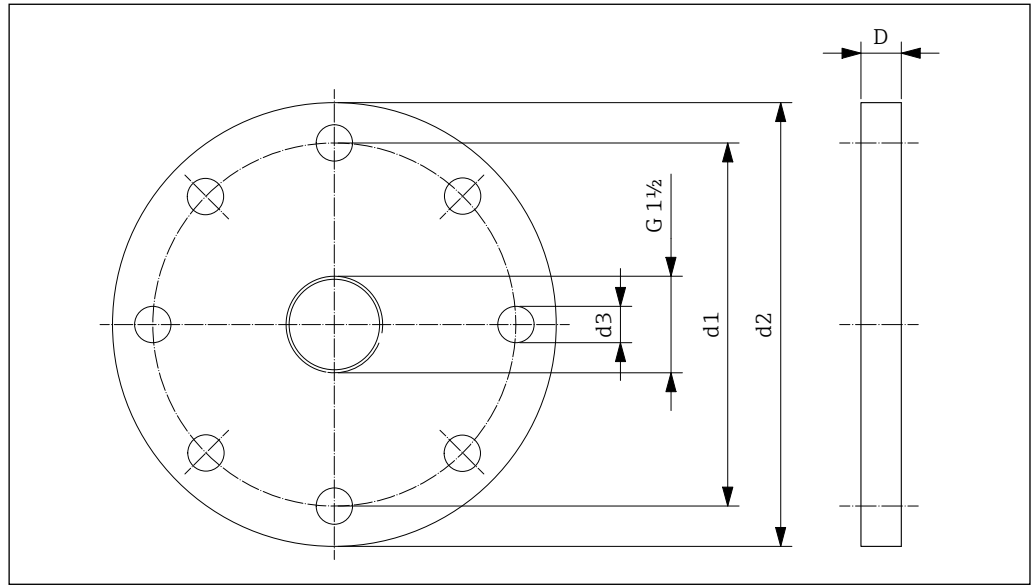

33 Dimensions mounting flange (Connection dimensions according to DIN EN 1092-1)

Flange	d1 mm (in)	d2 mm (in)	d3 mm (in)	D mm (in)	Holes
DN40 PN40	110 (4.33)	150 (5.91)	18 (0.71)	18 (0.71)	4
DN50 PN16	125 (4.92)	165 (6.50)	18 (0.71)	18 (0.71)	4
DN100 PN16	180 (7.09)	220 (8.66)	18 (0.71)	20 (0.79)	8

- Connection dimensions according to DIN EN 1092-1
- Material: 316Ti (1.4571)
- Weight: DN40 approx. 2.3 kg (5.07 lb) to DN100 approx. 5.8 kg (12.79 lb)
- Mounting screws and gasket: to be provided by customer
- Order number:
 - 71006348 (DN40 PN40, Rp 1½)
 - 71108383 (DN40 PN40, Rp 1½), with inspection certificate EN 10204 - 3.1 material
 - 71381884 (DN40 PN40, G 1½)
 - 71381885 (DN40 PN40, G 1½), with inspection certificate EN 10204 - 3.1 material
 - 71006350 (DN50 PN16, Rp 1½)
 - 71108388 (DN50 PN16, Rp 1½), with inspection certificate EN 10204 - 3.1 material
 - 71381887 (DN50 PN16, G 1½)
 - 71381888 (DN50 PN16, G 1½), with inspection certificate EN 10204 - 3.1 material
 - 71006352 (DN100 PN16, Rp 1½)
 - 71108390 (DN100 PN16, Rp 1½), with inspection certificate EN 10204 - 3.1 material
 - 71381890 (DN100 PN16, G 1½)
 - 71381891 (DN100 PN16, G 1½), with inspection certificate EN 10204 - 3.1 material

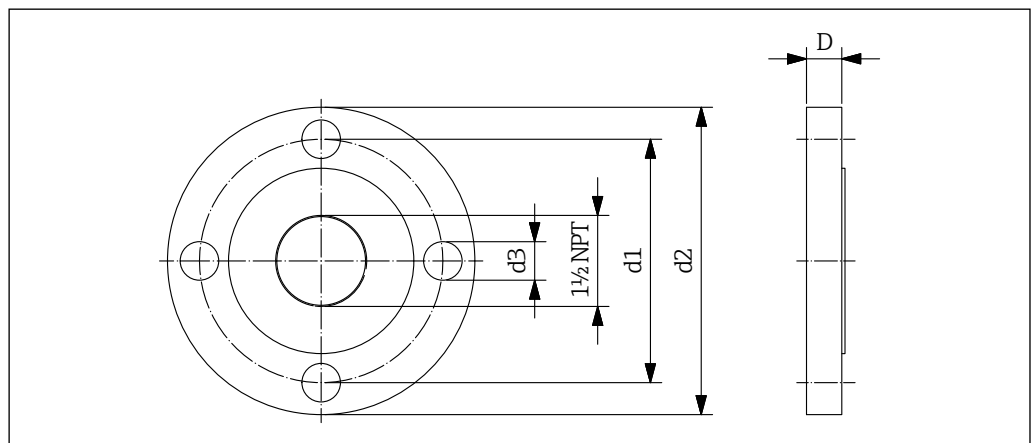


34 Dimensions mounting flange (Connection dimensions according to ANSI/ASME B16.5)

Flange	d1 mm (in)	d2 mm (in)	d3 mm (in)	D mm (in)	Holes
1½" 150 lbs	98.6 (3.88)	127 (5.00)	15.7 (0.62)	17.5 (0.69)	4
2" 150 lbs	120.7 (4.75)	152.4 (6.00)	19.1 (0.75)	19.1 (0.75)	4
4" 150 lbs	190.5 (7.50)	228.6 (9.00)	19.1 (0.75)	23.9 (0.94)	8

- Connection dimensions according to ANSI/ASME B16.5
- Material: 316Ti (1.4571)
- Weight: 1½" approx. 1.5 kg (3.31 lb) to 4" approx. 6.8 kg (15.0 lb)
- Mounting screws and gasket: to be provided by customer
- Order number:
 - 71006349 (1½" 150 lbs, 1½ NPT)
 - 71108387 (1½" 150 lbs, 1½ NPT), with inspection certificate EN 10204 - 3.1 material
 - 71006351 (2" 150 lbs, 1½ NPT)
 - 71108389 (2" 150 lbs, 1½ NPT), with inspection certificate EN 10204 - 3.1 material
 - 71006353 (4" 150 lbs, 1½ NPT)
 - 71108391 (4" 150 lbs, 1½ NPT), with inspection certificate EN 10204 - 3.1 material

High pressure adapter

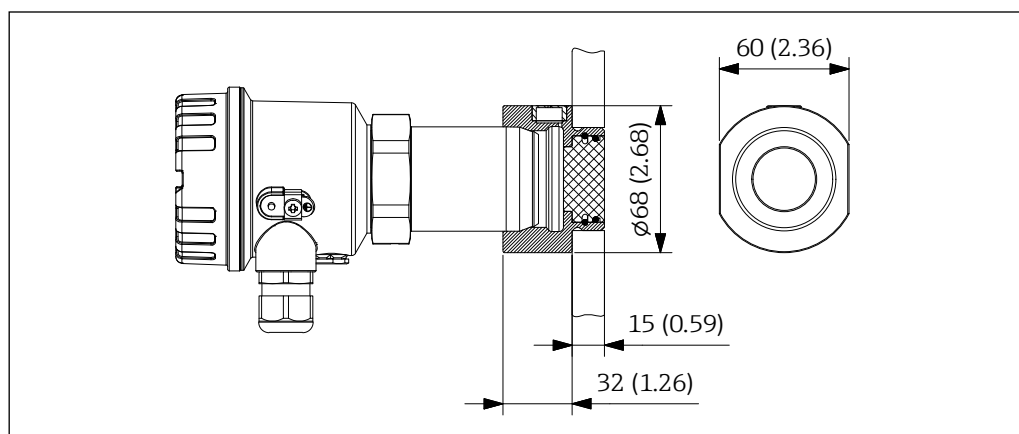


35 Dimensions high pressure adapter. Unit of measurement mm (in)

0000000150

- Process pressure: 0.5 to 21 bar (7 to 305 psi) absolute
- Process temperature: -40 to +70 °C (-40 to +158 °F)
- Material: 316Ti (1.4571), PTFE (window transmission)
- Weight: approx. 0.8 kg (1.76 lb)
- Seal: to be provided by the customer
- Order number:
 - 71381894 (G 1½ (Device connection thread) + Process connection thread), ISO 228-1)
 - 71381898 (G 1½ (Device connection thread) + Process connection thread), ISO 228-1, with inspection certificate EN 10204 - 3.1 material)
 - 71381899 (G 1½ (Process connection thread), ISO 228-1, 1½ NPT (Device connection thread), ANSI/ASME)
 - 71381904 (G 1½ (Process connection thread), ISO 228-1, 1½ NPT (Device connection thread), ANSI/ASME, with inspection certificate EN 10204 - 3.1 material)

Plug

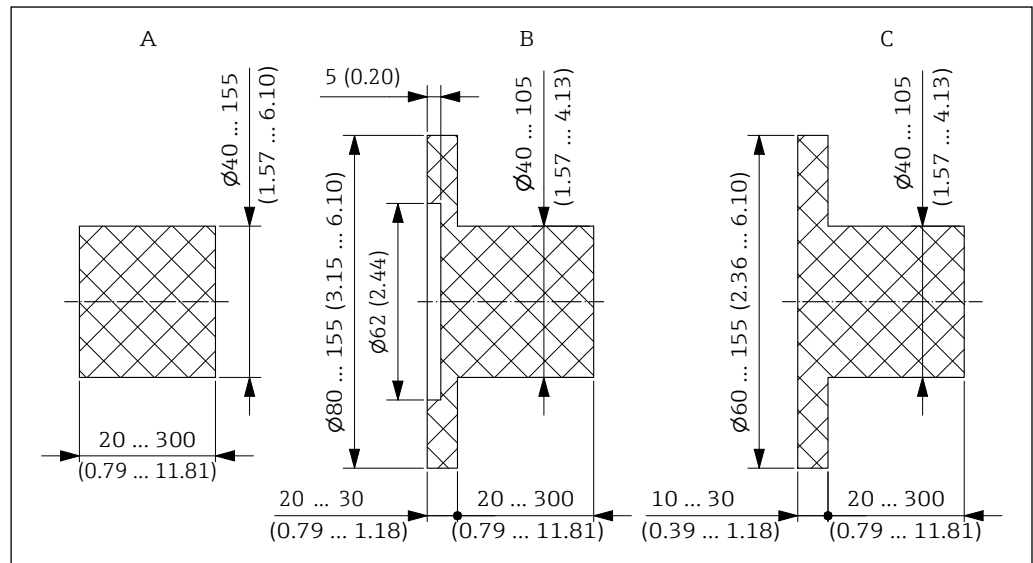


36 Dimensions plug FAR54. Unit of measurement mm (in)

0000000041

- Type FAR54 → TI01371F
- Material: PTFE, aluminum oxide ceramics
- Process temperature: -40 to +800 °C (-40 to +1472 °F)
- Weight: Depending on version (max. 12 kg (26.5 lb))

Sight glass fitting

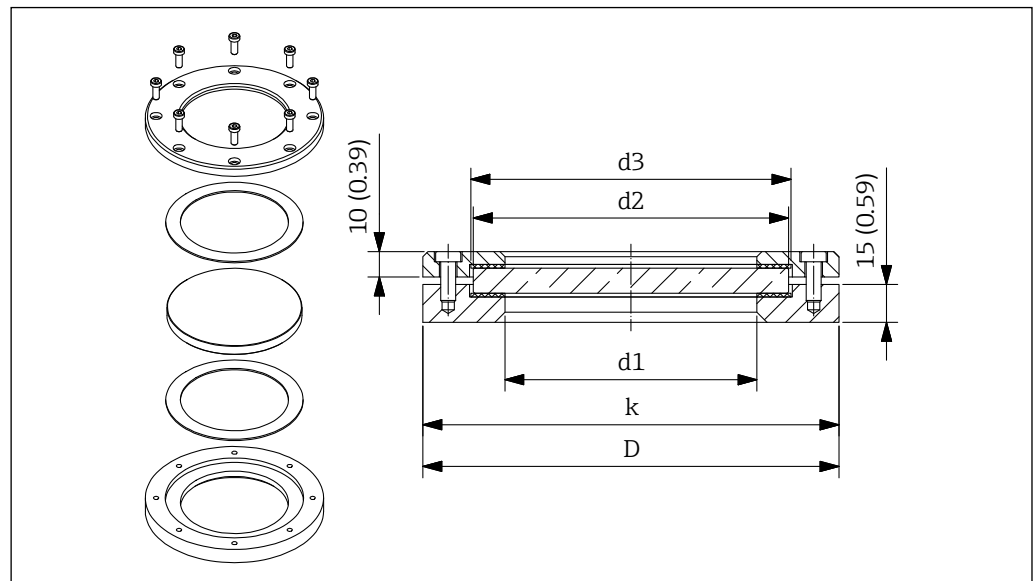


37 Dimensions sight glass fitting for unpressurized processes. Unit of measurement mm (in)

0000000042

DN	d1 mm (in)	d2 mm (in)	d3 mm (in)	D mm (in)	k mm (in)
50	80 (3.15)	100 (3.94)	102 (4.02)	140 (5.51)	120 (4.72)
80	100 (3.94)	125 (4.92)	127 (5.00)	165 (6.50)	145 (5.71)
100	125 (4.92)	150 (5.91)	152 (5.98)	190 (7.48)	170 (6.69)

- Unpressurized, weld-on or weld-in type
- Material: 316Ti (1.4571), seal silicone (max. +200 °C/+392 °F)
- Weight: DN50 approx. 2.4 kg (5.29 lb) to DN100 approx. 4.1 kg (9.04 lb)
- Mounting screws enclosed
- Order number:
 - 71026443 (DN50)
 - 71026444 (DN80)
 - 71026445 (DN100)
- Sight glass disk (spare part)
 - 71209118 (DN50)
 - 71209116 (DN80)
 - 71209115 (DN100)

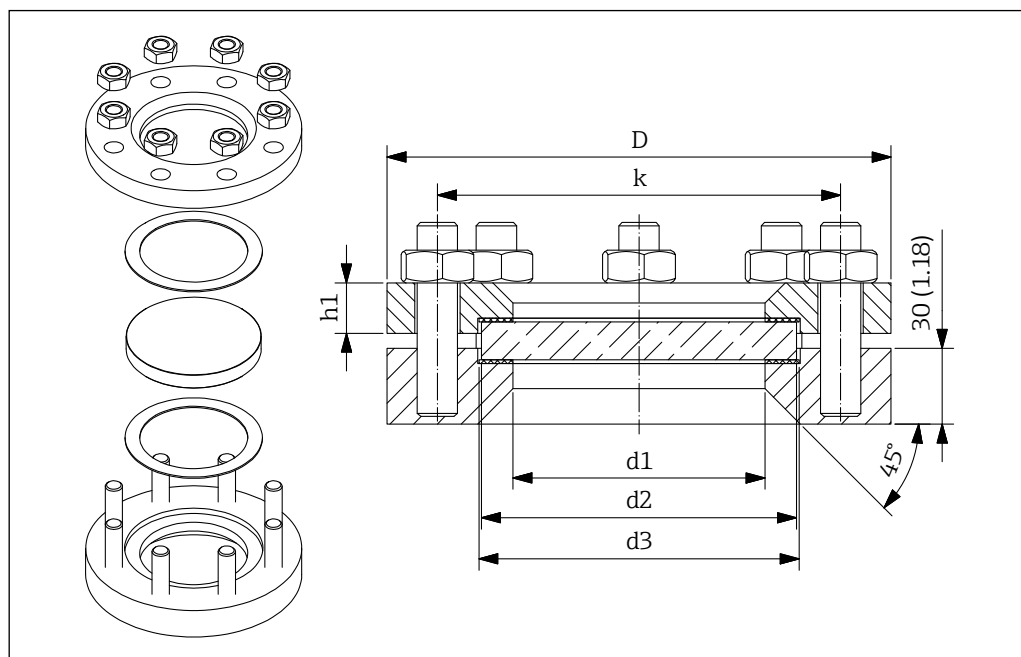


38 Dimensions sight glass fitting for processes up to 10 bar (145 psi) absolute.
Unit of measurement mm (in)

0000000043

DN	d1 mm (in)	d2 mm (in)	d3 mm (in)	D mm (in)	k mm (in)	h1 mm (in)
50	80 (3.15)	100 (3.94)	102 (4.02)	165 (6.50)	125 (4.92)	16 (0.63)
80	100 (3.94)	125 (4.92)	127 (5.00)	200 (7.87)	160 (6.30)	20 (0.79)
100	125 (4.92)	150 (5.91)	152 (5.98)	220 (8.66)	180 (7.09)	22 (0.87)

- Process pressure: Max. 10 bar (145 psi) absolute, weld-on or weld-in type
- Material: 316Ti (1.4571), seal KLINGERSIL® C-4400 (max. +200 °C/+392 °F)
- Weight: DN50 approx. 6.7 kg (14.77 lb) to DN100 approx. 13.0 kg (28.66 lb)
- Mounting screws enclosed
- Order number:
 - 71026446 (DN50)
 - 71026447 (DN80)
 - 71026448 (DN100)
- Sight glass disk (spare part)
 - 71209114 (DN50)
 - 71209111 (DN80)
 - 71209107 (DN100)

Insertion adapter

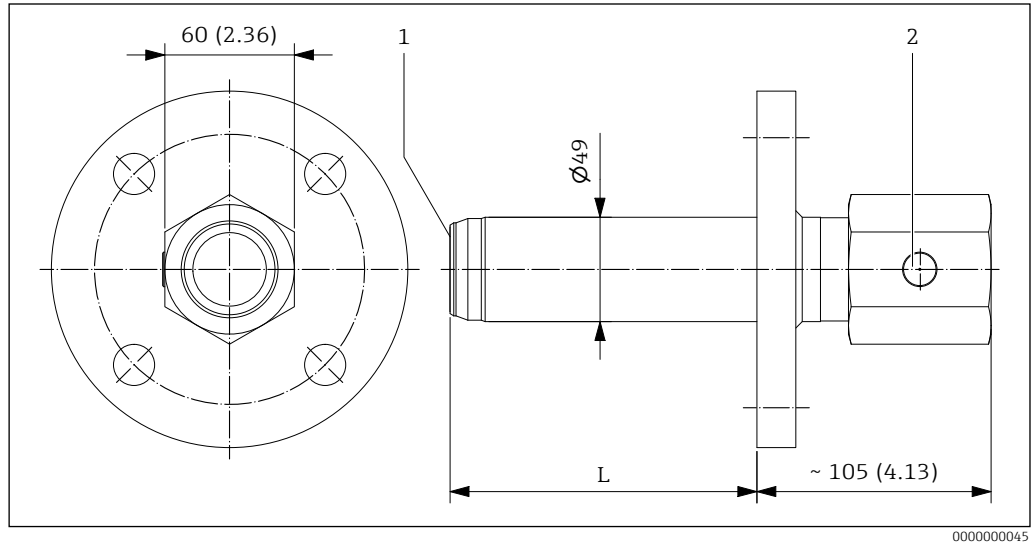


39 Dimensions insertion adapter. Unit of measurement mm (in)

0000000045

- 1 Window with seal, optional
2 Integrated venting element

- Type FAR51 → TI01368F
- Process nozzle
 - DN50 to DN100, PN16, Form A
 - NPS 2" to 4" 150 lbs, RF
- Nozzle length: 100 to 300 mm (3.94 to 11.81 in)
- Connection thread R 1½, 1½ NPT and G 1½
- Optionally with disk made of PTFE or aluminum oxide ceramics
- Process temperature: -40 to +450 °C (-40 to +842 °F)
- Process pressure: 0.8 to 1.1 bar (12 to 16 psi) absolute
- Material: 316Ti (1.4571)
- Weight: 5 to 10 kg (11 to 22 lb)

Weld-in nozzle

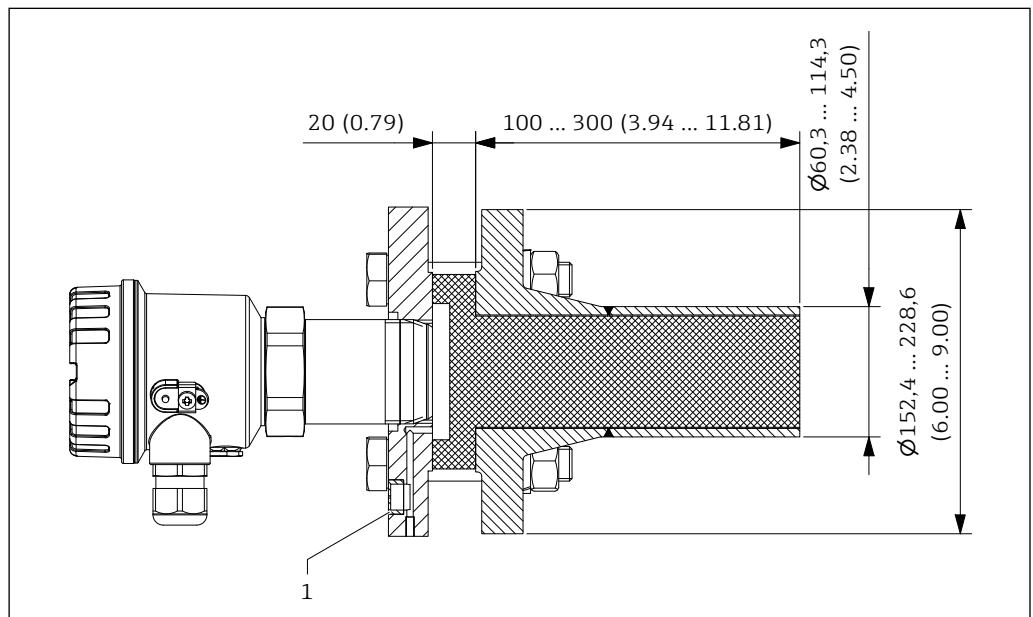


40 Dimensions weld-in nozzle. Unit of measurement mm (in)

0000000289

- 1 Integrated venting element

- Type FAR50 → TI01362F
- Process nozzle:
 - DN50 to DN100, PN16, Form A
 - NPS 2" to 4" 150 lbs, RF
- Nozzle length: 100 to 300 mm (3.94 to 11.81 in)
- Connection thread R 1½, 1½ NPT and G 1½
- Process temperature: -40 to +200 °C (-40 to +392 °F)
- Process pressure: 0.8 to 1.1 bar (12 to 16 psi) absolute
- Material:
 - Nozzle: Stainless steel 316Ti (1.4571) or steel P235GH (1.0345)
 - Counter flange: Stainless steel 316Ti (1.4571) or steel P250GH (1.0460)
 - Plug: PTFE
- Weight: approx. 6 to 7 kg (13 to 15.5 lb)
- Mounting screws enclosed

Spacer tube (wave guide)

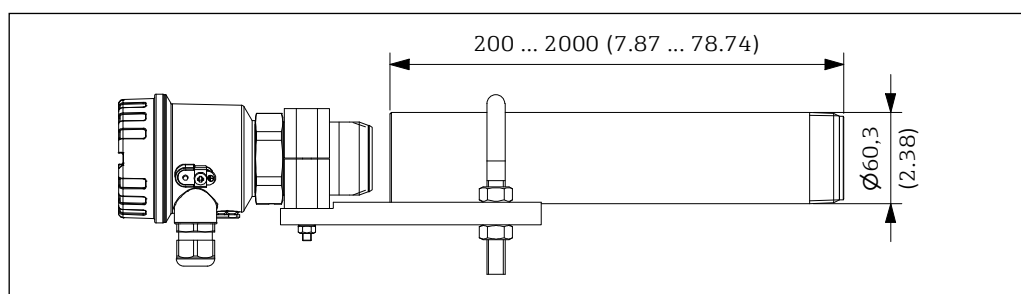


41 Dimensions spacer tube. Unit of measurement mm (in)

0000000200

- Type FAR53 → TI01370F
- Process connection: With or without thread R 2, 2 NPT and G 2
- With optional aluminum oxide ceramic disk
- Process temperature: -40 to +450 °C (-40 to +842 °F)
- Process pressure: 0.8 to 1.1 bar (12 to 16 psi) absolute
- Material: Stainless steel 316Ti (1.4571) or steel P235GH (1.0345)
- Weight: 200 mm approx. 5.3 kg (11.7 lbs) to 2000 mm approx. 22.2 kg (48.9 lbs)

Wave guide

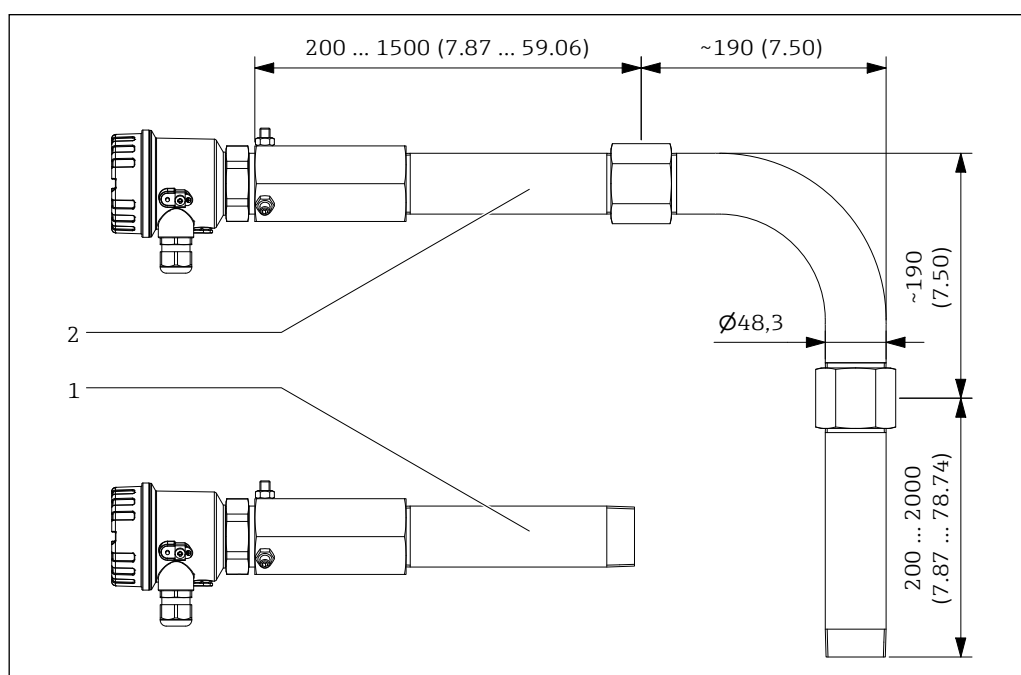


42 Dimensions wave guide. Unit of measurement mm (in)

0000000290

- 1 Straight version
- 2 Angulated version

- Type FAR55 →  TI01372F
- Process connection: With or without thread R 1½ and 1½ NPT
- Lengths: L1 = 200 to 1500 mm (7.87 to 59.06 in), L2 = 200 to 2000 mm (7.87 to 78.74 in)
- Device connection: Receptacle, suitable for thread R 1½, 1½ NPT and G 1½
- Material: Stainless steel 316Ti (1.4571)
- Weight: FAR55-AAAACGAA2* approx. 2.0 kg (4.41 lbs) to FAR55-BAAADGDL2* approx. 17.8 kg (39.24 lbs)

High temperature adapter with extension

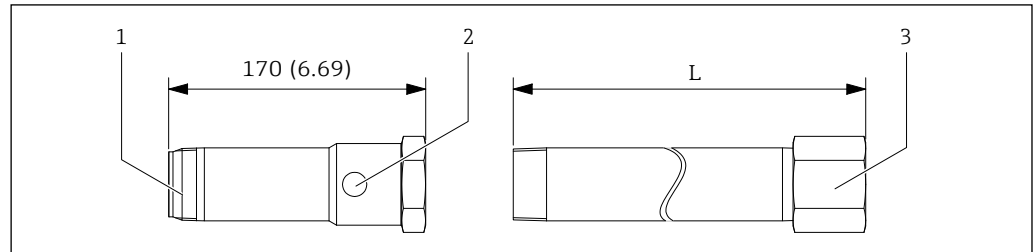

 43 Dimensions high temperature adapter with extension. Unit of measurement mm (in)

0000000286

- 1 High temperature adapter
 2 Integrated venting element
 3 Extension for high temperature adapter


High temperature adapter

- Process temperature: -20 to +450 °C (-4 to +842 °F)
- Process pressure: 0.8 to 5.1 bar (12 to 74 psi) absolute
- SW55
- Material: 316Ti (1.4571), aluminum oxide ceramics (front-flush disk)
- Weight: approx. 1.4 kg (3.09 lb)
- Seal: to be provided by the customer
- Order number:
 - 71113441 (R 1½ (connection thread), G 1½ (internal thread))
 - 71478114 ((R 1½ (connection thread), G 1½ (internal thread), with inspection certificate EN 10204 - 3.1 material)
 - 71113449 (1½ NPT (internal and external thread))
 - 71478115 (1½ NPT (internal and external thread), with inspection certificate EN 10204 - 3.1 material)

Extension

- Extension for high temperature adapter, SW55
- Material: 316Ti (1.4571)
- Weight: 225 mm (8.86 in) approx. 1.1 kg (2.43 lb) to 525 mm (20.67 in) approx. 2.2 kg (4.85 lb)
- Seal: to be provided by the customer
- Order number:
 - 71113450 (R 1½ (connection thread), G 1½ (internal thread), L = 225 mm (8.86 in))
 - 71113451 (R 1½ (connection thread), G 1½ (internal thread), L = 325 mm (12.80 in))
 - 71113452 (R 1½ (connection thread), G 1½ (internal thread), L = 525 mm (20.67 in))
 - 71113453 (1½ NPT (internal and external thread), L = 225 mm (8.86 in))
 - 71113454 (1½ NPT (internal and external thread), L = 325 mm (12.80 in))
 - 71113455 (1½ NPT (internal and external thread), L = 525 mm (20.67 in))

Weather protection cover

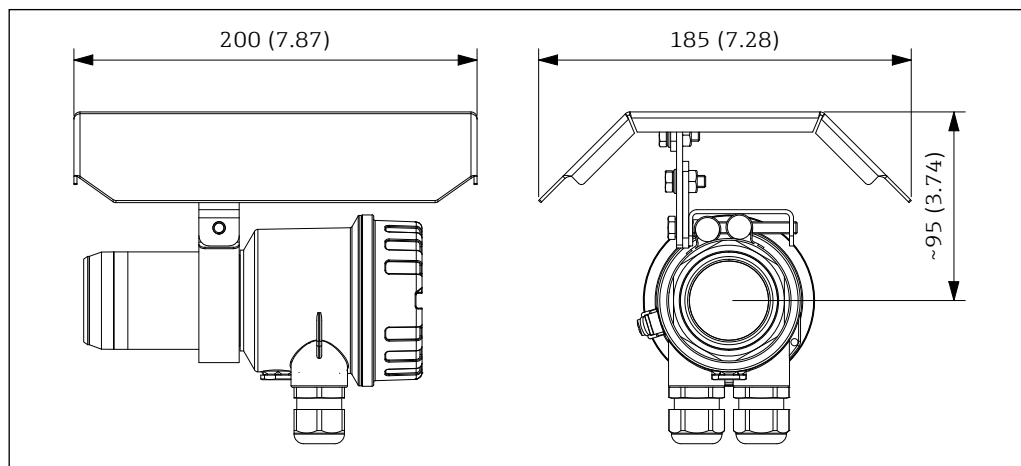

44 Dimensions weather protective cover. Unit of measurement mm (in)

0000000285

- For outdoor installation in strong sunlight, the following weather protection cover can be used.
- Material: Stainless steel 316L (1.4404)
- Weight: Approx. 0.8 kg (1.76 lb)
- Mounting screws enclosed
- Order number: 71454446

Supplementary documentation



The certificates and approvals currently available can be accessed via the

- Product Configurator
- Endress+Hauser website: www.endress.com → Downloads.

Standard documentation

Document type: Operating Instructions (BA)

Installation and initial commissioning – contains all functions in the operating menu that are required for a typical measuring task. Functions beyond this scope are not included.
BA01136F

Document type: Brief Operating Instructions (KA)

Quick guide to the first measured value – includes all essential information from the incoming acceptance to the electrical connection.
KA01725F

Document type: Safety Instructions, certificates

Depending on the approval, Safety Instructions are also supplied with the device, e. g. XA. This documentation is an integral part of the Operating Instructions.
The nameplate indicates the Safety Instructions (XA) that are relevant to the device.



info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

Endress+Hauser 
People for Process Automation