





SP 1A

Submersible pumps, motors and accessories
50 Hz

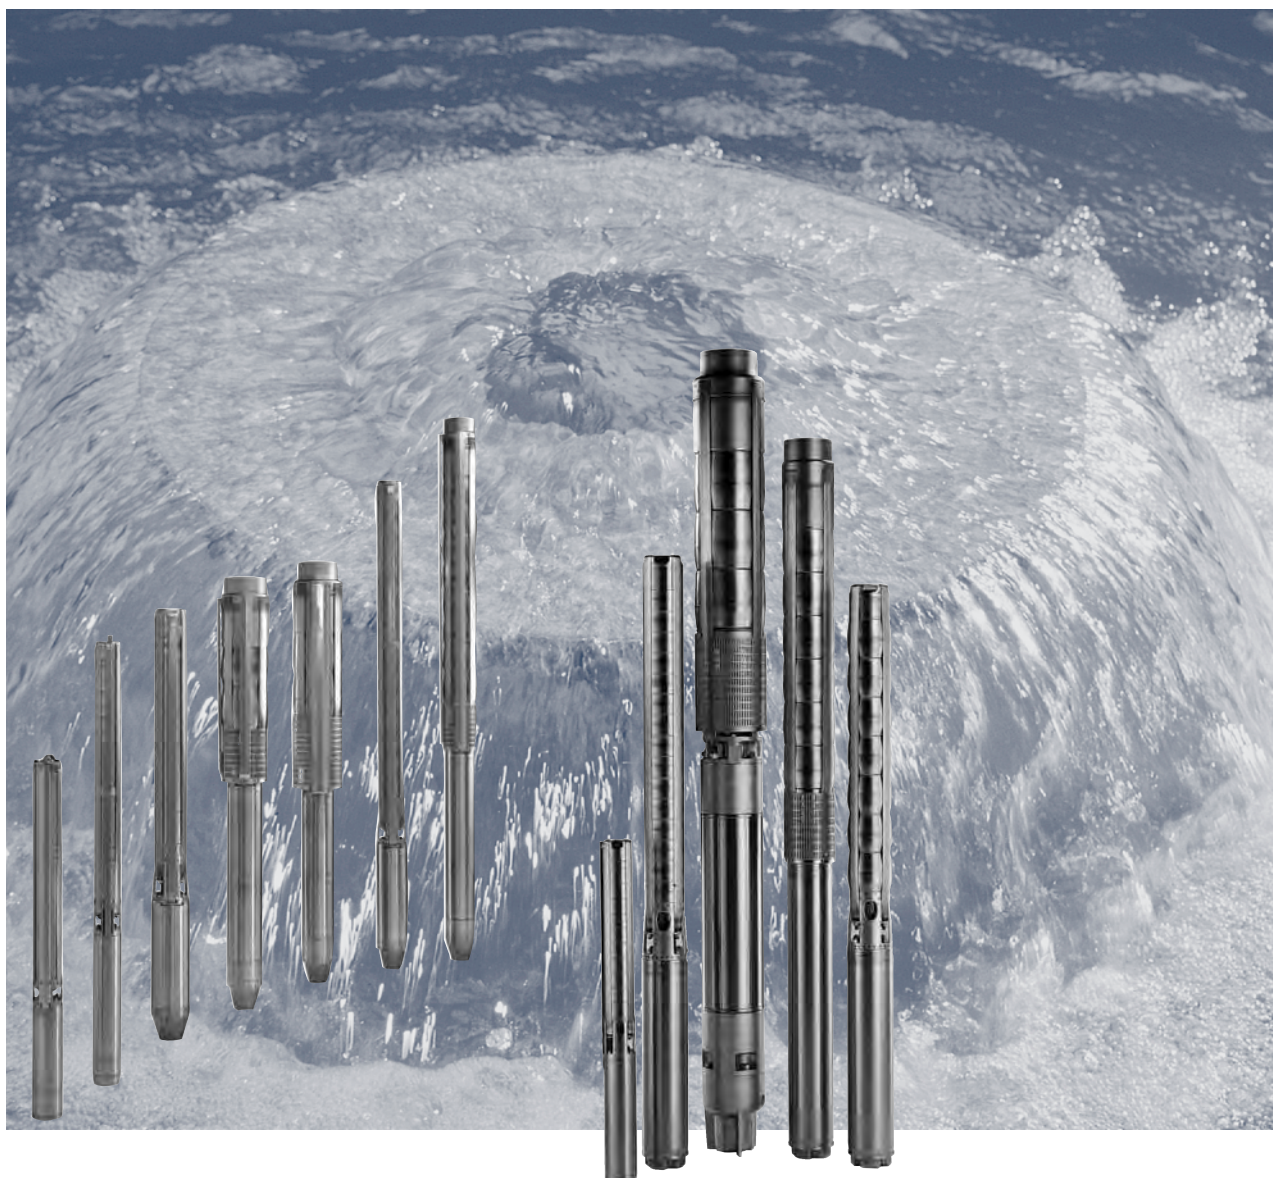


SP 1A

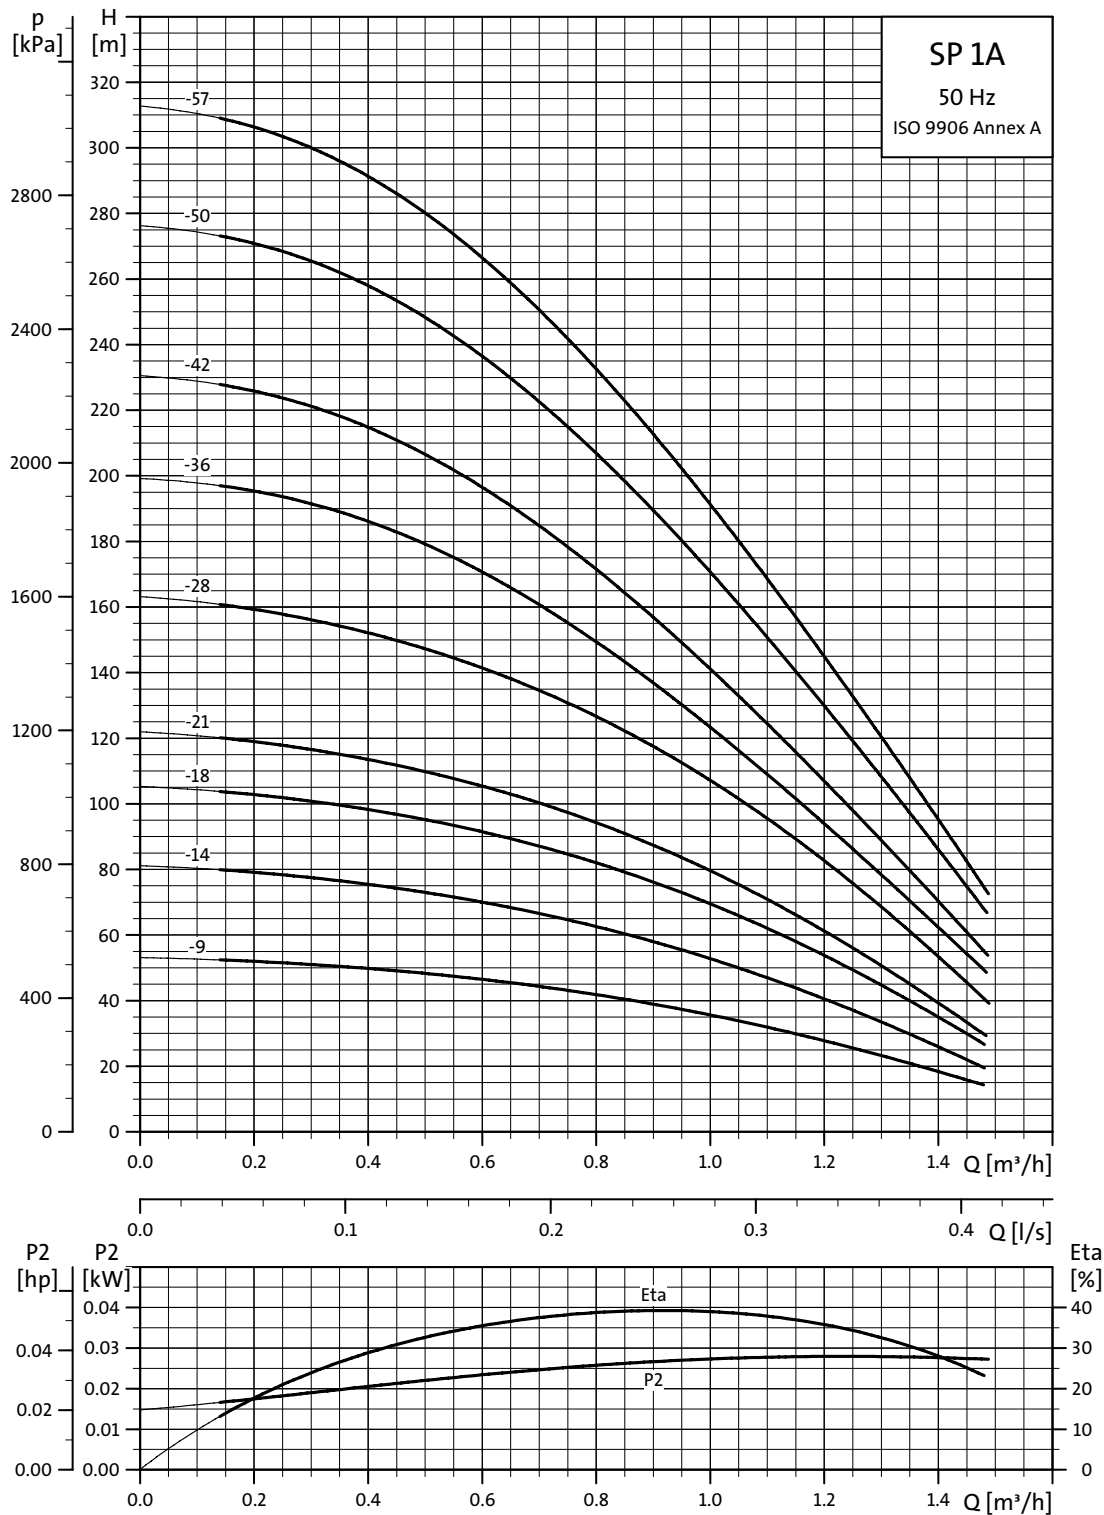

TM00 7271 4702

Explanation of efficiency curve, please see "Curve conditions" on page 4.

Dimensions and weights

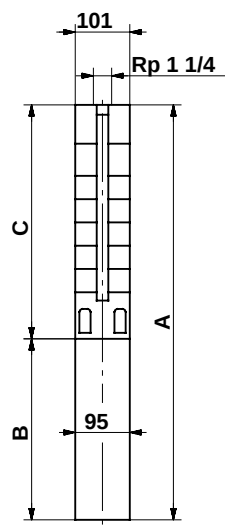

101 mm = Maximum diameter of pump inclusive of cable guard and motor.

Pump type	Motor		Dimensions [mm]				Net weight [kg]		
	Type	Power [kW]	C	B		A			
				1x230V	3x230V 3x400V	1x230V	3x230V 3x400V	1x230V	3x230V 3x400V
SP 1A-9	MS 402	0.37	344	256	226	600	570	11	9
SP 1A-14	MS 402	0.37	449	256	226	705	675	12	10
SP 1A-18	MS 402	0.55	533	291	241	824	774	14	12
SP 1A-21	MS 402	0.55	596	291	241	887	837	14	12
SP 1A-28	MS 402	0.75	743	306	276	1049	1019	16	15
SP 1A-36	MS 402	1.1	956	346	306	1302	1262	25	23
SP 1A-42	MS 402	1.1	1082	346	306	1428	1388	27	25
SP 1A-50	MS 402	1.5	1250	346	346	1596	1596	30	29
SP 1A-57	MS 402	1.5	1397	346	346	1743	1743	32	32



V7023747 0907	GB
Repl. V7023747 1006	

Subject to alterations.