


Testomat 2000® DUO CN

LENNTECH

info@lennotech.com Tel. +31-152-610-900

www.lennotech.com Fax. +31-152-616-289

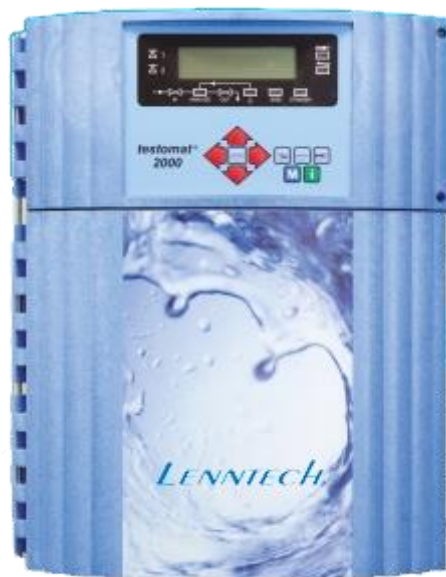

The **Testomat2000® CN DUO** is, just like the **Testomat 2000® CN**, an ideal instrument for monitoring the water quality of water treatment, water blending and drinking-water plant. The operating menu is in mandarin or english.

Application

- use in two circuits with different hardnesses
- measurement of inlet and outlet hardness

Measuring range

0.05-25 °dH Water hardness

0.5-20 °dH Carbonate hardness

1-15 mmol/l p-value

0.05-0.5 mmol/l minus m-value

(depending on the choice of the indicator)

Technical Data

Power supply: 230–240 VAC, 115 VAC, 24 VAC all 50–60Hz

Power consumption: max. 30 VA

Protection class: I

Degree of protection: IP 65

Ambient temperature: 10–45 °C, 50 - 104°F

Option: booster pump see accessories

Dimensions (B x H x T): 380 x 480 x 280 mm

Weight: approx. 9.5 kg

Menu languages: Mandarin, English

Mains water supply

Operating pressure:

1 to 8 bar (15 to 116 psi) or

0,3 to 1 bar (5 to 15 psi), after removing of the valve body out of the regulator/filter housing

Water inlet: Opaque hose with 6 mm external diameter/4 mm internal diameter

Water outlet: Hose with 6 mm external diameter/4 mm internal diameter

Water temperature: 10 to 40 °C; 50 to 104°F