

MODEL SU-820

Membrane Type	Cross Linked Fully Aromatic Polyamide Composite
Element Configuration	Spiral Wound

Performance Specification

	Sea Water
Salt Rejection ^{1,2}	99.75 % ³
Product Flow Rate ^{1,2}	16.00 m³/day (4'230 gpd) ⁴

Notes:

¹ Test Conditions

Pressure	56 kg/cm ²	(800 psi)
Temperature	25 °C	(77 °F)
Feed Concentration	35'000 ppm	Sea Water
Brine Flow Rate	80 l/min	(21 gpm)
Feed pH	6.5	


² Average value for 100 elements after 1 hour operation

³ 99.4% minimum *

⁴ 14.0 m³/day (3'700 gpd) minimum *

* For any single element

Dimensions:

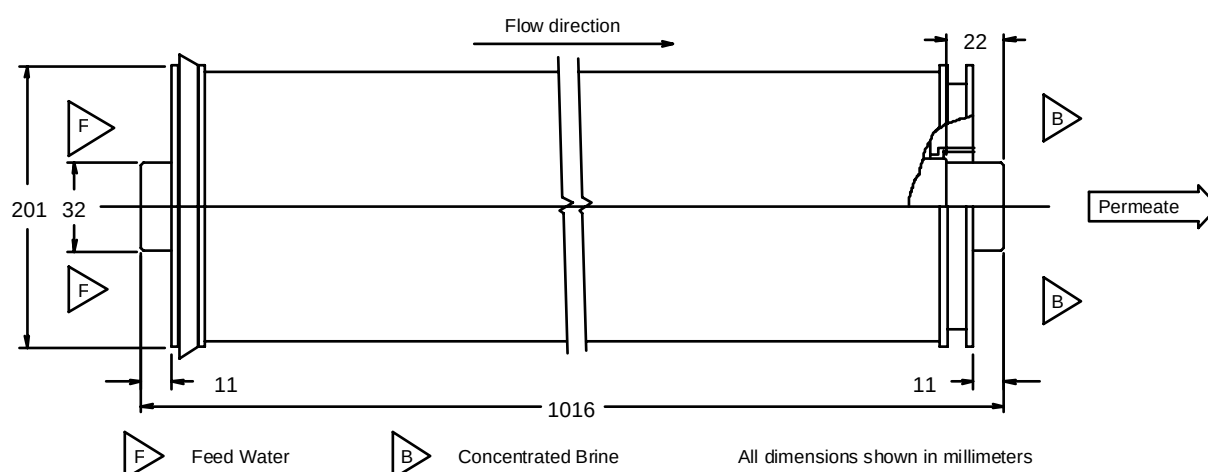

Design Conditions

Recommended ¹

Operating Pressure ^{2,3}	< 70 kg/cm² (1000 psi)
Feedwater Temperature ⁴	< 35 °C (95 °F)
Feedwater Turbidity (SDI ₁₅) ^{2,5}	< 4
Feedwater Chlorine Concentration	0 ppm
pH Range, Continuous Operation ⁶	3 - 9
pH Range, Chemical Cleaning ⁷	2 - 10
Feed Flow Rate per Vessel	< 200 l/min (52.8 gpm)
Brine Flow Rate per Vessel ⁸	> 40 l/min (10.6 gpm)
Brine/Permeate Flow Ratio ^{8,9}	> 6
Pressure Drop (per Element) ⁹	< 1 kg/cm² (14 psi)
Pressure Drop (per Vessel) ⁹	< 2 kg/cm² (29 psi)

Notes:

- ¹ The recommended design range means safe operational and design conditions under not so much fouling and scaling. If the SU-series elements are operated outside of the recommended design range, the effective membrane life may be reduced. Refer to the Toray Technical Bulletin, or contact Toray or the local distributor for design guidelines and further information for multi element design.
- ² High flux operation (operation under high permeate flow rate per single element) on feedwater turbidity greater than 3 or 4 SDI ₁₅ generally results in frequent cleaning requirements. Operating pressure should be selected to maintain the flux rate, or permeate flow rate per single element.
- ³ Maximum 70 kg/cm² (1000 psi)
- ⁴ Maximum 45 °C (113 °F)
- ⁵ SDI ₁₅ = Silt Density Index measured according to ASTM D4189
- ⁶ Both feed and brine water must meet this range.
- ⁷ Cleaning and sterilization must meet the recommendations in the Technical Bulletins for SU-series elements.
- ⁸ Flow ratio of brine to permeate for each single element
- ⁹ This figure may be reduced when there is hardly any fouling and scaling
- ¹⁰ Element(s) must be cleaned when pressure drop increases to 1.5 times of the initial value.

ROPUR AG continuously improves its products and reserves the right to change above specifications without prior notice. Our general terms of sales and warranty make integral part of these informations and cannot be disclaimed.

LENNTECH

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289