

AMBERLYST™ 35WET Industrial Grade Strongly Acidic Catalyst

Description

AMBERLYST 35WET is a macroreticular, strongly acidic, cationic, polymeric catalyst. Its open continuous pore structure makes it an excellent heterogeneous catalyst for a wide variety of organic reactions. This catalyst possesses a novel acid functionality which gives it higher thermal stability than standard polymeric catalysts. Its polymeric structure is resistant to oxidants and breakdown caused by mechanical and osmotic shock.

AMBERLYST 35WET is a superior next-generation catalyst for the production of MTBE and TAME. It significantly outperforms conventional catalysts. Amberlyst 35WET has increased activity which means throughput can be increased by 20 to 40% while maintaining high olefin conversion. Selectivity to MTBE or TAME remains high.

Another important feature of AMBERLYST 35WET is that it increases the equilibrium constant of isobutylene and methanol to MTBE compared to conventional catalysts. This feature can lead to significant increases in MTBE productivity. Longer catalyst lifetimes may result from the increased concentration of acid sites and enhanced thermal stability.

Typical Properties

These properties are typical but do not constitute specifications.

Physical form	Opaque beads
Ionic form as shipped	Hydrogen (98 % min.)
Concentration of acid sites ^[1]	≥ 1.9 eq/L ≥ 5.2 eq/kg
Moisture holding capacity ^[1]	51 to 57% (H ⁺ form)
Shipping weight	800 g/L (50 lbs/ft ³)
Particle size	
Harmonic mean size	0.700 - 0.950 mm
Uniformity coefficient	≤ 1.7
Fines content ^[1]	< 0.425 mm: 1.0% max
Coarse beads	> 1.180 mm: 9.0% max
Nitrogen BET	
Surface area	50 m ² /g
Average pore diameter	300 Å
Total pore volume	0.35 ml/g
Shrinkage	Water to methanol: 4.5%
	Water to MTBE: 10.5%
	Water to hexane: 21%
	Water to dry: 40%

^[1] Contractual value

Test methods are available on request.

Suggested Operating Conditions

Maximum operating temperature	150°C (300°F)
Minimum bed depth	1000 mm (39 inches)
Operating flow rate	1 to 5 BV*/h (LHSV)
Pressure drop limitation	1 bar (15 psig) across the bed

* 1 BV = 1 m³ solution per m³ of resin

Hydraulic Characteristics

Figure 1 shows the bed expansion of AMBERLYST 35WET as a function of backwash flow rate and water temperature.


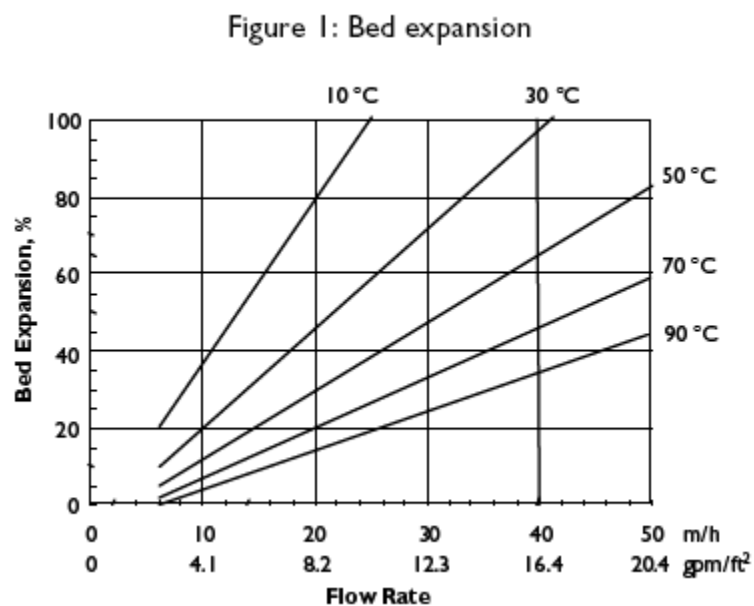


Figure 2 shows the pressure drop data for AMBERLYST 35WET as a function of service flow rate and water temperature.

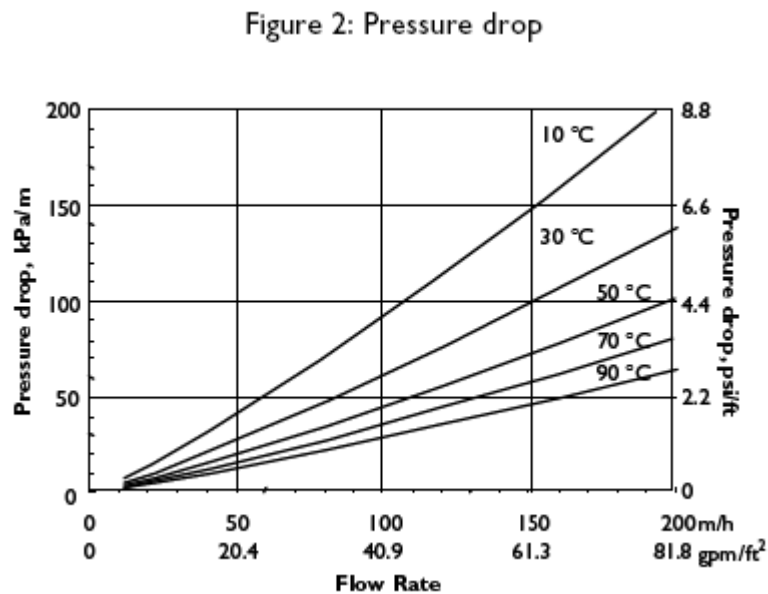

All our products are produced in ISO 9002 certified manufacturing facilities.

AMBERLYST is a trademark of Rohm and Haas Company, Philadelphia, U.S.A.

Ion exchange resins and polymeric adsorbents, as produced, contain by-products resulting from the manufacturing process. The user must determine the extent to which organic by-products must be removed for any particular use and establish techniques to assure that the appropriate level of purity is achieved for that use. The user must ensure compliance with all prudent safety standards and regulatory requirements governing the application. Except where specifically otherwise stated, Rohm and Haas Company does not recommend its ion exchange resins or polymeric adsorbents, as supplied, as being suitable or appropriately pure for any particular use. Consult your Rohm and Haas technical representative for further information. Acidic and basic regenerant solutions are corrosive and should be handled in a manner that will prevent eye and skin contact. Nitric acid and other strong oxidising agents can cause explosive type reactions when mixed with ion exchange resins. Proper design of process equipment to prevent rapid buildup of pressure is necessary if use of an oxidising agent such as nitric acid is contemplated. Before using strong oxidising agents in contact with ion exchange resins, consult sources knowledgeable in the handling of these materials.

Rohm and Haas Company makes no warranties either expressed or implied as to the accuracy of appropriateness of this data and expressly excludes any liability upon Rohm and Haas arising out of its use. We recommend that the prospective users determine for themselves the suitability of Rohm and Haas materials and suggestions for any use prior to their adoption. Suggestions for uses of our products of the inclusion of descriptive material from patents and the citation of specific patents in this publication should not be understood as recommending the use of our products in violation of any patent or as permission or license to use any patents of the Rohm and Haas Company. Material Safety Data Sheets outlining the hazards and handling methods for our products are available on request.



©Rohm and Haas, 2006 All rights reserved.

November 2003

LENNTECH

info@lennotech.com Tel. +31-152-610-900

www.lennotech.com Fax. +31-152-616-289