




CR-20, CRI-20, CRN-20, CRE-20, CRIE-20, CRNE

Bombas centrífugas multicelulares verticales
50 Hz




Intervalo de rendimiento de CR, CRI, CRN

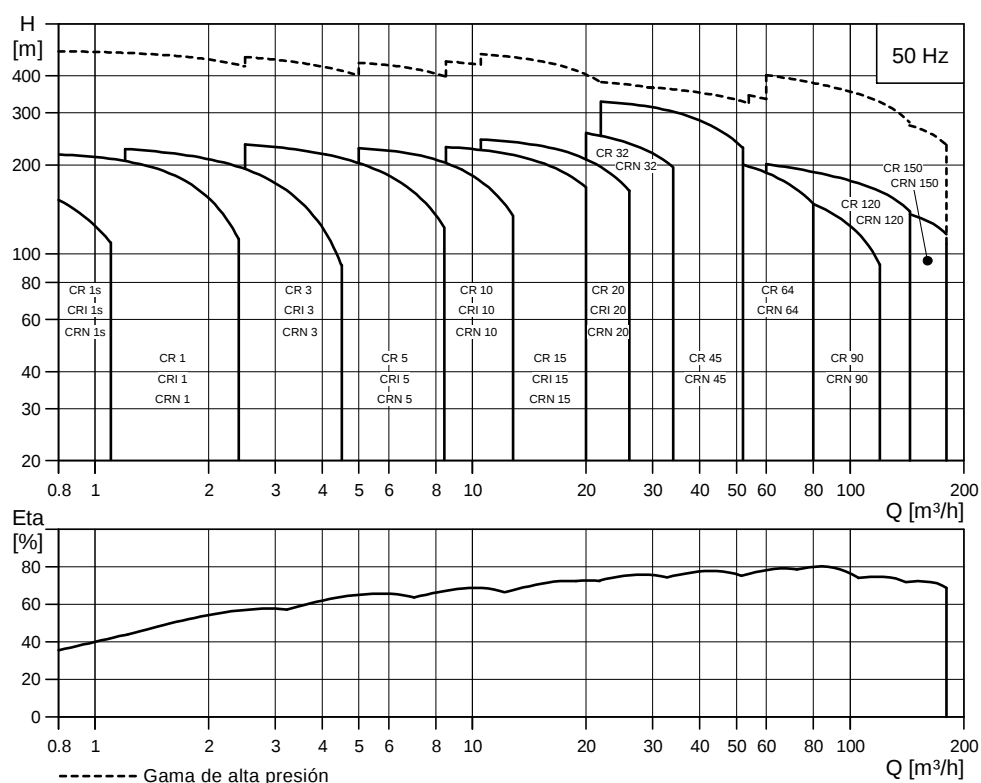


TM02 1192 4708

Intervalo de rendimiento de CRE, CRIE, CRNE

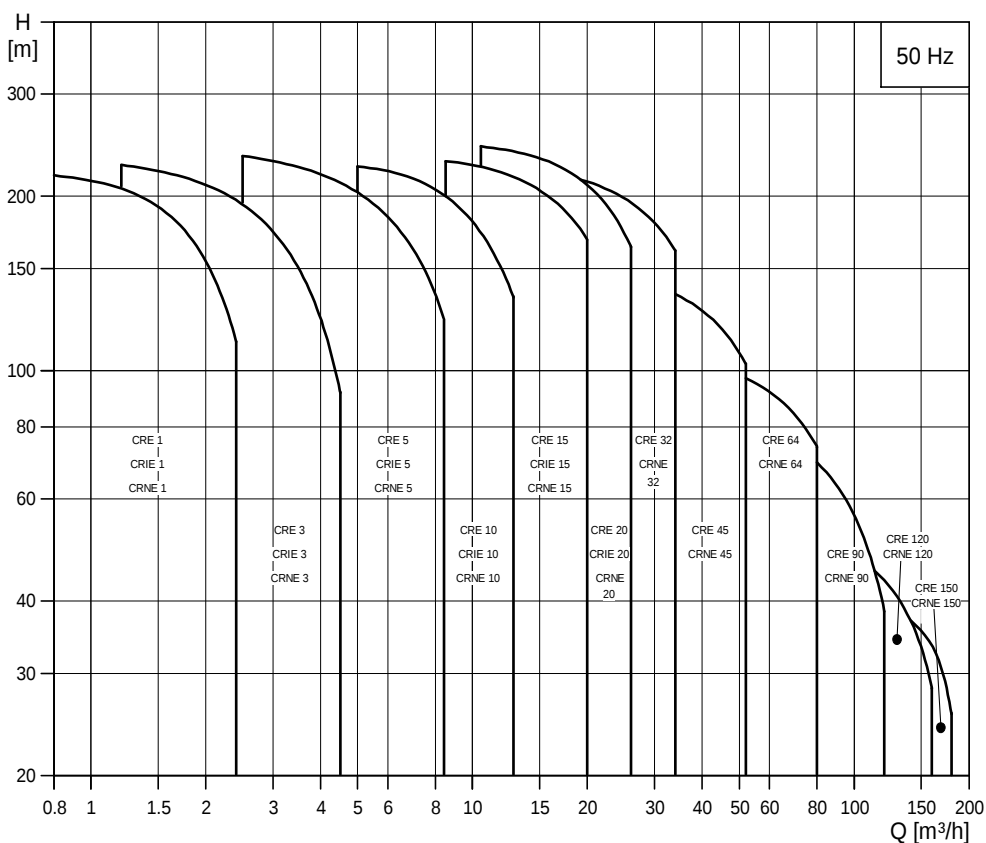


TM02 7281 4708

CR, CRE 20

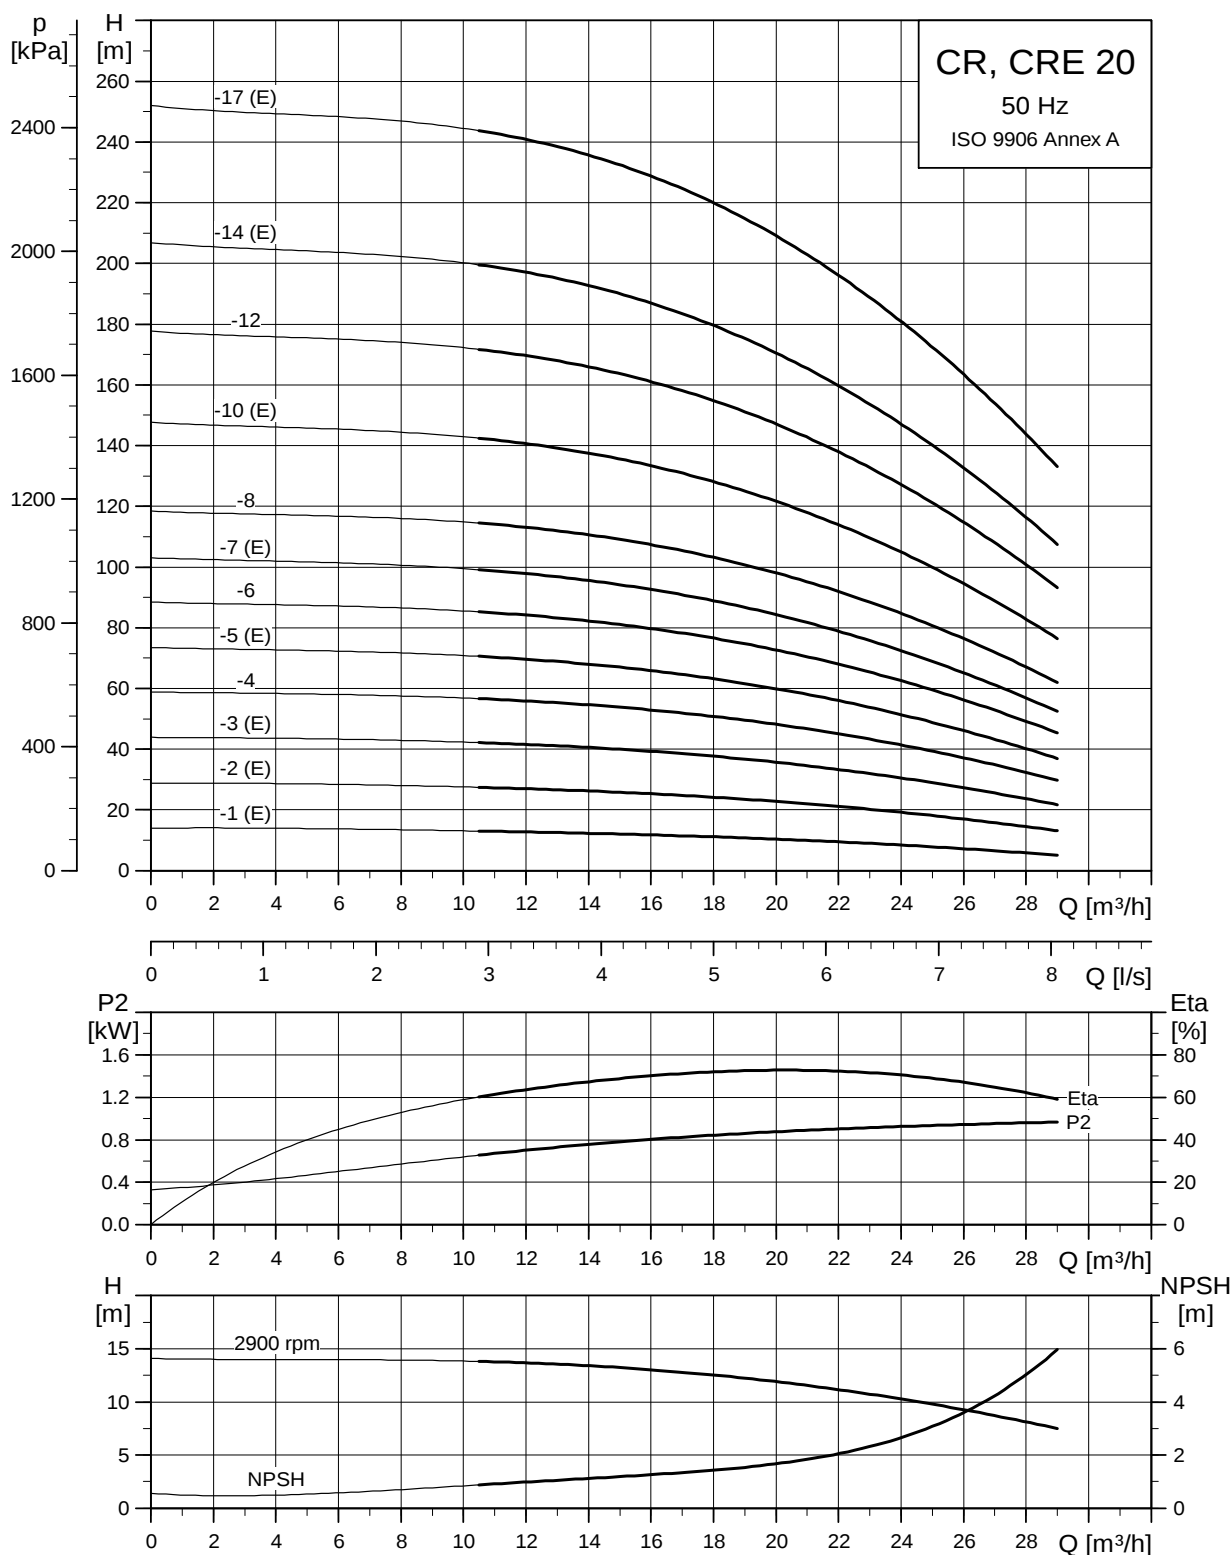

TM02 7300 3605

Plano dimensional

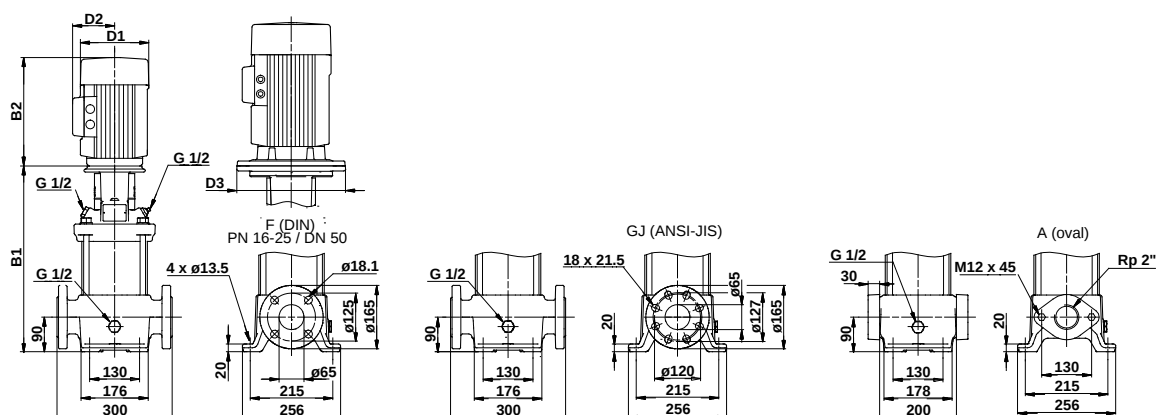


TM03 1727 2805

Dimensiones y pesos

Tipo de bomba	Motor P ₂ [kW]	CR										CRE									
		Dimensiones [mm]								Peso neto [kg]		Dimensiones [mm]								Peso neto [kg]	
		Brida ovalada		Brida DIN		D1	D2	D3	Brida ovalada	Brida DIN	Brida ovalada		Brida DIN		D1	D2	D3	Brida ovalada	Brida DIN		
		B1	B1+B2	B1	B1+B2						B1	B1+B2	B1	B1+B2							
CR(E) 20-1	1,1	400	631	400	631	141	109	-	41	42	400	631	400	631	178	167	-	44	45		
CR(E) 20-2	2,2	415	736	415	736	178	110	-	49	50	415	736	415	736	178	167	-	59	60		
CR(E) 20-3	4	465	837	465	837	220	134	-	65	66	465	837	465	837	220	188	-	75	76		
CR 20-4	5,5	542	933	542	933	220	134	300	87	88	-	-	-	-	-	-	-	-	-		
CR(E) 20-5	5,5	587	978	587	978	220	134	300	89	90	587	978	587	978	220	188	300	95	96		
CR 20-6	7,5	632	1011	632	1011	260	159	300	92	93	-	-	-	-	-	-	-	-	-		
CR(E) 20-7	7,5	677	1056	677	1056	260	159	300	94	95	677	1056	677	1056	260	213	300	102	103		
CR 20-8	11	-	-	799	1270	314	204	350	-	147	-	-	-	-	-	-	-	-	-		
CR(E) 20-10	11	-	-	889	1360	314	204	350	-	150	-	-	904	1375	314	308	350	-	195		
CR 20-12	15	-	-	979	1450	314	204	350	-	166	-	-	-	-	-	-	-	-	-		
CR(E) 20-14	15	-	-	1069	1540	314	204	350	-	170	-	-	1084	1555	314	308	350	-	217		
CR(E) 20-17	18,5	-	-	1204	1719	314	204	350	-	188	-	-	1219	1734	314	308	350	-	234		

CRI, CRN, CRIE, CRNE 20

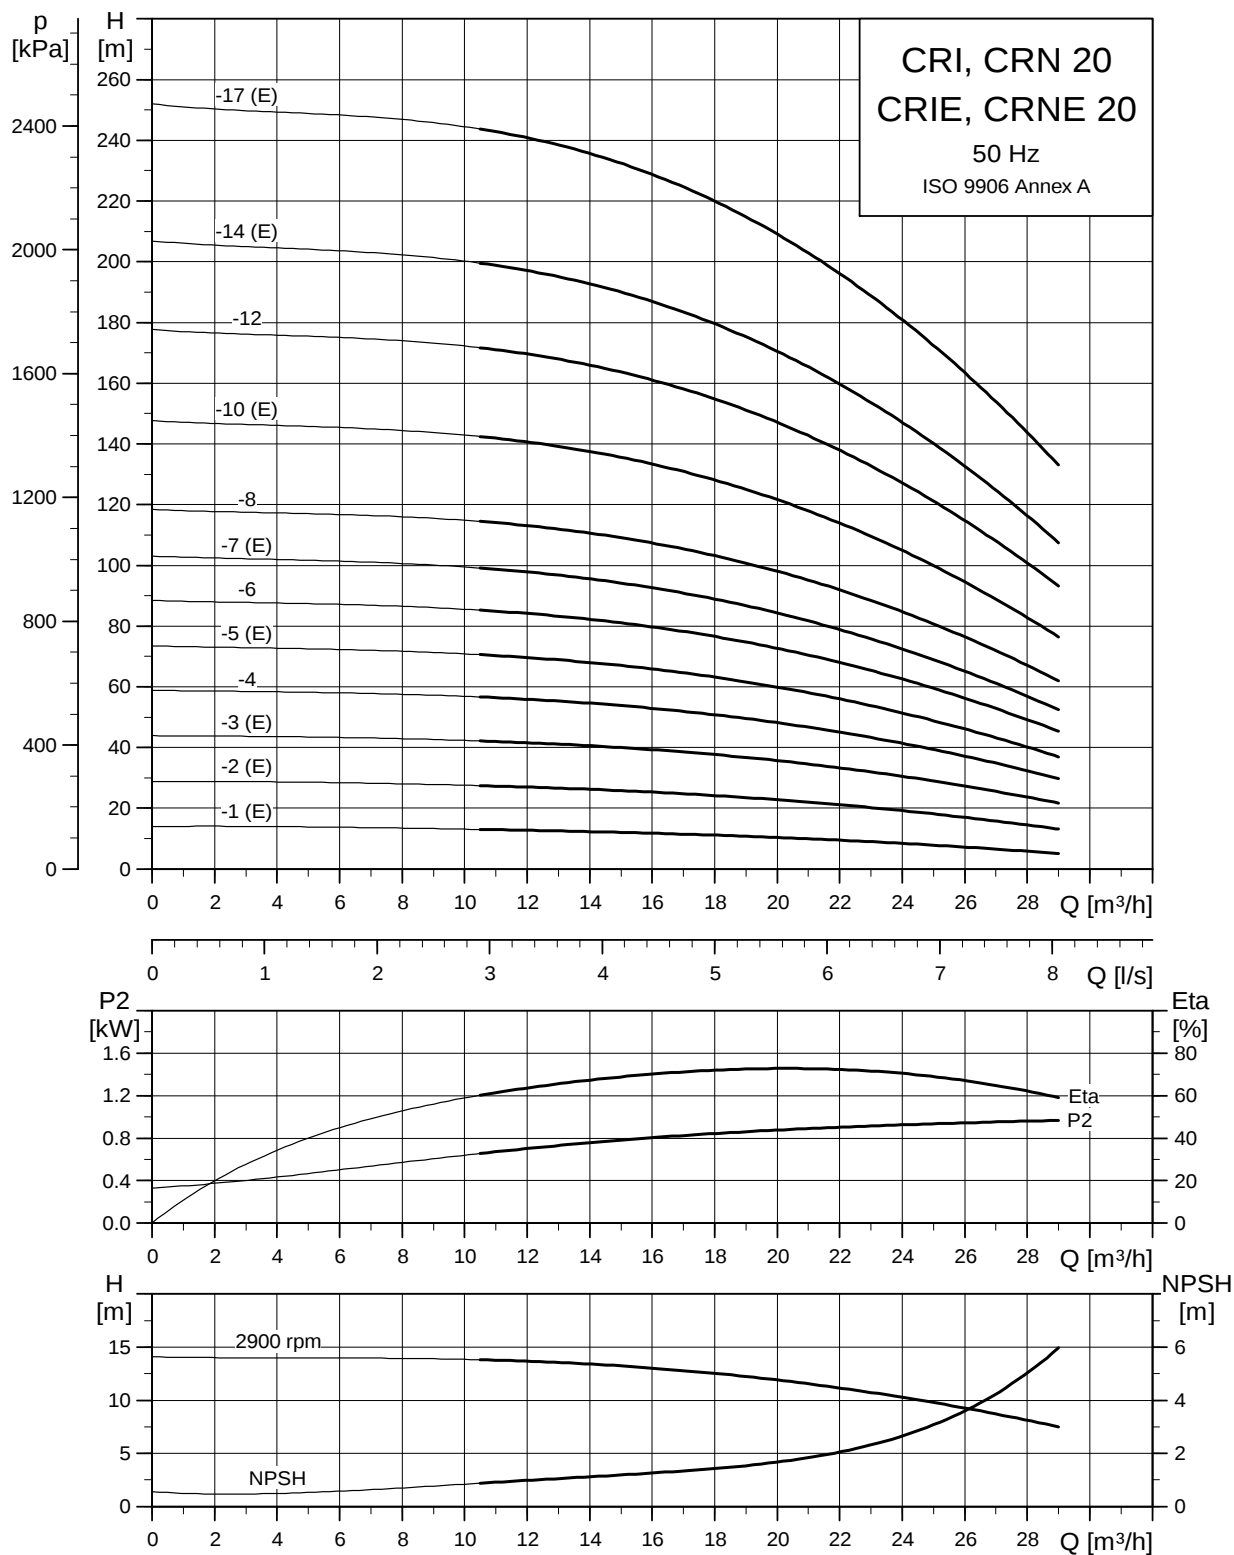

TM02 7301 3605

96499064 0610	E
Repl. 96499064 0309	

The name Grundfos, the Grundfos logo, and the payoff Be-Think-Innovate are registered trademarks owned by Grundfos Management A/S or Grundfos A/S, Denmark. All rights reserved worldwide.