

LENNTECH MO6500 4" REVERSE OSMOSIS SYSTEM FOR BRACKISH WATER

APPLICATIONS

Process water, rinse water, steam boilers, heating and cooling circuits, agriculture, desalination, food and beverage, utility water treatment.

EQUIPMENT

- Grundfos® CRN 1-36 high pressure pump
- 450 psi membrane vessel
- Ecosoft controller OC6000
- Purified water conductivity probe
- Electrical inlet valve
- Regulating needle valves
- AISI 304 Stainless steel frame
- AISI 316 Stainless steel piping
- Wooden crate

OPTION

- High rejection Filmtec™ membrane

CONNECTION PORT SIZES

Influent water	G 1/2"
Permeate	G 1/2"
Concentrate	G 1/2"
Antiscalant dosing port	G 1/2"

Approximate weight

Bare system	100 kg
Crated system	130 kg

Dimensions (Width × Depth × Height)

Dimensions may vary ± 5%

Bare system	0.63 × 0.35 × 1.71 m
Crated system	0.76 × 0.49 × 1.92 m



LennTech reserves the right to amend the product's system architecture provided that its functionality and usability will not deteriorate

LENNTECH MO6500 4" REVERSE OSMOSIS SYSTEM FOR BRACKISH WATER

Code	Product	Flow capacity, L/h (GPH)	Membranes
MO6500BI6	MO6500 BWRO System	200–300 (50–75)	1/40 x 40

* List prices are without VAT


TECHNICAL SPECIFICATION

Permeate capacity ¹	250 L/h
Permeate recovery ²	depends on feed water TDS
Maximum TDS	10 000 mg/L (10 g/L)
Influent flow demand	400...800 L/h (service) 2000...3000 L/h (rinse)
Operating pressure	15...20 bar
Maximum pressure	25 bar
Electrical requirements	230 V, 50 Hz (1 ph)
Electrical power	2.2 kW

¹ depends on feed water TDS, temperature, and permeate recovery — see graph on the right

² for low scaling/fouling water

MO6500 INOX RO FLOW CAPACITY GRAPH (WITH LCLE-4040 MEMBRANE)

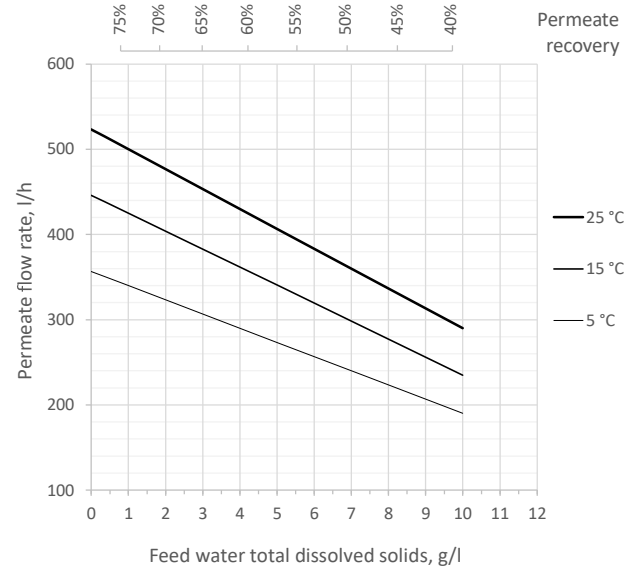

Permeate flow rates are calculated under the following conditions:
 • 2 bar influent water pressure
 • 0 bar backpressure in the permeate line
 • fresh membranes

PIPES AND INSTRUMENTS DIAGRAM

