
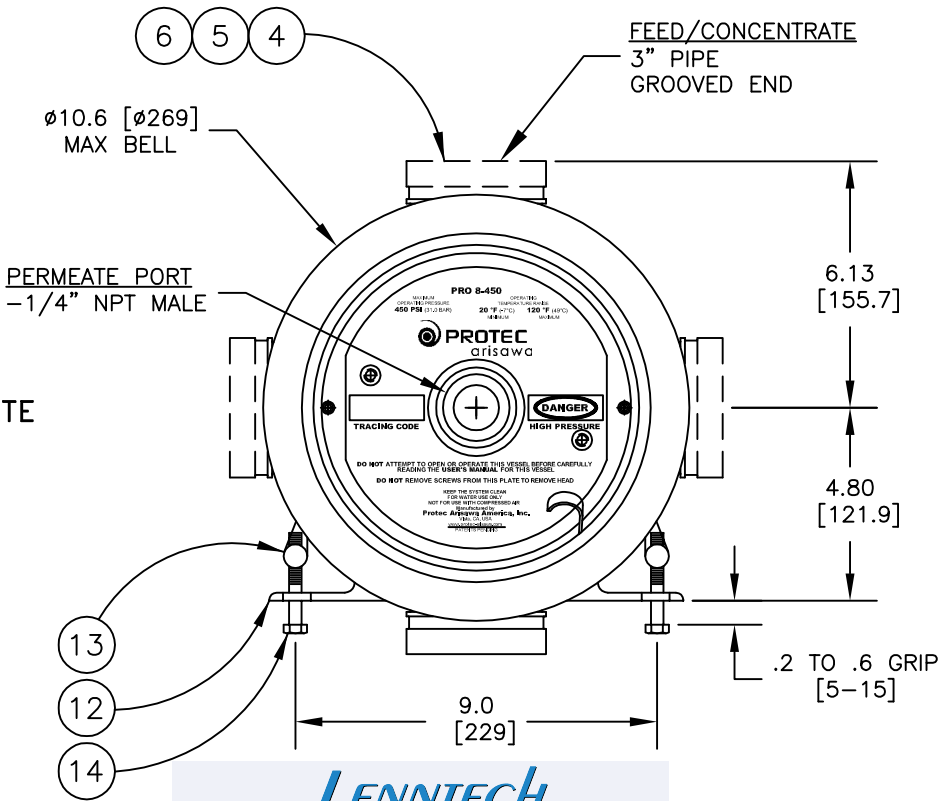


Design Pressure = 450 PSI @ 120 °F
Min. Design Temperature = 20 °F @ 450 PSI
Hydrotest Pressure = 495 PSI

450 PSI
MEGA
SIDE PORT

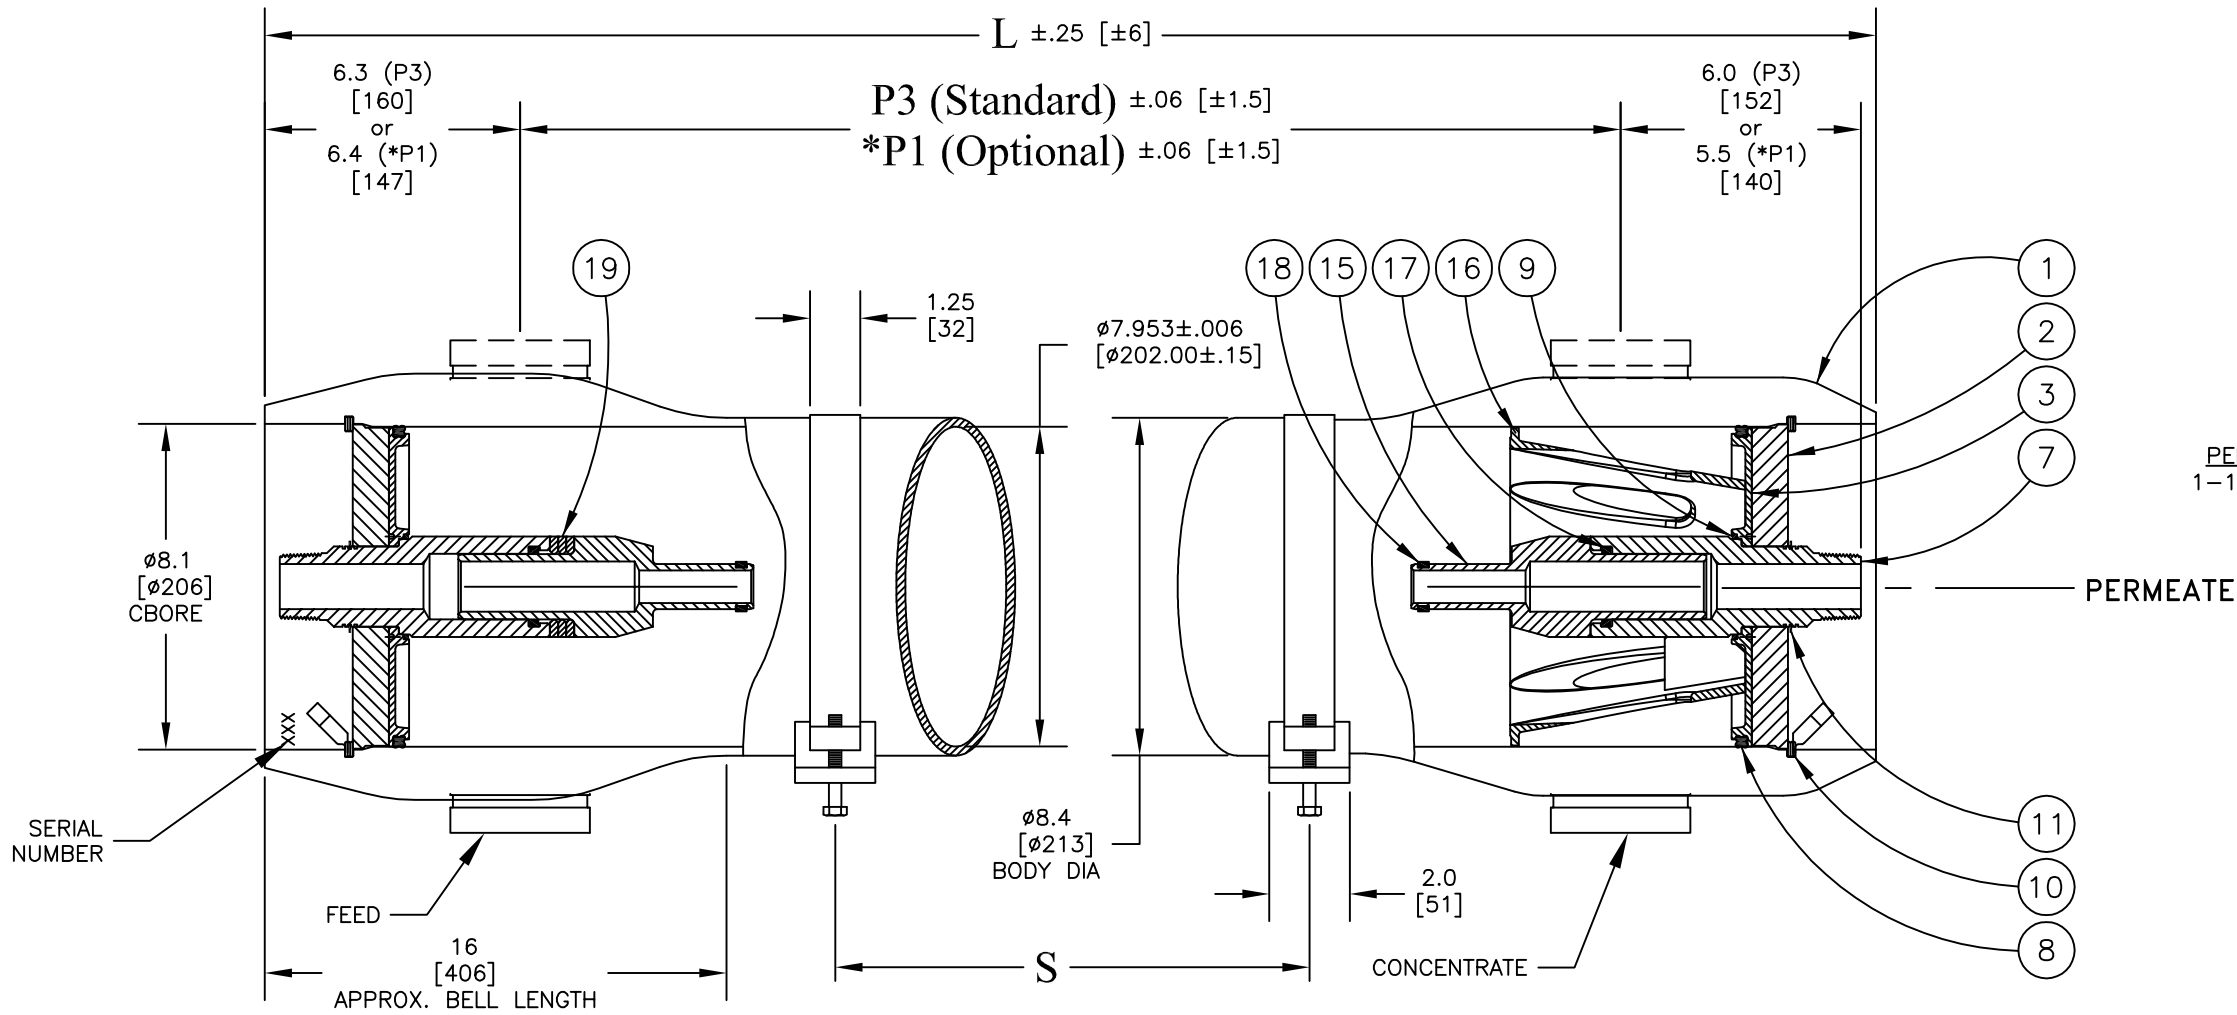

LENNTech
Water Treatment Solutions
info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

NOTES:
DIMENSIONS IN INCHES (MM APPROX.)

FOR REFERENCE ONLY, NOT FOR CONSTRUCTION UNLESS CERTIFIED

SHIMMING OF THE SADDLES MAY BE REQUIRED

CENTER VESSEL ON 2 OR 3 SUPPORTS AT SPAN(S) "S".

INCORRECT MANIFOLDING WILL CAUSE SEVERE LOCAL STRESS AROUND PORT AND MAY RESULT IN LEAKS AND PREMATURE FAILURE. TAKE EVERY PRECAUTION LISTED IN THE ENGINEERING PACKET OR USERS MANUAL.

INTERNAL PERMEATE PRESSURE MUST NOT EXCEED 125 PSI.

ASME SECTION X, 2013
RP CODE STAMP OPTIONAL

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

PROTEC
arisawa
Vista, California, U.S.A.
www.protec-arisawa.com

PRO 8-450-MSP

APPROVED AP 3/16/04	ECO 20002	REVISED 3/31/14	DRAWING 101023	REV Q
CHECKED AP 3/16/04				
DRAWN AP 3/16/04				

***P1 Not Available With 4" Mega Side Port**

Shell Length Code	L inch (mm)	P3 Standard inch (mm)	*P1 Optional inch (mm)	S Span in (mm)	Empty Weight lb (kg)
-1	58.7 [1490.98]	46 [1168.40]	47 [1193.80]	1 @ 28 [711.2]	76 [35]
-1.5	78.7 [1998.98]	66 [1676.40]	67 [1701.80]	1 @ 42 [1066.80]	88 [40]
-2	98.7 [2506.98]	86 [2184.40]	87 [2209.80]	1 @ 56 [1422.40]	99 [45]
-3	138.7 [3522.98]	126 [3200.40]	127 [3225.80]	1 @ 80 [2032.00]	122 [55]
-4	178.7 [4538.98]	166 [4216.40]	167 [4241.80]	2 @ 64 [1625.60]	145 [66]
-5	218.7 [5554.98]	206 [5232.40]	207 [5257.80]	2 @ 78 [1981.20]	168 [76]
-6	258.7 [6570.98]	246 [6248.40]	247 [6273.80]	2 @ 92 [2336.80]	191 [87]
-7	298.7 [7586.90]	286 [7264.40]	287 [7289.80]	2 @ 106 [2692.40]	214 [97]
-7.5	318.7 [8094.80]	306 [7772.40]	307 [7797.80]	2 @ 114 [2895.60]	226 [103]
-8	338.7 [8602.80]	326 [8280.40]	327 [8305.80]	2 @ 120 [3048.00]	237 [108]

ITEM	QTY	P/N	DESCRIPTION	MATERIAL
1	1	4080223	Shell	Filament Wound, Epoxy FRP
2	2	4080030	Bearing Plate	6061-T6 Aluminum, SB-221, Anodized
3	2	4080177-3	Sealing Plate	Noryl GFN2
4	2	4080254-1	Feed/Concentrate Port, 3", "K"	Stainless Steel, 316, SA-312
5	4	6201343	Retaining Ring, F/C Port, 3", "K"	Stainless Steel, 316, SA-479
6	2	6188504-N	O-Ring Seal, F/C Port, 3", "K"	Ethylene Propylene
7	2	4080309	Permeate Port	Noryl GFN2
8	2	6100442MK	Head Seal	Ethylene Propylene
9	2	6110229-N	Permeate Port Seal	Ethylene Propylene
10	2	4080320	Retaining Ring w/ Finger Pull	Stainless Steel, 316
11	2	6121200	Retaining Ring, Permeate Port	Stainless Steel, 316
12	2*	4080174	Support Saddle	Thermoplastic Rubber
13	2	4080137	Strap Assembly	Stainless Steel, 316
14	4	6150001	Strap Screw	Stainless Steel, 18-8
15	2	A/R	Adapter	Thermoplastic
16	1	4080165-1	Thrust Cone	PVC Thermoplastic
17	2	6110326-N	Adapter Seal	Ethylene Propylene
18	A/R	A/R	PWT Seal	Ethylene Propylene
19	3	4080062-4	Shim, Adapter	Noryl GFN2

*3 each with shell lengths -4 and longer.