SFC-SERIES SYSTEMS

WALLACE & TIERNAN® ANALYZERS/CONTROLLERS

The SFC instrumentation system provides for the continuous measurement and control of a wide variety of water quality parameters. As a single input device, the SFC system can be used to monitor any one of a number of different measurement technologies and perform a related control function suited to the specific application. The SFC system can control automatic V-notch positioners in gas feed systems, such as the V10k™ and V2000™ systems, or automatic stroke length positioners and variable speed drives in dosing pump systems to maintain a setpoint concentration. With the SFC unit a second measurement is possible via the SiDiSens module, for example an additional pH measurement to allow a pH corrected chlorine measurement. For multiple measurement applications, the MFC analyzer/controller is available.

Typical applications

- Potable water treatment
- Waste water treatment
- Cooling water circuits
- Industrial and process water treatment
- Swimming pools

FEATURES

The SFC analyzer/controller is a modular system consisting of a wall or panel-mounted electronic module, a flow cell module and a plug-and-play sensor measuring module. The SFC unit can be configured as an analyzer only, with over 10 different measurement choices, a set-point or flow proportional controller or a combined analyzer/controller. The additional control function offers an easy, software selectable range of control modes from flow proportional to compound loop. The pH correction can be accomplished via a SiDiSens module which allows a second measurement with a single SFC unit.

Key Benefits:

- Permits the use of the Wallace & Tiernan® potentiostatic sensors used in the DEPOLOX® 5, Micro/2000® and Deox/2000® modules
- Four different control modes can be selected
- Simple configuration and operation
- Data connection to SCADA via 4 – 20 mA output, Web technology via optional Process Monitoring System and to optional Profibus® DP or Modbus® TCP fieldbus modules

FLOW PROPORTIONAL CONTROL

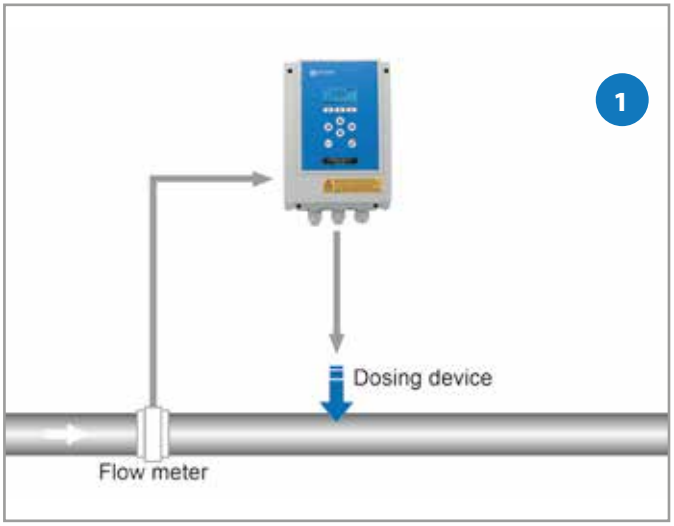

COMPOUND LOOP CONTROL WITH EXTERNAL MEASUREMENT (MA)

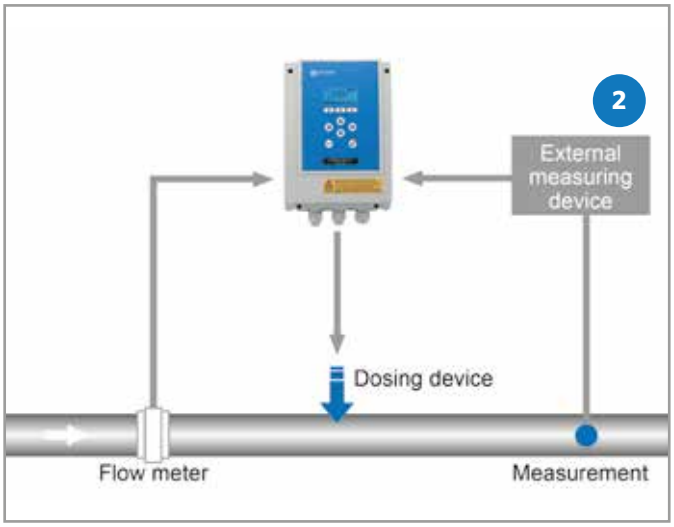

	SFC SC
External setpoint value for single feedback closed loop control and/or combi-control	–
External dosing factor for flow prop control	–
Temperature input	–
Feedback inputs	✓
2 digital inputs	✓
mA outputs	✓
Relay outputs	2
RS 232 interface for Firmware update	✓
Slot for fieldbus modules*	–
RS 485 interface	–
CAN interface for SiDiSens pH module	–
SD card slot	–

1

* available fieldbus modules: Profibus DP, Modbus TCP

SENSOR SELECTION

The portfolio of measurements includes the following parameters, and where appropriate, the supporting measurement modules are depicted.

- Free chlorine
- Total chlorine
- Chlorine dioxide
- Ozone
- Pot. permanganate
- pH value
- Redox (ORP)
- Fluoride
- Conductivity
- Temperature
- Standard sensors/measurement with a milliamp signal

The application and water quality will determine what measurement module best suits the application.

The DEPOLOX® 5 measurement module uses the potentiostatic bare electrode technology that is fast acting to a change in chlorine concentration and therefore well suited for disinfection control. It incorporates continuous hydromechanical cleaning of the sensor. The Micro/2000® and Deox/2000® measurement modules are also potentiostatic bare electrodes that can incorporate the addition of buffer chemicals.

The Micro/2000 and Deox/2000 measurement modules can be used in poor quality water without fouling. The Micro/2000 module offers unmatched accuracy of chlorine measurements down to one part per billion. The Deox/2000 module is utilized for dechlorination chemistry measurements. The membrane measurement module utilizes membrane covered electrodes with the VariaSens flow cell and is the least affected by water supply chemistry variations. Strantrol® flowcell with proprietary HRR® sensor provides highest accuracy in ORP measurment designed for industrial applications.

MEASUREMENT
SINGLE FEEDBACK CLOSED-LOOP CONTROL

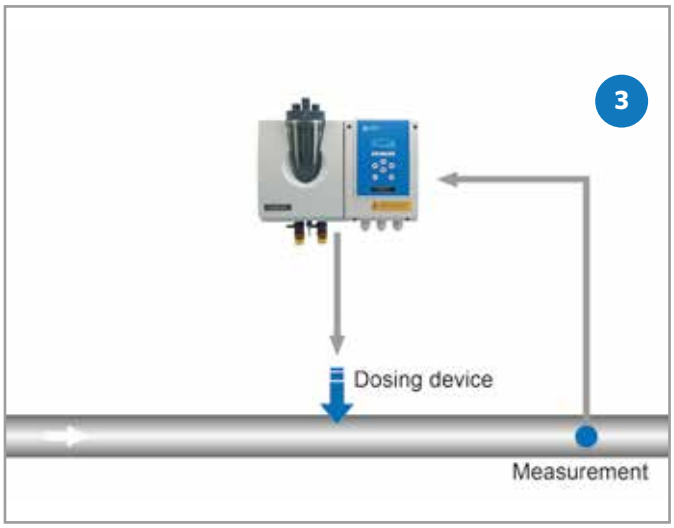

MEASUREMENT
WITH COMPOUND LOOP CONTROL

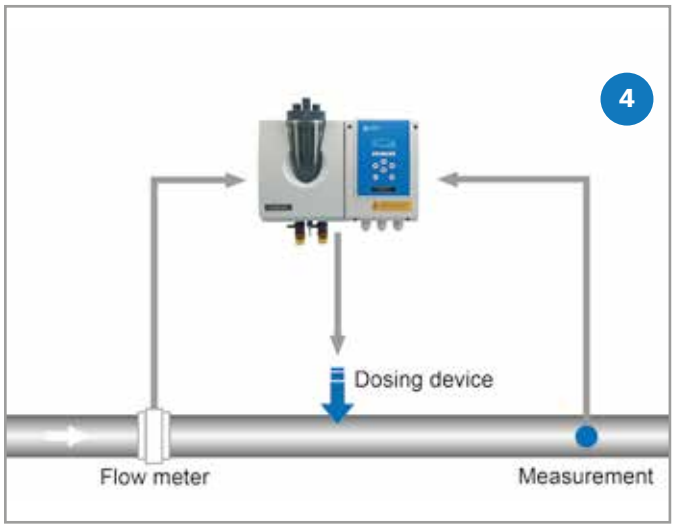

SFC PC	SFC with measuring module	SFC with meas. module & control functionality
✓ 2	✓ 3	✓ 4
✓	–	✓
–	✓	✓
✓	✓	✓
✓	✓	✓
✓	✓	✓
4	4	4
✓	✓	✓
✓	✓	✓
✓	✓	✓
–	✓	✓
✓	✓	✓

CONTROL OPTIONS

Both flow proportional and compound loop control are available with the SFC. The control mode required should be specified when ordering the equipment. With the wide range of SFC versions available, nearly all conceivable water treatment applications, including single feedback closed-loop control, can be monitored and controlled.

Each measuring system has an optional integrated controller that can be used with external setpoint selection (as well as with single feedback closed-loop control). Depending on the application, the control parameters can also be used to control actuators such as the V10k gas feed system, dosing pumps, or frequency converters..

The flow proportional control SFC SC enables proportionally controlled feed of chemicals used in water treatment and for industrial applications. The dosing capacity of the connected device is controlled automatically, on the basis of a measuring signal, for example an external flow rate measurement, and a configurable dosing factor. If actuators with feedback are used, the non-linearity can be adjusted using a maximum of 11 calibration points.

TECHNICAL DATA
SFC ELECTRONIC MODULE

Display:
Graphical display, resolution 128 x 64 pixels, white background illumination

Mesurement inputs:
1 x measured value input (electrically isolated up to 50 V to ground) for plug-in cards of the sensor measuring module (not with SFC SC):

- 3-electrode cell for chlorine, ozone, chlorine dioxide and potassium permanganate DEPOLOX® 5, Micro/2000® and Deox/2000® modules
- Membrane sensors for total chlorine (TC3), free chlorine (FC2), chlorine dioxide (CD7), ozone (OZ7)
- pH value
- Redox voltage (ORP) with HRR® sensor or standard sensor
- Fluoride
- Conductivity
- mA/V input

1 x mA input for flow rate 0 – 20 mA/4 – 20 mA

1 x mA input for external setpoint or dosing factor 0 – 20 mA/4 – 20 mA (not applicable to SFC SC)

1 x temperature input PT 1000 (0 – 50 °C/32 – 122 °F) with sensor error display (not applicable to SFC SC/SFC PC)

1 x feedback input for servo motor position feedback (1 kΩ, 5 kΩ, mA, V)

Digital inputs:
2 x for voltage-free contact (< 100 Ω) for controller stop, flow control

Relay outputs:
4 free selectable two-way switches for process monitoring; SFC SC: 2 alarm/control contacts

mA outputs:
1 x mA output for measurement or control output (freely configurable)
Output 0/4 – 20 mA
Accuracy < 0.5 % FS
Load protected ≤ 500 Ω
Temperature drift max. 0.2 % / 10 °C
Electrically isolated up to 50 V to ground

Interfaces:
1 x RS 485 for connection to a Process Monitoring System and OPC-Server.
The RS 485 interface is electrically isolated up to 50 V to ground.

1 x CAN interface (not applicable to SFC SC and SFC PC)

1 x slot for fieldbus connection: Profibus® DP, Modbus® TCP (not applicable to SFC SC)

1 x RS 232 for firmware updates (not electrically isolated)

Memory card:
1 x SD memory card slot for installation of an SD memory card (not applicable to SFC SC)

Power supply:
100 – 240 V AC ± 10 %, 50 – 60 Hz, 30 VA
24 V DC ± 20 %, 15 W

Enclosure: IP 66, designed to meet NEMA 4X

Testing and marking:
CE, EMC-EN 61326
IEC EN 61010
UL listed/CSA certified

Ambient temperature:
0 – 50 °C, (32 – 122 °F)
(do not expose to direct sunlight)

Storage temperature: -20 to +70 °C (12 – 158 °F)

Dimensions (W x H x D):
185 x 265 x 145 mm (7.3 x 10.4 x 5.7 “)

Weight: approx. 2.5 kg (5.5 lbs)

LENNTECH
WATER TREATMENT SOLUTIONS
info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

EVOQUA WATER TECHNOLOGIES

DEPOLOX, Deox/2000, HRR, Micro/2000, Strantrol, V10k, V2000, VariaSens and Wallace & Tiernan are trademarks of Evoqua Water Technologies LLC, its subsidiaries or affiliates. CSA is a trademark of the Canadian Standards Association. Modbus is a trademark of Schneider Automation, Inc. NEMA is a trademark of the National Electrical Manufacturers Association. Profibus is a trademark of Profibus International. UL is a trademark of Underwriters Laboratories, Inc. All information presented herein is believed reliable and in accordance with accepted engineering practices. Evoqua makes no warranties as to the completeness of this information. Users are responsible for evaluating individual product suitability for specific applications. Evoqua assumes no liability whatsoever for any special, indirect or consequential damages arising from the sale, resale or misuse of its products.

© 2019 Evoqua Water Technologies GmbH Subject to change without notice WT.050.590.000.DE.PS.0519