



Melt Blown Depth Filter Cartridge

"Eaton's LOFTREX Cartridge is the economical choice for a variety of applications, including chemicals, radioactive waste, ink, wastewater, aqueous solutions and food & beverage. Ideal for use as a blowdown post filter and prefiltration for reverse osmosis systems."

Constructed of 100% polypropylene media, Eaton's disposable LOFTREX cartridge is designed to be chemically compatible for use in a wide range of process fluids.

FDA Listed Materials

LOFTREX polypropylene materials comply with the regulations of the Food and Drug Administration (FDA) title 21 of the Code of Federal Regulations Sections 174.5, 177.1520 and 177.1630, as applicable for contact with food and beverage fluids.

LENNTECH bv
Info@lennotech.com
Tel. +31-15-261.09.00
Fax. +31-15-261.62.82

Micron ratings

1, 3, 5, 10, 20, 30, 50, 75 μ m

Outside diameter

2.5" (6.35 cm), 2.75" (7 cm)

Inside diameter

1.0" (2.54 cm)

Nominal lengths

9.75", 10", 20", 30", 40"
(24.8, 25.4, 50.8, 76.2, 101.6 cm)
Other lengths available upon request

Operating Parameters

Recommended disposal changeout pressure

35 psid (2.4 bar)

Max differential pressure

50 psid @ 70°F (3.45 bar @ 21°C)
25 psid @ 140°F (1.72 bar @ 60°C)



Powering Business Worldwide

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289



The LOFTREX filter is available with a variety of gasket, O-ring and end cap configurations.

Nominal Length

-9	9.75"
-10	10"
-19	19.5"
-20	20"
-29	29.25"
-30	30"
-39	39"
-40	40"

Filter Specification Code

Gasket or O-Ring

S	Silicone
B	Buna-N
E	EPDM
V	Viton
T	FEP/Viton (O-Rings only)
N	None

LX	-20	-10	-4	E
----	-----	-----	----	---

Filter Series LOFTREX


Retention Rating

-1	micron
-3	micron
-5	micron
-10	micron
-20	micron
-30	micron
-50	micron
-75	micron

End Configuration

DOE	Double Open End
-1	226/Flat Single Open End
-2	222/Fin Single Open End
-3	226/Fin Single Open End
-4	222/Flat Single Open End
-P6	Self-Seal Spring on One End
-N	None (Cut End)
-1X	Extended Core
-DBG	Direct Bond Gaskets

LOFTREX Flow Rate (Water at 65°F/20°C)

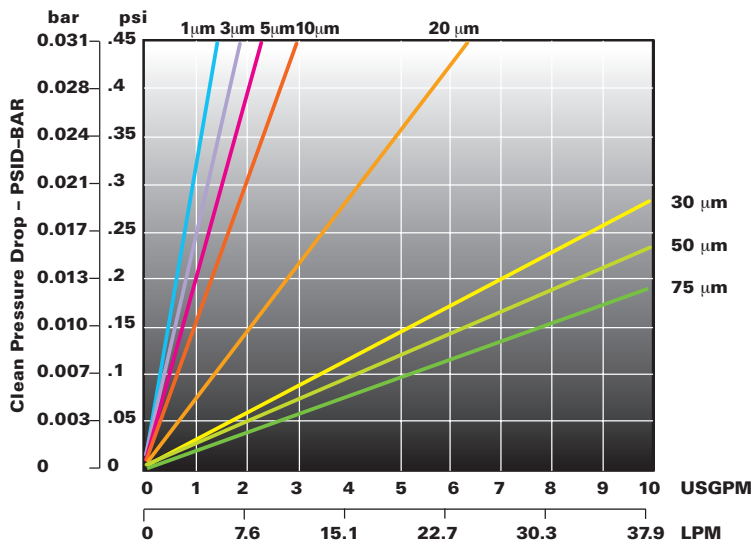

©2009 Eaton Corporation. All Rights Reserved.
All trademarks and registered trademarks are the property of their respective owners. Litho USA

LENNTECH

info@lennotech.com Tel. +31-152-610-900
www.lennotech.com Fax. +31-152-616-289

All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

EATON

Powering Business Worldwide

EF-LX
5-2010