

CRK 4-160/16 A-W-A-AUUV 3kW 3x400D 50Hz

Grundfos Pump 41907216



Thank you for your interest in our products

Please contact us for more information, or visit our website

<http://www.lenntech.com/grundfos/CRK04/41907216/CRK-4-160-16-A-W-A-AUUV.html>

info@lenntech.com


tel. +31-15-261.09.00

fax. +31-15-261.62.89

Position	Qty.	Description
	1	CRK 4-160/16 A-W-A-AUUV  Note! Product picture may differ from actual product Product No.: 41907216 Multistage, immersible, self-priming, centrifugal pump for vertical installation in tanks etc. The pump has the following characteristics: - Installation length according to DIN 5440. - Impellers, intermediate chambers and spline shaft are made of Stainless steel. - Mechanical shaft seal according to EN 12756. - Power transmission via cast iron split coupling. The motor is a 3-phase AC motor. Immersion depth: 547 mmm Liquid: Pumped liquid: Water Liquid temperature range: 263 .. 363 K Liquid temp: 293 K Density: 998.2 kg/m³ Technical: Speed for pump data: 2900 rpm Rated flow: 6 m³/h Rated head: 102 m Shaft seal: AUUV Curve tolerance: ISO 9906:1999 Annex A Materials: Pump head: Cast iron EN-JL1030 ASTM A48-30 B Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304 Installation: Maximum ambient temperature: 333 K Pipe connection: G 1 1/4 Flange size for motor: FT130

Position	Qty.	Description
		Electrical data: Motor type: 100LC Number of poles: 2 Rated power - P2: 3 kW Power (P2) required by pump: 3 kW Mains frequency: 50 Hz Rated voltage: 3 x 380-415 D V Rated current: 6.3 A Starting current: 840-920 % Cos phi - power factor: 0,87-0,82 Rated speed: 2900-2920 rpm Motor efficiency at full load: 84,6-84,6 % Motor efficiency at 3/4 load: 86-86 % Motor efficiency at 1/2 load: 85,5-84 % Enclosure class (IEC 34-5): 55 (Protect. water jets/dust) Insulation class (IEC 85): F Others: Minimum efficiency index, MEI $\geq$: 0,70 Net weight: 35.7 kg

41907216 CRK 4-160/16 50 Hz

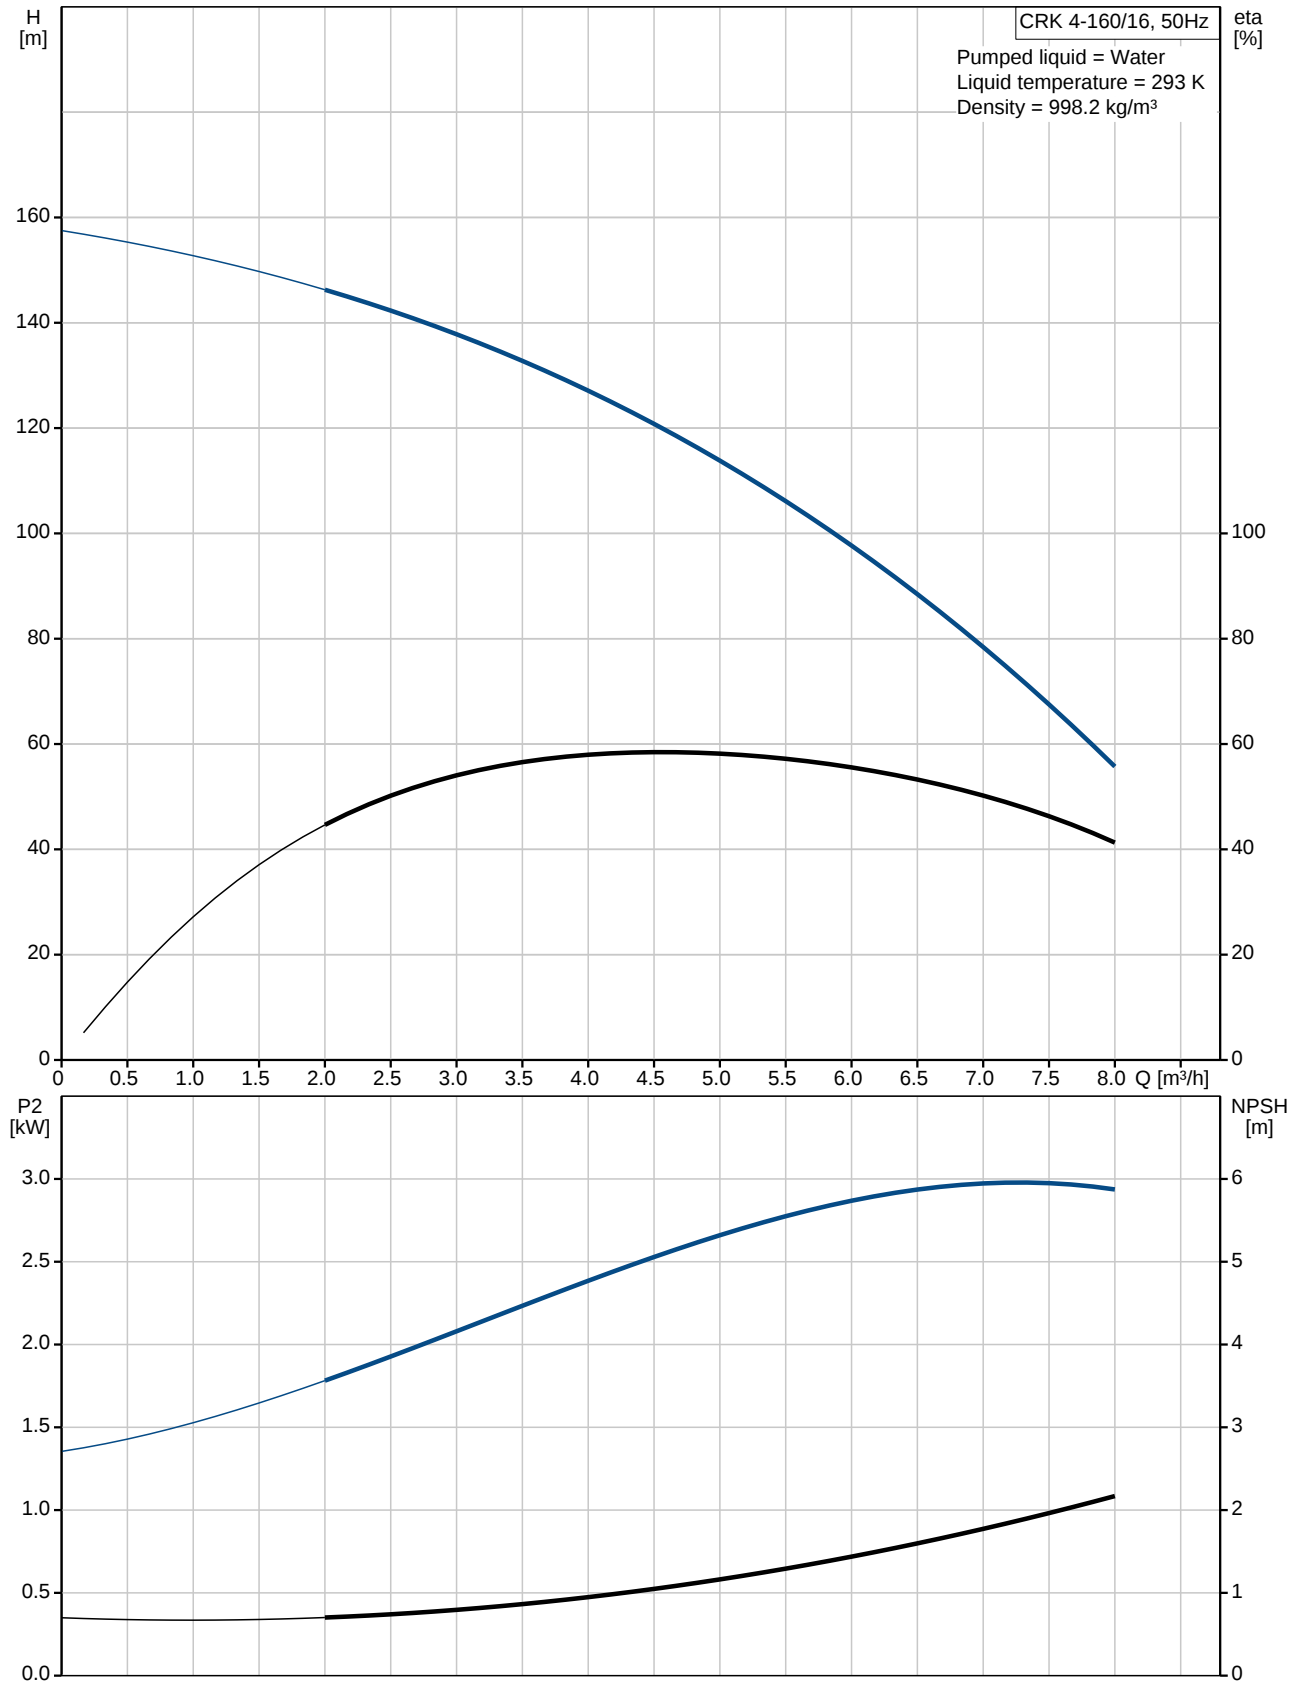

Description	Value
Product name:	CRK 4-160/16 A-W-A-AUUV
Product No:	41907216
EAN number:	5700390752453

Technical:

Speed for pump data:	2900 rpm
Rated flow:	6 m³/h
Rated head:	102 m
Impellers:	16
Shaft seal:	AUUV
Curve tolerance:	ISO 9906:1999 Annex A
Stages:	16
Pump version:	A
Model:	B

Materials:

Pump head:	Cast iron
	EN-JL1030
	ASTM A48-30 B
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Material code:	A

Installation:

Maximum ambient temperature:	333 K
Connect code:	W
Pipe connection:	G 1 1/4
Flange size for motor:	FT130

Liquid:




Pumped liquid:	Water
Liquid temperature range:	263 .. 363 K
Liquid temp:	293 K
Density:	998.2 kg/m ³

Electrical data:

Motor type:	100LC
Number of poles:	2
Rated power - P2:	3 kW
Power (P2) required by pump:	3 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-415 D V
Rated current:	6.3 A
Starting current:	840-920 %
Cos phi - power factor:	0,87-0,82
Rated speed:	2900-2920 rpm
Motor efficiency at full load:	84,6-84,6 %
Motor efficiency at 3/4 load:	86-86 %
Motor efficiency at 1/2 load:	85,5-84 %
Enclosure class (IEC 34-5):	55 (Protect. water jets/dust)
Insulation class (IEC 85):	F
Motor protec:	PTC
Motor No:	85D15510


Others:

Minimum efficiency index, MEI ≥:	0,70
Net weight:	35.7 kg

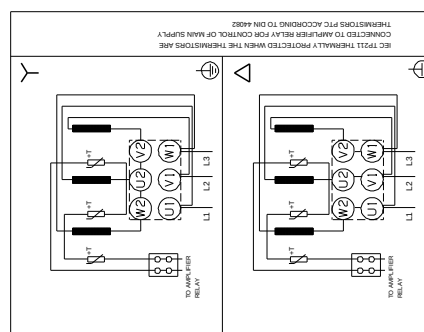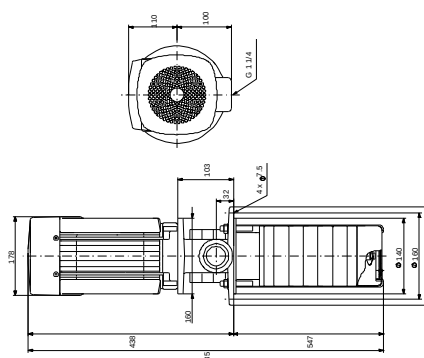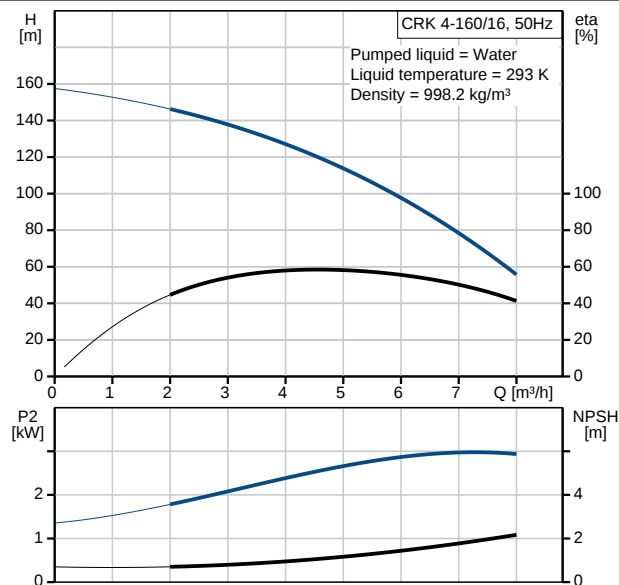


Company name: Lenntech BV - lenntech.com
Created by: info@lenntech.com
Phone: +31 15 2610900
Fax: +31 15 2616289
Date: -

41907216 CRK 4-160/16 50 Hz

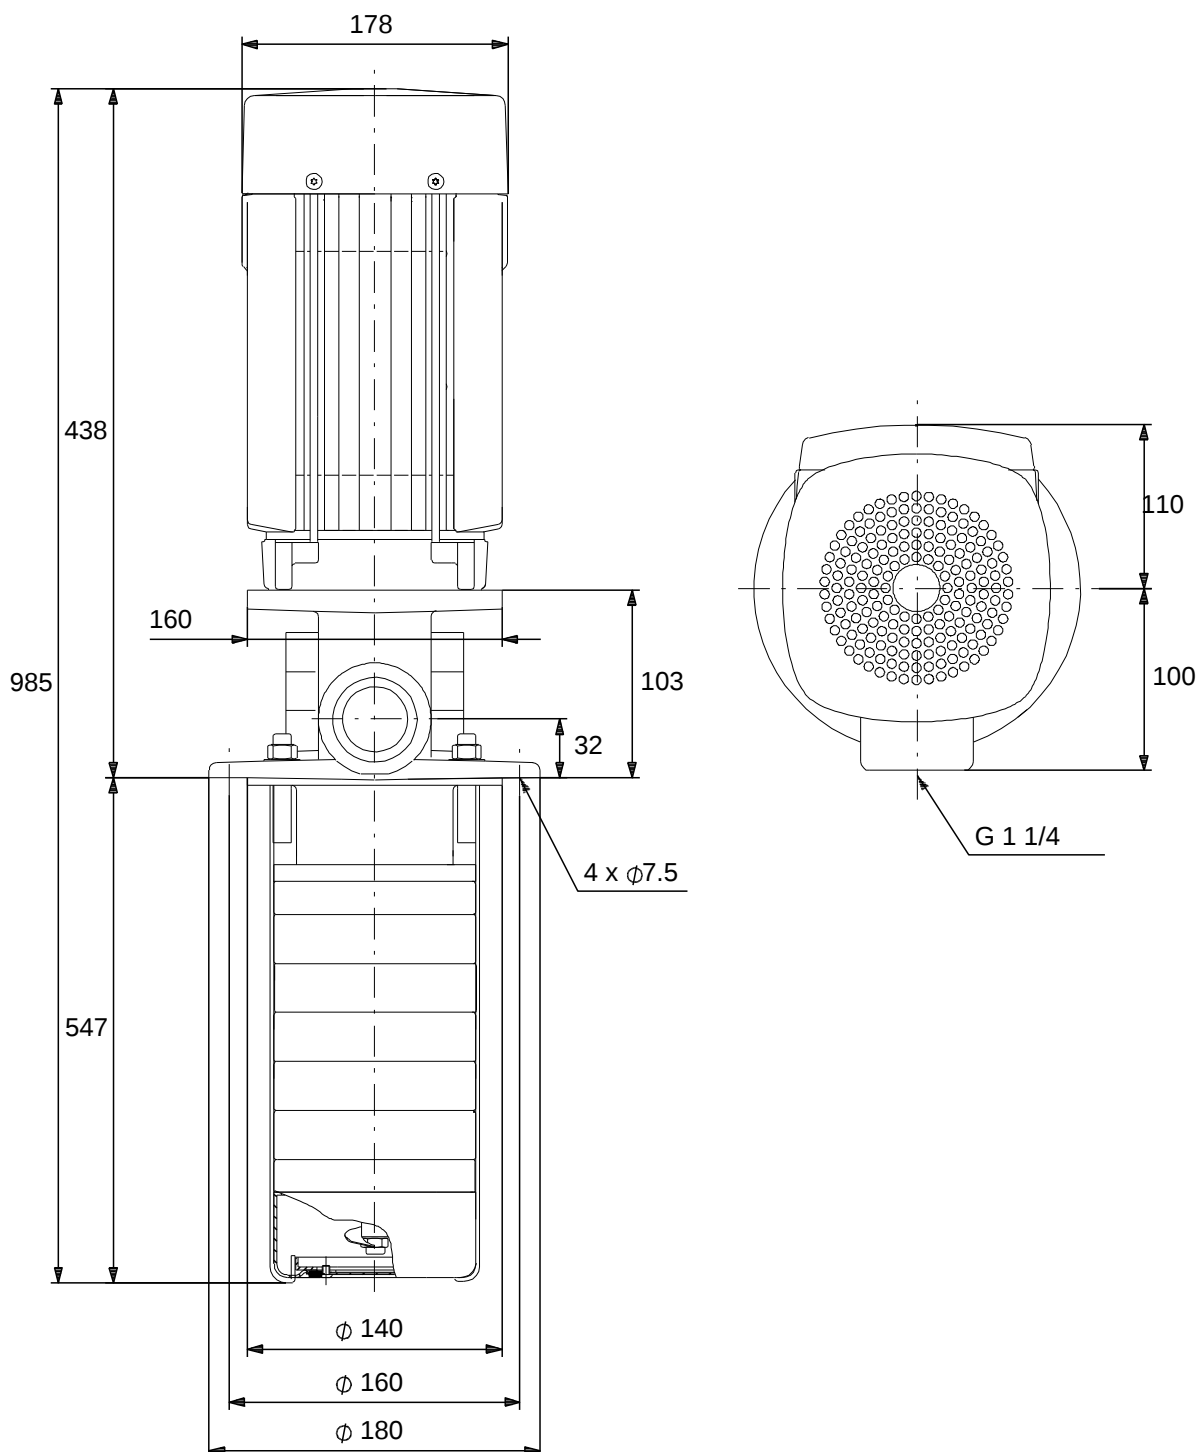

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

41907216 CRK 4-160/16 50 Hz

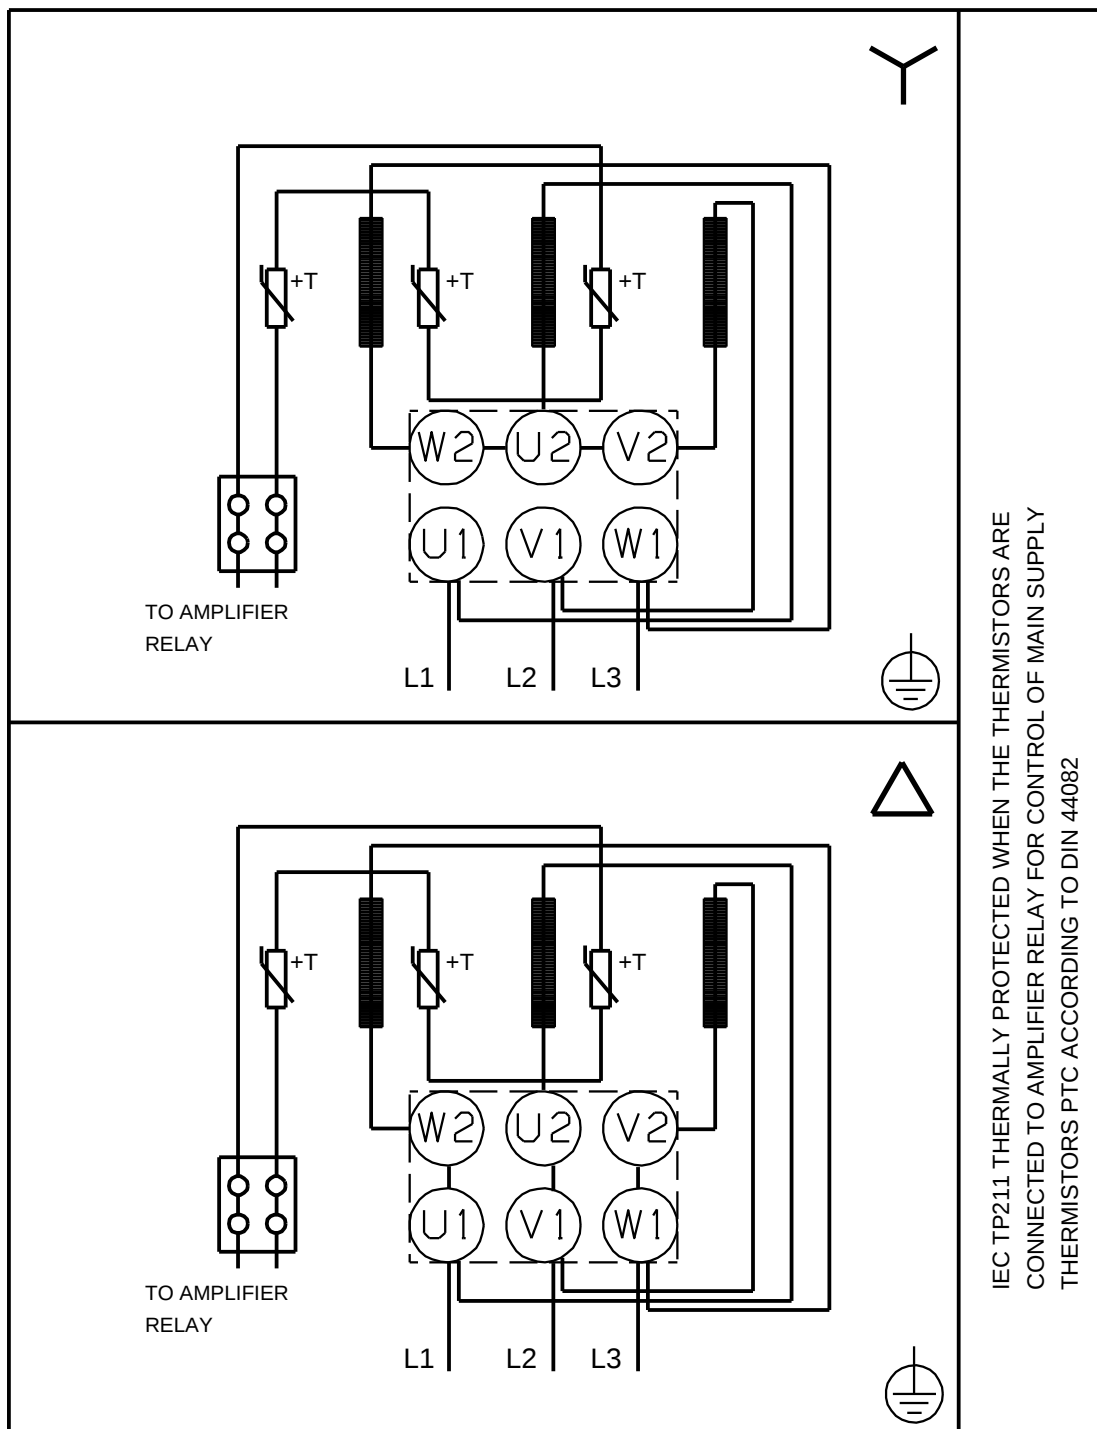

Note! All units are in [mm] unless others are stated.

*Disclaimer: The information about the Grundfos pump in this document may be outdated.
Data may be subject to alterations without further notice.
Please contact us to verify the data above is still accurate/up-to-date.*

All information is copyright Grundfos.



info@lenntech.com

www.lenntech.com

tel. +31-15-261.09.00

fax. +31-15-261.62.89