

UP20-15 N 150 1x230V 50Hz 9H

Grundfos Pump 59641500



Thank you for your interest in our products

Please contact us for more information, or visit our website

<https://www.lenntech.com/grundfos/UPSB1/59641500/UP-20-15-N-150.html>

info@lenntech.com


tel. +31-15-261.09.00

fax. +31-15-261.62.89





Position	Qty.	Description
	1	UP 20-15 N 150  Note! Product picture may differ from actual product Product No.: 59641500 The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing. The bearings are lubricated by the pumped liquid. The pump is characterized by: * Ceramic shaft and radial bearings. * Carbon axial bearing. * Stainless steel rotor can and bearing plate. * Corrosion-resistant impeller, Composite, PES/PP. * Stainless steel pump housing. The motor is a 1-phase motor. No additional motor protection is required. Liquid: Pumped liquid: Water Liquid temperature range: 2 .. 110 °C Liquid temperature during operation: 60 °C Density: 983.2 kg/m³ Technical: TF class: 110 Approvals on nameplate: CE,VDE,EAC Materials: Pump housing: Stainless steel DIN W.-Nr. 1.4301 AISI 304 Impeller: Composite, PES/PP Installation: Amb. max at 80 dgr C liquid: 80 °C Maximum operating pressure: 10 bar Pipe connection: G 1 1/4 Pressure rating: PN 10 Port-to-port length: 150 mm Electrical data: Max. power input: 65 W Mains frequency: 50 Hz Rated voltage: 1 x 230 V Current in speed 3: 0.28 A Capacitor size - run: 2 µF Enclosure class (IEC 34-5): IP44 Insulation class (IEC 85): F Others: Net weight: 2.1 kg Gross weight: 2.3 kg

Position	Qty.	Description
		Shipping volume: 0.004 m ³ Danish VVS No.: 380615100 Swedish RSK No.: 5803011 Finnish: LVI NO 4615604 Norwegian NRF no.: NRF NO 9042209


59641500 UP 20-15 N 150 50 Hz

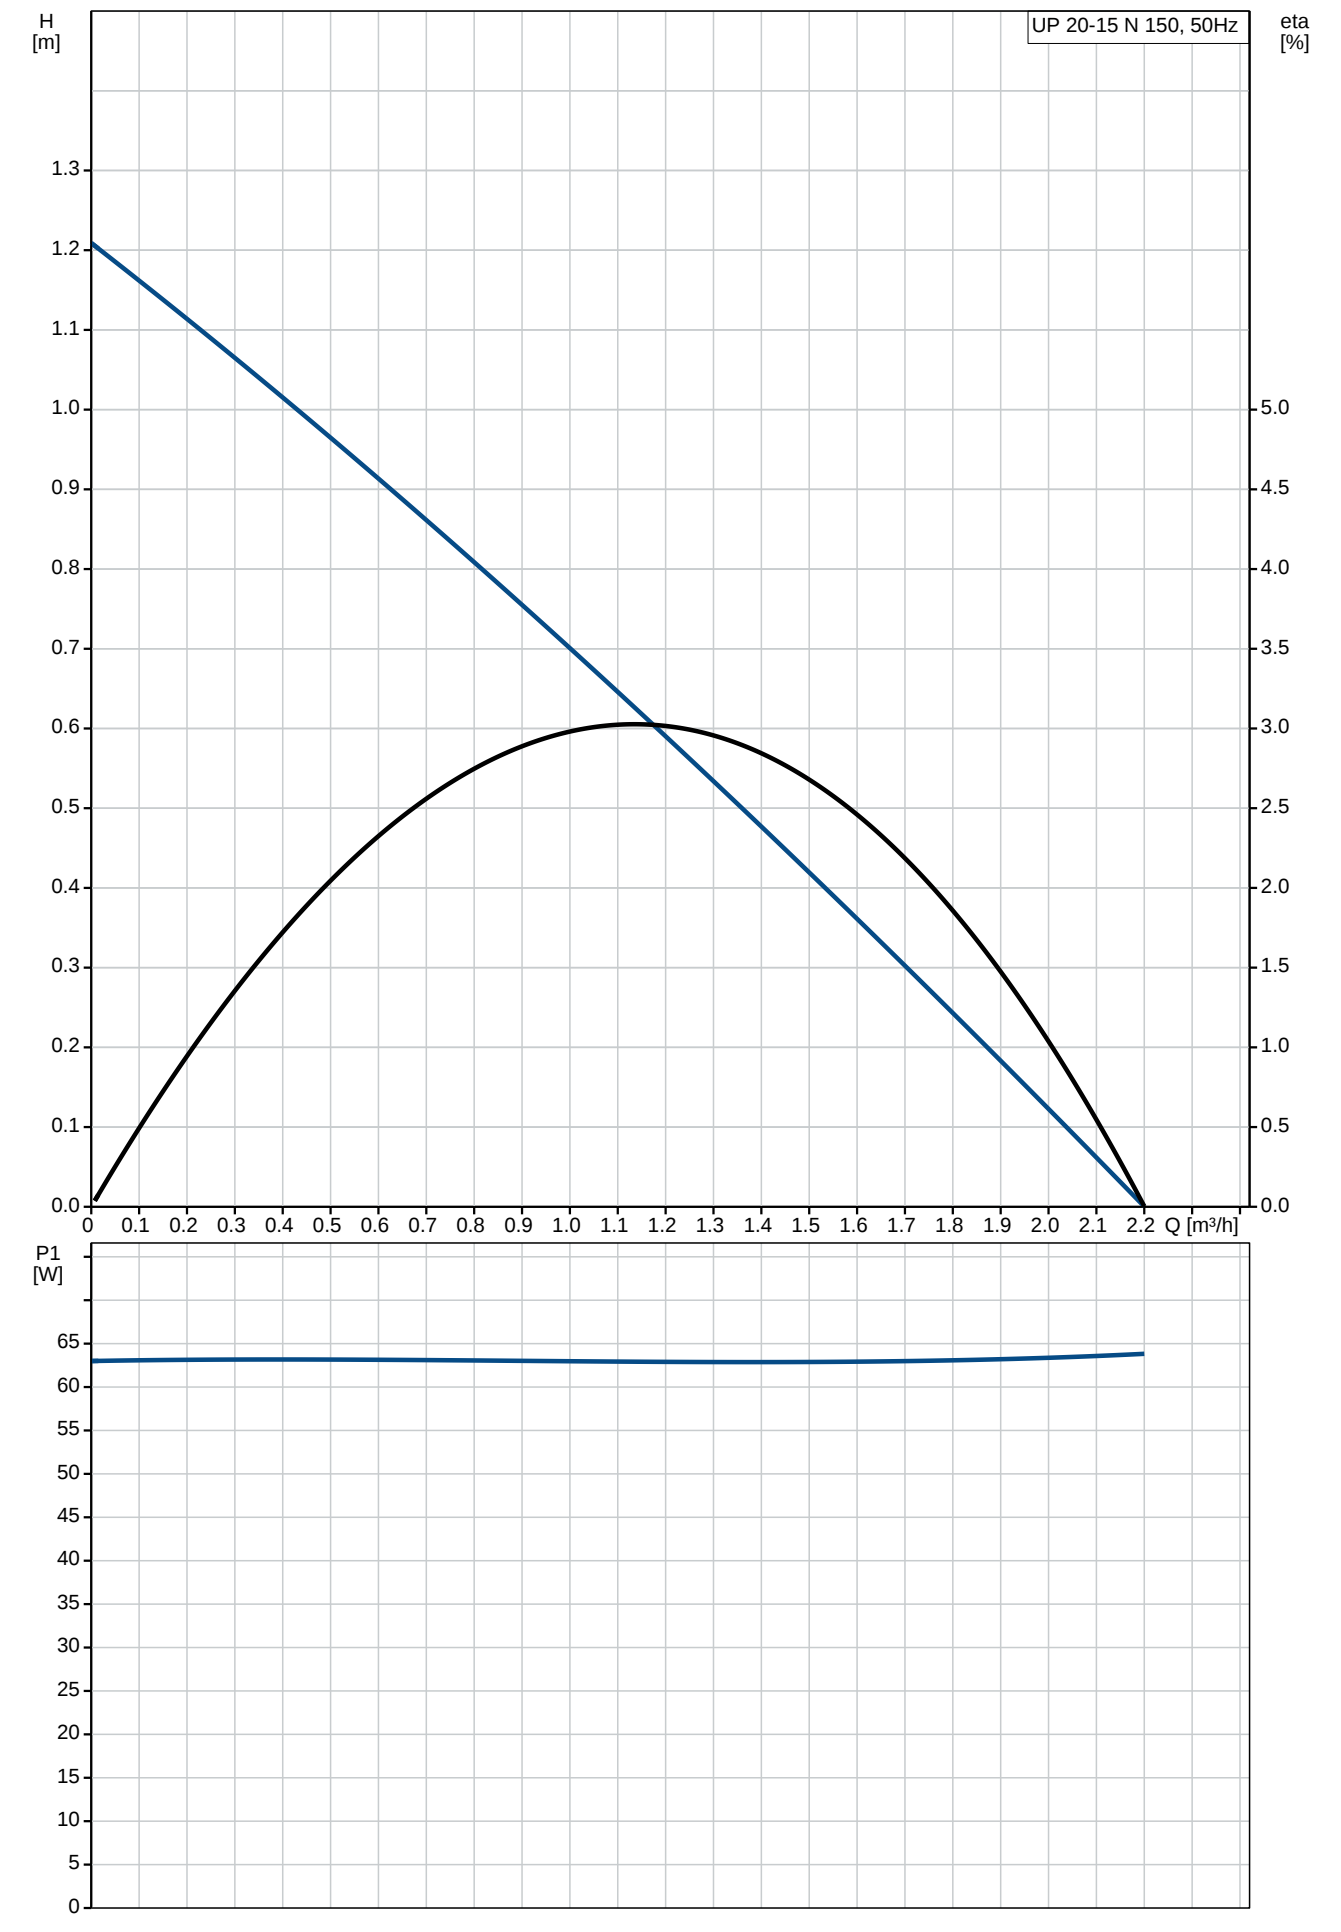

Description	Value
General information:	
Product name:	UP 20-15 N 150
Product No:	59641500
EAN number:	5708601058738
Technical:	
Speed no:	1
Head max:	15 dm
TF class:	110
Approvals on nameplate:	CE,VDE,EAC
Materials:	
Pump housing:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Impeller:	Composite, PES/PP
Installation:	
Amb. max at 80 dgr C liquid:	80 °C
Maximum operating pressure:	10 bar
Pipe connection:	G 1 1/4
Pressure rating:	PN 10
Port-to-port length:	150 mm
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	2 .. 110 °C
Liquid temperature during operation:	60 °C
Density:	983.2 kg/m³
Electrical data:	
Max. power input:	65 W
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Current in speed 3:	0.28 A
Capacitor size - run:	2 µF
Enclosure class (IEC 34-5):	IP44
Insulation class (IEC 85):	F
Motor protec:	NONE
Thermal protec:	Impedance protected
Controls:	
Pos term box:	9H
Others:	
Net weight:	2.1 kg
Gross weight:	2.3 kg
Shipping volume:	0.004 m³
Danish VVS No.:	380615100
Swedish RSK No.:	5803011
Finnish:	LVI NO 4615604
Norwegian NRF no.:	NRF NO 9042209

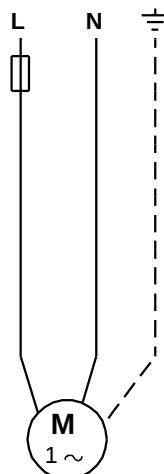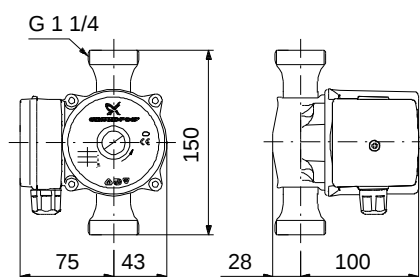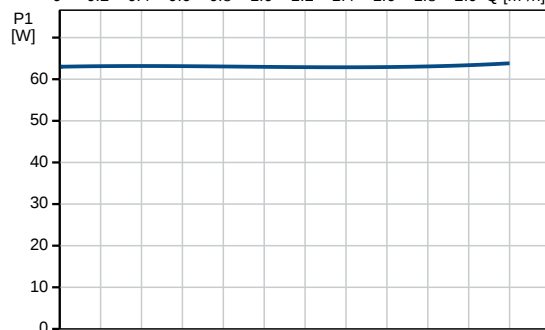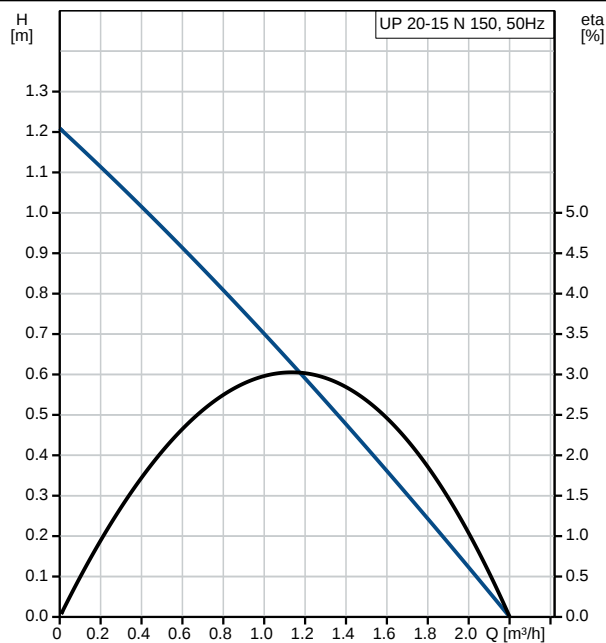


59641500 UP 20-15 N 150 50 Hz

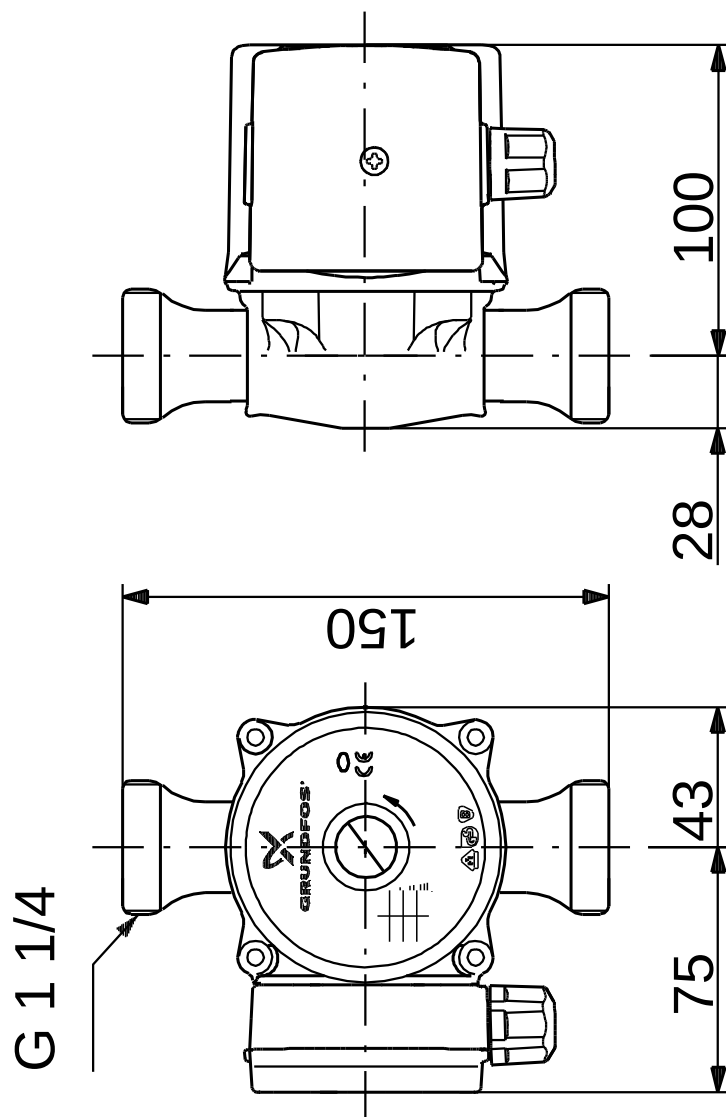

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

59641500 UP 20-15 N 150 50 Hz

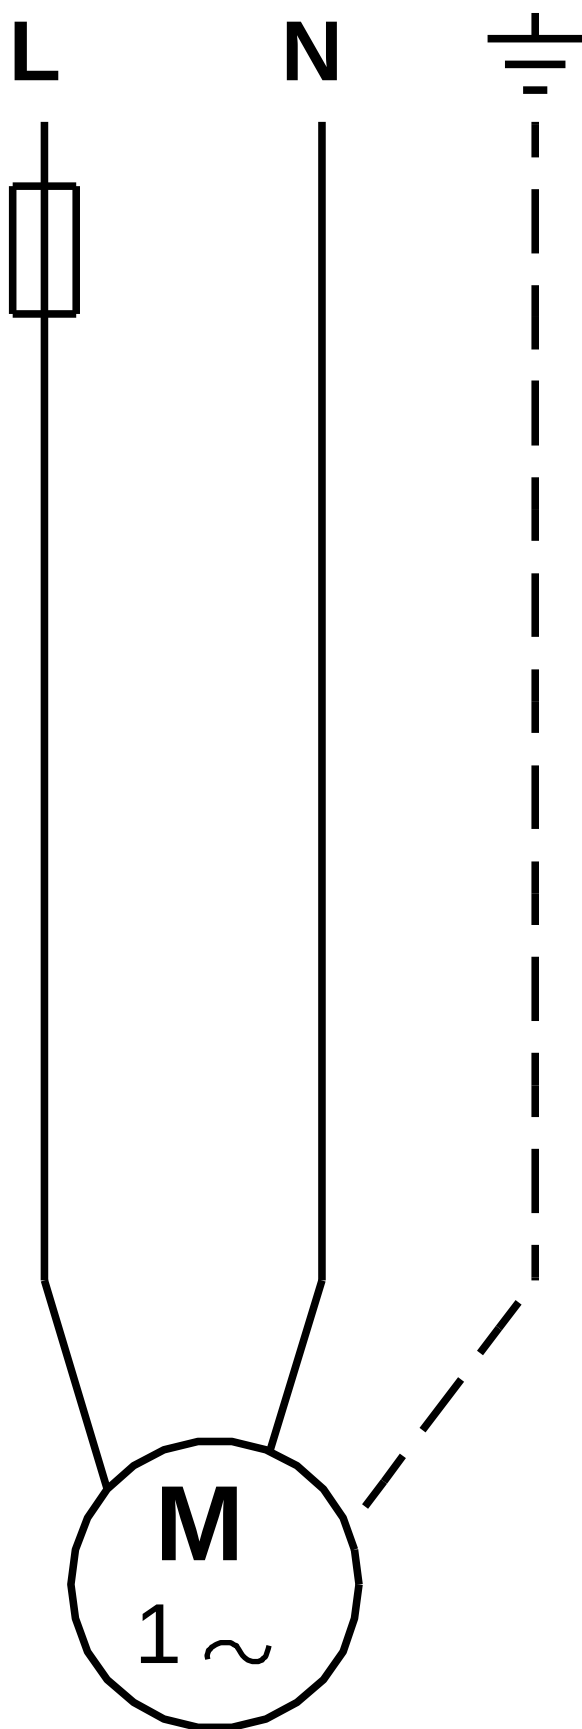

Note! All units are in [mm] unless others are stated.

*Disclaimer: The information about the Grundfos pump in this document may be outdated.
Data may be subject to alterations without further notice.
Please contact us to verify the data above is still accurate/up-to-date.*

All information is copyright Grundfos.



info@lenntech.com

www.lenntech.com

tel. +31-15-261.09.00

fax. +31-15-261.62.89