

Liftaway B 40-1-(AP12) Grundfos pump 96003975



Thank you for your interest in our products. Please contact us for more information, or visit our website

<https://www.lenntech.com/grundfos/LIFTACC/96003975/LIFTAWAY-B40-1.html>


info@lenntech.com

tel. +31 152 610 900



fax. +31 152 616 289

Position	Qty.	Description
	1	LIFTAWAY B40-1  Note! Product picture may differ from actual product Product No.: On request Collecting tank for grey wastewater The 100-litre tank is designed to be equipped with a Unilift AP12 pump to get a compact lifting station for underfloor installation in basements to collect grey wastewater below sewer level and lift it up to the main sewer. The lifting station is suitable for pumping grey wastewater with a maximum particle size of 12 mm from washing machines, showers, washbasins, sinks, etc. The lifting station must not pump wastewater containing discharge from toilets. The prefabricated corrosion-proof polyethylene tank has three inlets, DN 100, a vent, DN 70, an outlet, R 1/4, and a cable entry. The tank cover has a floor drain with a siphon. You can use both sides of the cover. One side has an anti-slip surface; the other is prepared for paving tiles. The cover is placed on an extension neck to adjust the height to the basement floor. Note: An additional tank extension is available as accessory The pipe kit delivered with the tank includes a non-return flap valve and lever arm guide, which is to be clipped onto the pump for reliable start and stop. The pump must be ordered separately. You can choose the pump from the UNILIFT AP12.40 range. The pump must have a float switch for automatic start and stop, version A1 Liquid: Maximum liquid temperature: 70 °C Technical: Designed for number of pumps: 1 Materials: Tank: Polyethylene Others: Gross weight: 14.7 kg Danish VVS No.: 391392140 Swedish RSK No.: 5884510 Finnish: LVI NO 4965354

Description	Value
General information:	
Product name:	LIFTAWAY B40-1
Product No:	On request
EAN number:	On request
Technical:	
Designed for number of pumps:	1
Materials:	
Tank:	Polyethylene
Liquid:	
Maximum liquid temperature:	70 °C
Others:	
Designed for:	AP12
Gross weight:	14.7 kg
Danish VVS No.:	391392140
Swedish RSK No.:	5884510
Finnish:	LVI NO 4965354

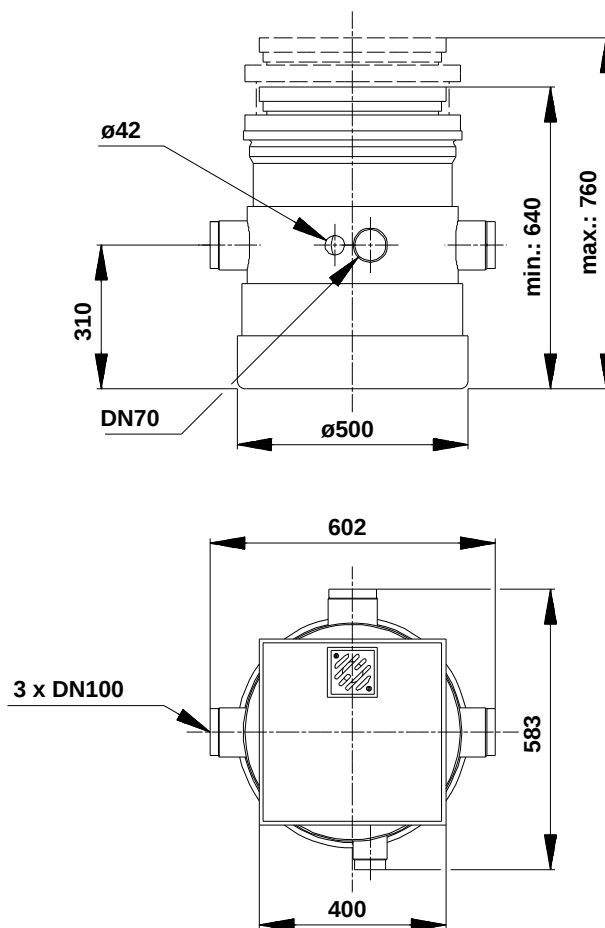


On request LIFTAWAY B40-1 50 Hz

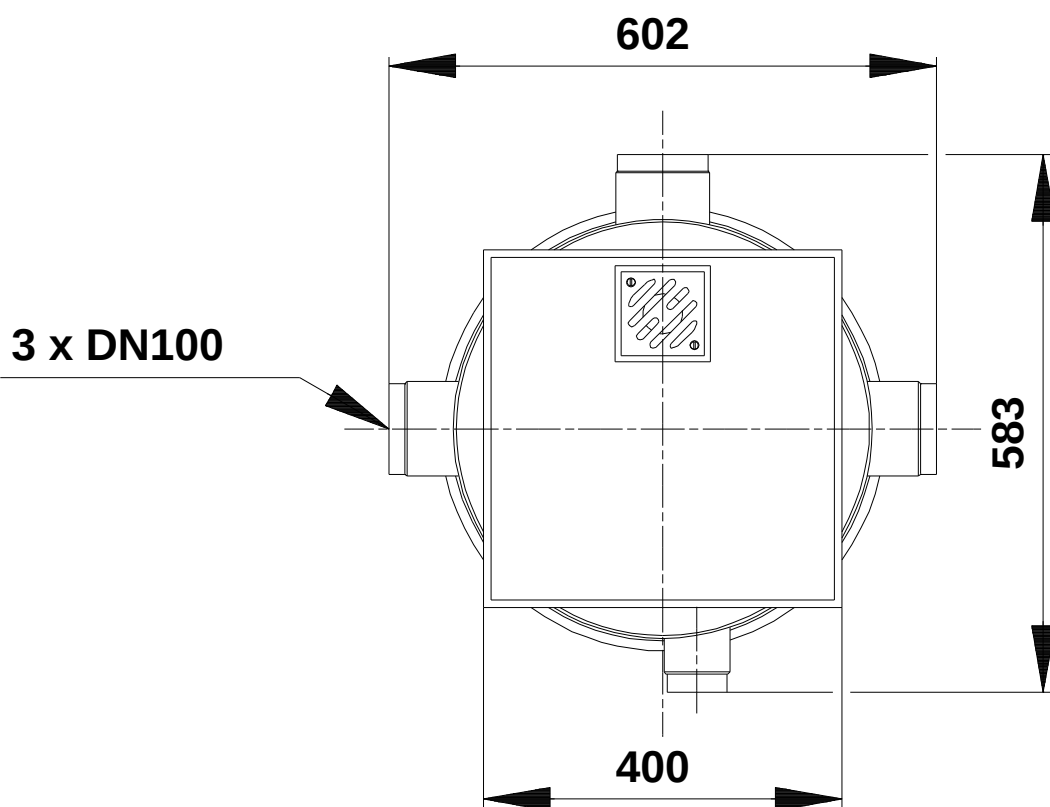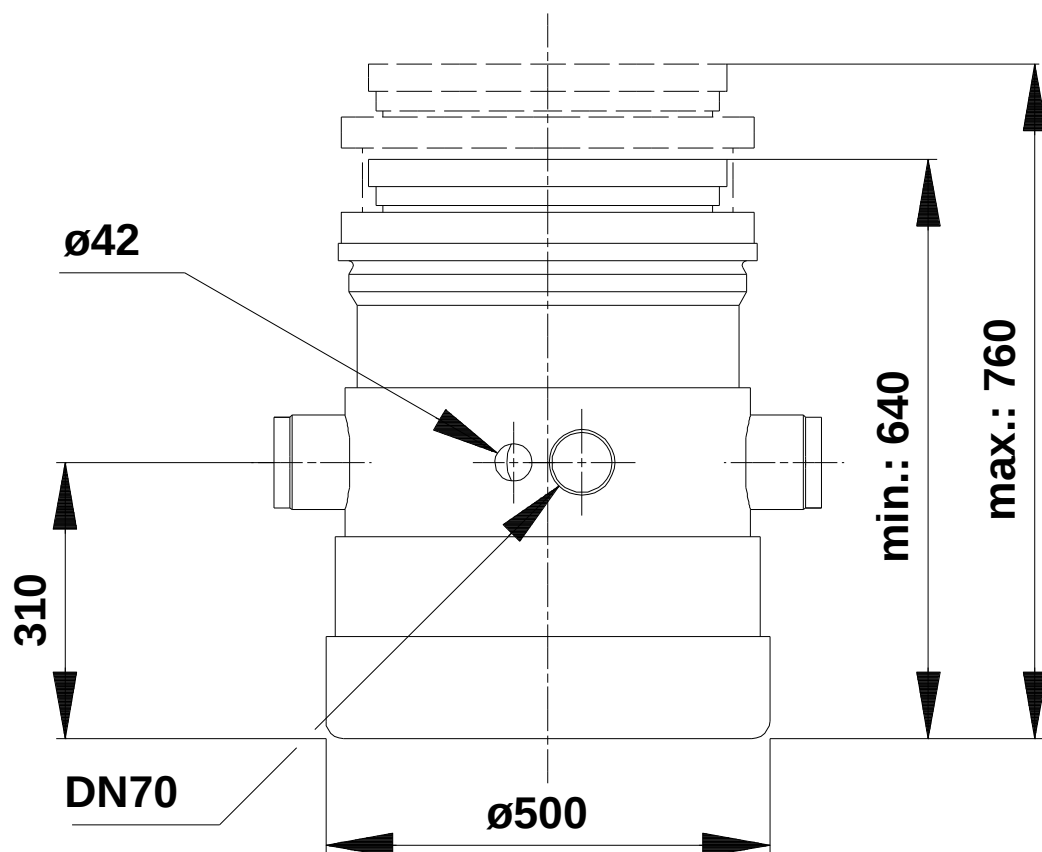


Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Exploded view

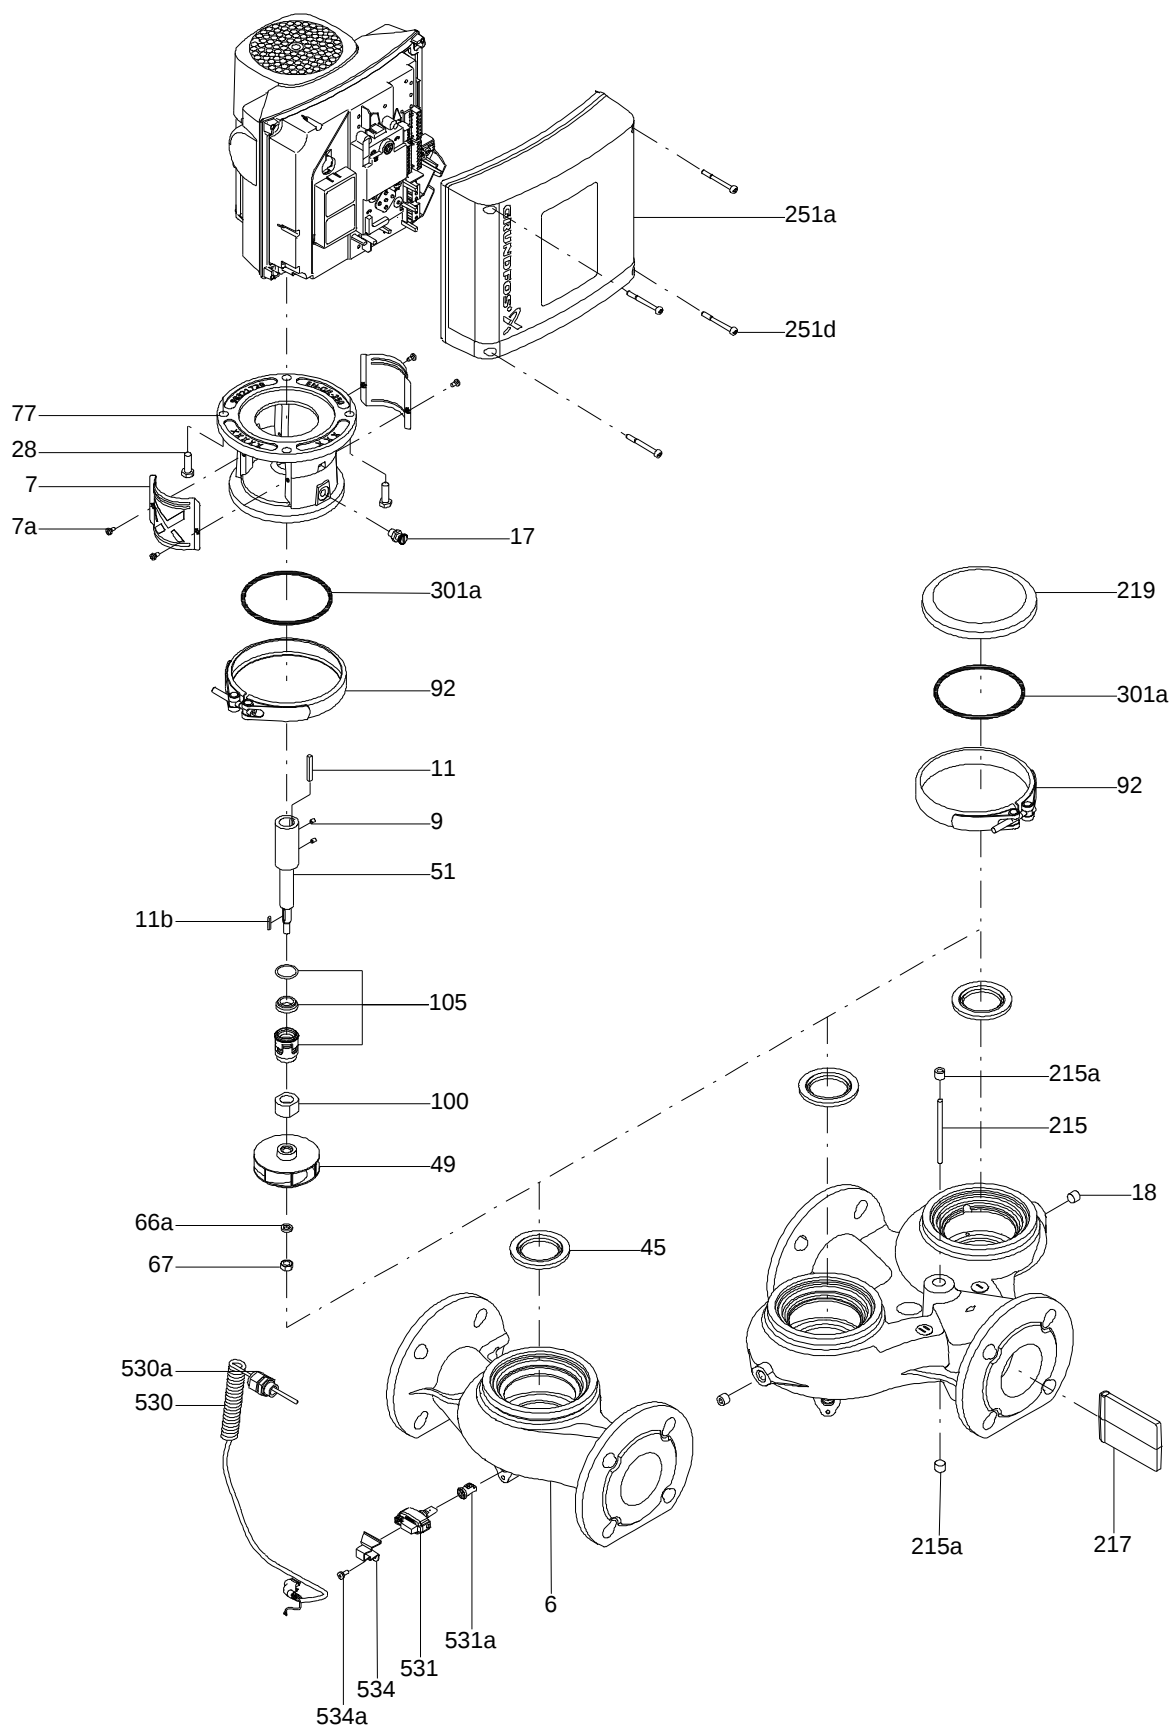


Sectional drawing (TM058200 for TPE2,TPE3)

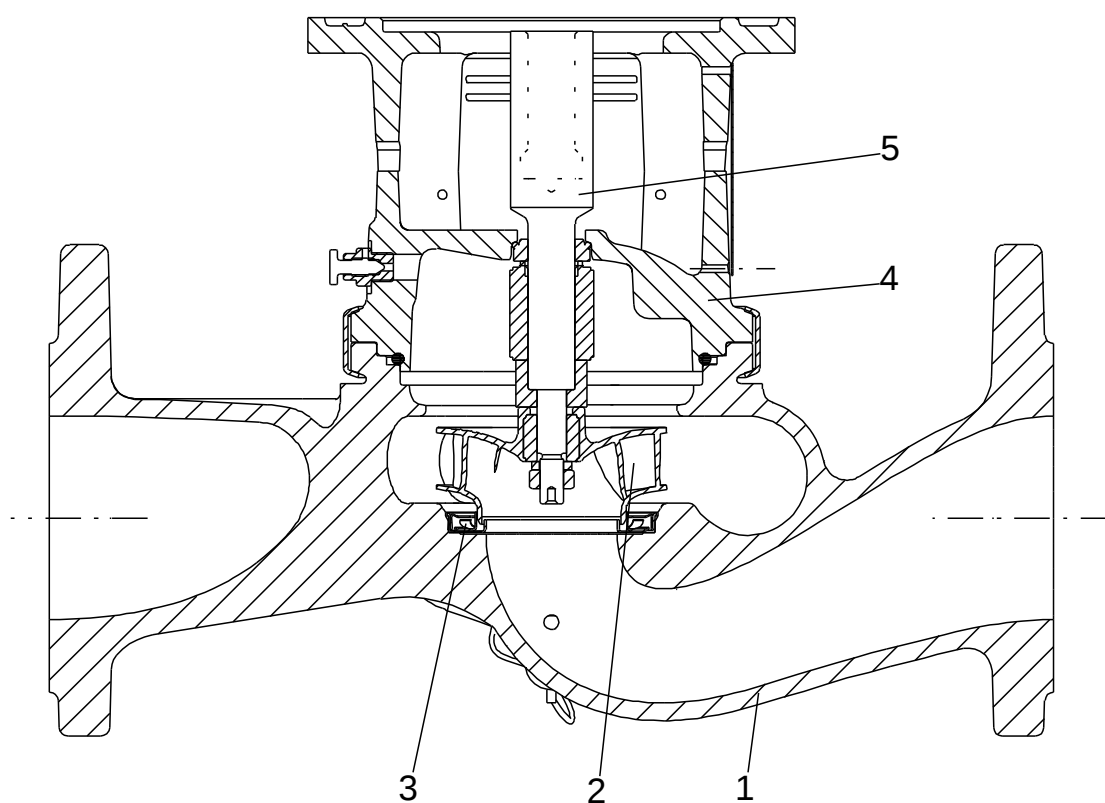

TM058200

Exploded view (TM057026 for MGE model H/I)

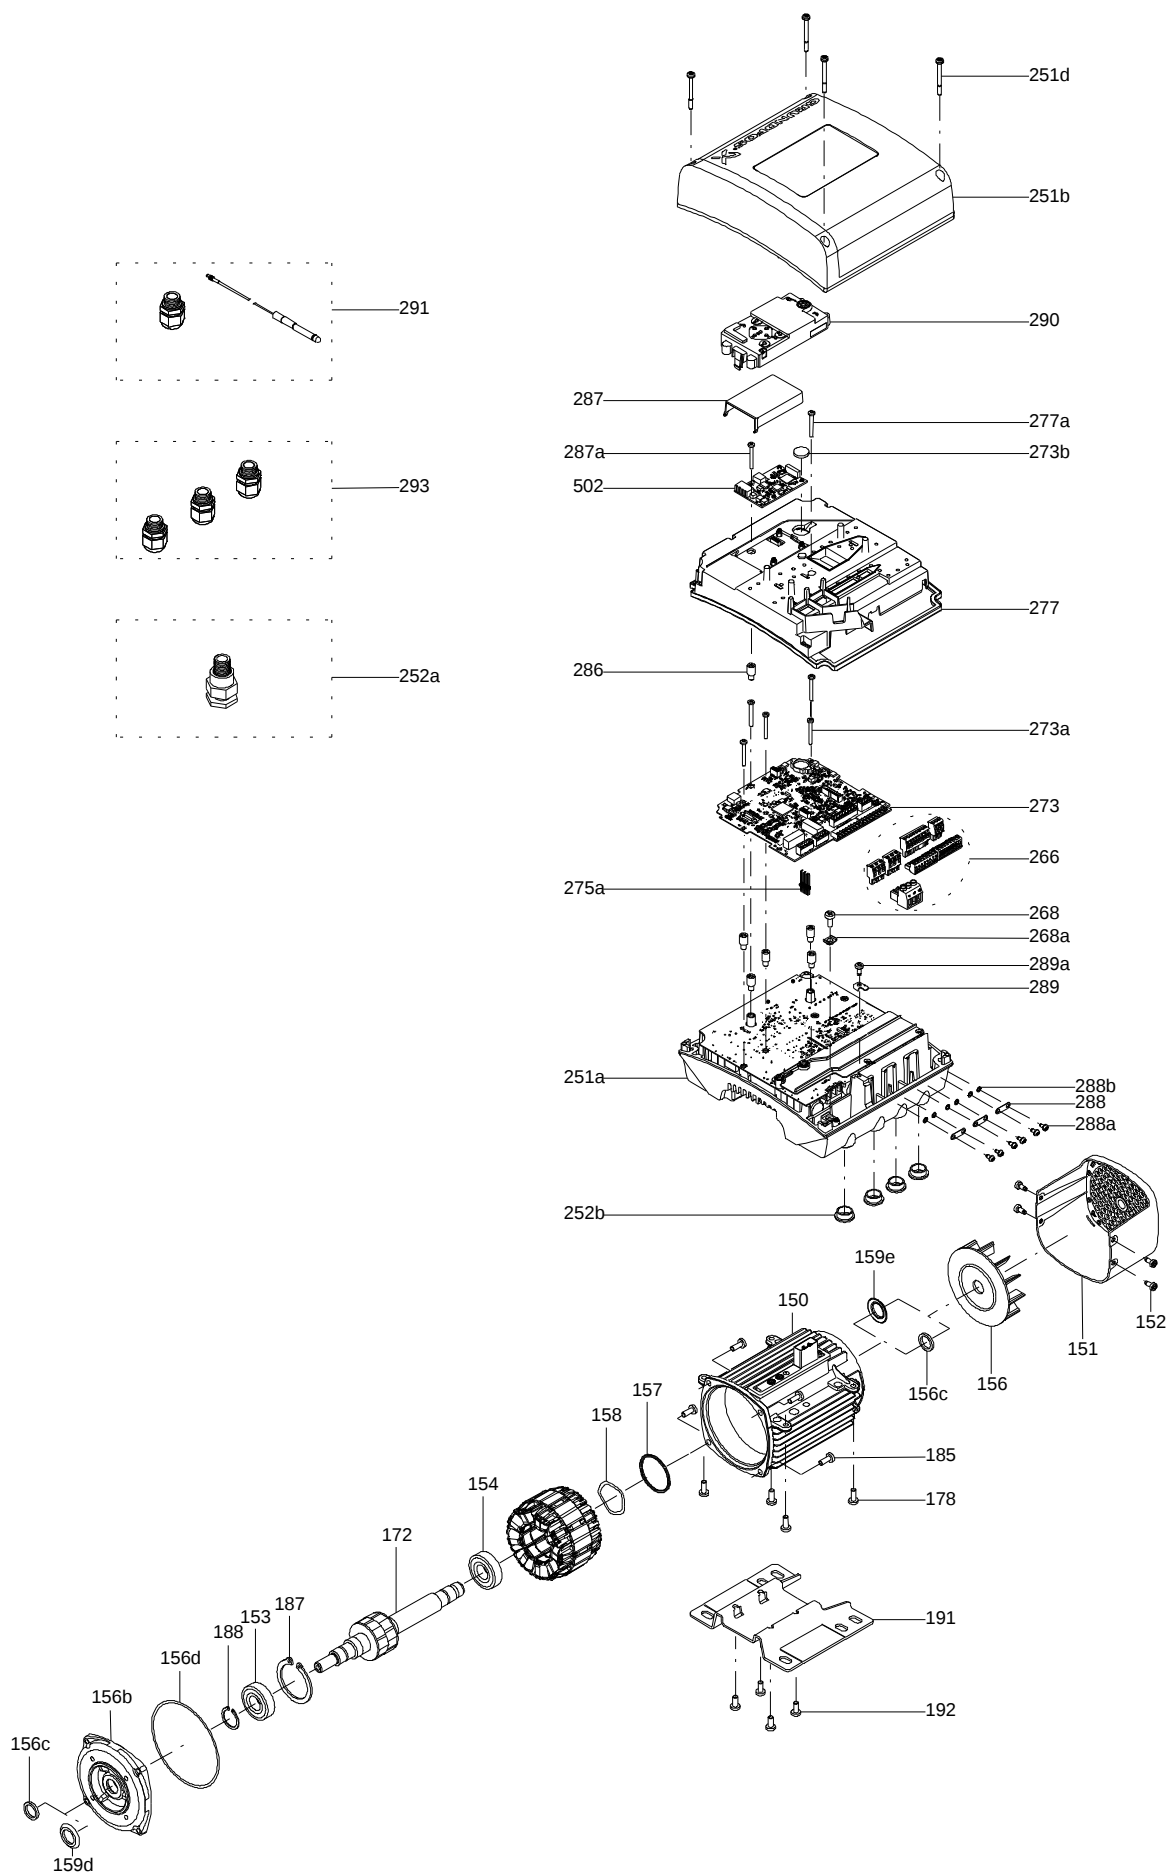

Disclaimer: The information about the Grundfos pump in this document may be outdated.

Data may be subject to alterations without further notice.

Please contact us to verify the data above is still accurate/up-to-date.

All information is copyright Grundfos.



info@lenntech.com

<https://www.lenntech.com>

tel. +31 152 610 900

fax. +31 152 616 289