

TP 150-220/4-A-F-A-BAQE 400D 50HZ

Grundfos pump 96109862



Thank you for your interest in our products. Please contact us for more information, or visit our website

<https://www.lenntech.com/grundfos/TP000/96109862/TP-150-220-4-A-F-A-BAQE.html>

info@lenntech.com

tel. +31 152 610 900


fax. +31 152 616 289

Position	Qty.	Description
	1	TP 150-220/4 A-F-A-BAQE  Product No.: On request Single-stage, close-coupled, volute pump with in-line suction and discharge ports of identical diameter. The pump is of the top-pull-out design, i.e. the power head (motor, pump head and impeller) can be removed for maintenance or service while the pump housing remains in the pipework. The pump is fitted with an unbalanced rubber bellows seal. The shaft seal is according to EN 12756. Pipework connection is via PN 16 DIN flanges (EN 1092-2 and ISO 7005-2). The pump is fitted with a fan-cooled asynchronous motor. Further product details Pump Pump housing and pump head are electrocoated to improve the corrosion resistance. Electrocoating includes: 1) Alkaline-based cleaning. 2) Pretreatment with zinc phosphate coating. 3) Cathodic electrocoating (epoxy). 4) Curing of paint film at 200-250 °C.  1: Pump housing 2: Impeller 3: Stub shaft 4: Pump head/motor stool 5: Wear rings The pump housing is provided with a replaceable brass neck ring to reduce the amount of liquid running from the outlet side of the impeller to the inlet side. The impeller is secured to the shaft with a nut. The pump is fitted with an unbalanced rubber bellows seal with torque transmission across the spring and around the bellows. Due to the bellows, the seal does not wear the shaft, and the axial movement is not prevented by deposits on the shaft. Primary seal: • Rotating seal ring material: carbon graphite, metal-impregnated • Stationary seat material: silicon carbide (SiC) This material pairing has a very good corrosion resistance and is especially suitable for water up to 120 °C. However, seal life will be reduced at temperatures above 90 °C. The material pairing is not recommended for liquids containing particles as this will result in heavy wear on the SiC face. Secondary seal material: EPDM (ethylene-propylene rubber) EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils. A circulation of liquid through the duct of the air vent screw ensures lubrication and cooling of the shaft seal.



Position	Qty.	Description																																												
		The flanges have tappings for mounting of pressure gauges. The motor stool forms connection between the pump housing and the motor, and is equipped with a manual air vent screw for venting of the pump housing and the shaft seal chamber. The sealing between motor stool and pump housing is an O-ring. The central part of the motor stool is provided with guards for protection against the shaft and coupling. The pump shaft is fastened directly on the motor shaft with key and set screws. Motor The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards. Electrical tolerances comply with IEC 60034. The motor is flange-mounted with free-hole flange (FF). Motor-mounting designation in accordance with IEC 60034-7: IM B 5, IM V 1 (Code I) / IM 3001, IM 3011 (Code II). The motor efficiency is classified as IE3 in accordance with IEC 60034-30-1. The motor has thermistors (PTC sensors) in the windings in accordance with DIN 44081/DIN 44082. The protection reacts to both slow- and quick-rising temperatures, e.g. constant overload and stalled conditions. Thermal switches must be connected to an external control circuit in a way which ensures that the automatic reset cannot cause accidents. The motors must be connected to a motor-protective circuit breaker according to local regulations. The motor can be connected to a variable speed drive for adjustment of pump performance to any duty point. Grundfos CUE offers a range of variable speed drives. Please find more information in Grundfos Product Center. Technical data Liquid: <table><tr><td>Pumped liquid:</td><td>Water</td></tr><tr><td>Liquid temperature range:</td><td>0 .. 120 °C</td></tr><tr><td>Liquid temperature during operation:</td><td>20 °C</td></tr><tr><td>Density:</td><td>998.2 kg/m³</td></tr></table> Technical: <table><tr><td>Rated flow:</td><td>278 m³/h</td></tr><tr><td>Rated head:</td><td>18.2 m</td></tr><tr><td>Actual impeller diameter:</td><td>256 mm</td></tr><tr><td>Primary shaft seal:</td><td>BAQE</td></tr><tr><td>Curve tolerance:</td><td>ISO9906:2012 3B</td></tr></table> Materials: <table><tr><td>Pump housing:</td><td>Cast iron EN-JL1040 ASTM A48-40 B</td></tr><tr><td>Impeller:</td><td>Cast iron EN-JL1030 ASTM A48-30 B</td></tr></table> Installation: <table><tr><td>Range of ambient temperature:</td><td>-20 .. 55 °C</td></tr><tr><td>Maximum operating pressure:</td><td>16 bar</td></tr><tr><td>Flange standard:</td><td>DIN</td></tr><tr><td>Pipe connection:</td><td>DN 150</td></tr><tr><td>Pump inlet:</td><td>DN 150</td></tr><tr><td>Pump outlet:</td><td>DN 150</td></tr><tr><td>Pressure rating:</td><td>PN 16</td></tr><tr><td>(@):</td><td>800 mm</td></tr><tr><td>Flange size for motor:</td><td>FF300</td></tr></table> Electrical data: <table><tr><td>Motor type:</td><td>SIEMENS</td></tr><tr><td>IE Efficiency class:</td><td>IE3</td></tr></table>	Pumped liquid:	Water	Liquid temperature range:	0 .. 120 °C	Liquid temperature during operation:	20 °C	Density:	998.2 kg/m³	Rated flow:	278 m³/h	Rated head:	18.2 m	Actual impeller diameter:	256 mm	Primary shaft seal:	BAQE	Curve tolerance:	ISO9906:2012 3B	Pump housing:	Cast iron EN-JL1040 ASTM A48-40 B	Impeller:	Cast iron EN-JL1030 ASTM A48-30 B	Range of ambient temperature:	-20 .. 55 °C	Maximum operating pressure:	16 bar	Flange standard:	DIN	Pipe connection:	DN 150	Pump inlet:	DN 150	Pump outlet:	DN 150	Pressure rating:	PN 16	(@):	800 mm	Flange size for motor:	FF300	Motor type:	SIEMENS	IE Efficiency class:	IE3
Pumped liquid:	Water																																													
Liquid temperature range:	0 .. 120 °C																																													
Liquid temperature during operation:	20 °C																																													
Density:	998.2 kg/m³																																													
Rated flow:	278 m³/h																																													
Rated head:	18.2 m																																													
Actual impeller diameter:	256 mm																																													
Primary shaft seal:	BAQE																																													
Curve tolerance:	ISO9906:2012 3B																																													
Pump housing:	Cast iron EN-JL1040 ASTM A48-40 B																																													
Impeller:	Cast iron EN-JL1030 ASTM A48-30 B																																													
Range of ambient temperature:	-20 .. 55 °C																																													
Maximum operating pressure:	16 bar																																													
Flange standard:	DIN																																													
Pipe connection:	DN 150																																													
Pump inlet:	DN 150																																													
Pump outlet:	DN 150																																													
Pressure rating:	PN 16																																													
(@):	800 mm																																													
Flange size for motor:	FF300																																													
Motor type:	SIEMENS																																													
IE Efficiency class:	IE3																																													

Position	Qty.	Description
		Rated power - P2: 18.5 kW Power (P2) required by pump: 18.5 kW Mains frequency: 50 Hz Rated voltage: 3 x 380-420D/660-725Y V Rated current: 37,0-33,5/21,6-19,6 A Starting current: 690-690 % Cos phi - power factor: 0.82 Rated speed: 1470 rpm Efficiency: IE3 92,6% Motor efficiency at full load: 92.6-92.6 % Motor efficiency at 3/4 load: 93.2-93.2 % Motor efficiency at 1/2 load: 93.2-93.2 % Number of poles: 4 Enclosure class (IEC 34-5): 55 Dust/Jetting Insulation class (IEC 85): F Others: Minimum efficiency index, MEI $\geq$: 0.65 ErP status: EuP Standalone/Prod. Net weight: 378 kg Gross weight: 426 kg Shipping volume: 1.12 m³ Danish VVS No.: 382767221


On request TP 150-220/4 A-F-A-BAQE 50 Hz

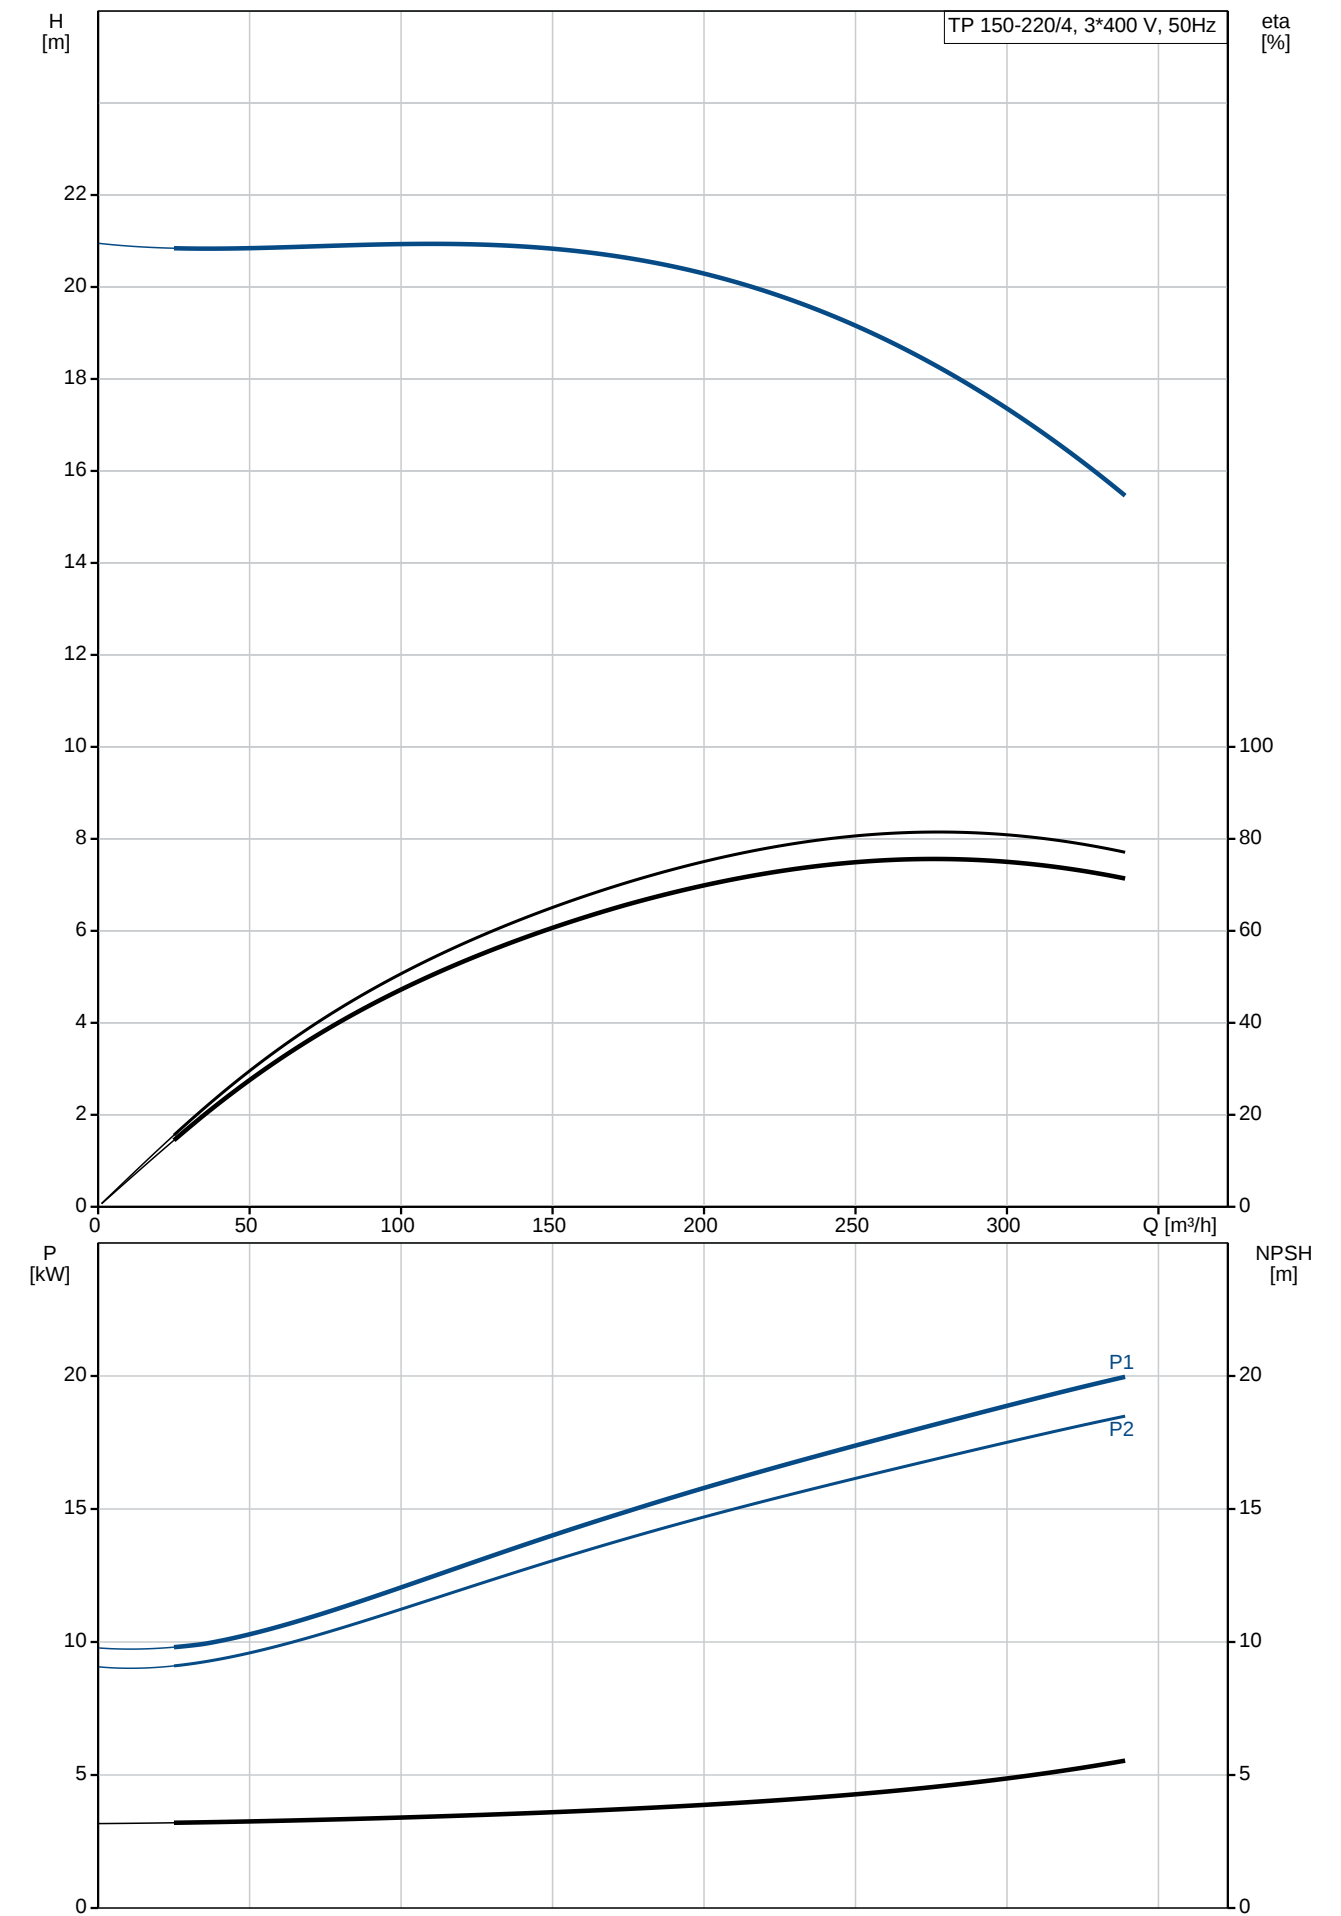

Description	Value
General information:	
Product name:	TP 150-220/4 A-F-A-BAQE
Product No:	On request
EAN number:	On request
Technical:	
Rated flow:	278 m³/h
Rated head:	18.2 m
Head max:	220 dm
Actual impeller diameter:	256 mm
Primary shaft seal:	BAQE
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
Materials:	
Pump housing:	Cast iron
	EN-JL1040
	ASTM A48-40 B
Impeller:	Cast iron
	EN-JL1030
	ASTM A48-30 B
Material code:	A
Installation:	
Range of ambient temperature:	-20 .. 55 °C
Maximum operating pressure:	16 bar
Flange standard:	DIN
Pipe connection:	DN 150
Pump inlet:	DN 150
Pump outlet:	DN 150
Pressure rating:	PN 16
(@)	800 mm
Flange size for motor:	FF300
Connect code:	F
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 120 °C
Liquid temperature during operation:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	SIEMENS
IE Efficiency class:	IE3
Rated power - P2:	18.5 kW
Power (P2) required by pump:	18.5 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-420D/660-725Y V
Rated current:	37,0-33,5/21,6-19,6 A
Starting current:	690-690 %
Cos phi - power factor:	0.82
Rated speed:	1470 rpm
Efficiency:	IE3 92,6%
Motor efficiency at full load:	92.6-92.6 %
Motor efficiency at 3/4 load:	93.2-93.2 %
Motor efficiency at 1/2 load:	93.2-93.2 %
Number of poles:	4
Enclosure class (IEC 34-5):	55 Dust/Jetting
Insulation class (IEC 85):	F
Motor protec:	PTC
Motor No:	99032117
Others:	
Minimum efficiency index, MEI ≥:	0.65
ErP status:	EuP Standalone/Prod.
Net weight:	378 kg
Gross weight:	426 kg
Shipping volume:	1.12 m³
Danish VVS No.:	382767221

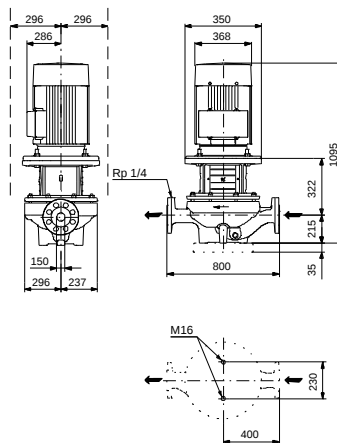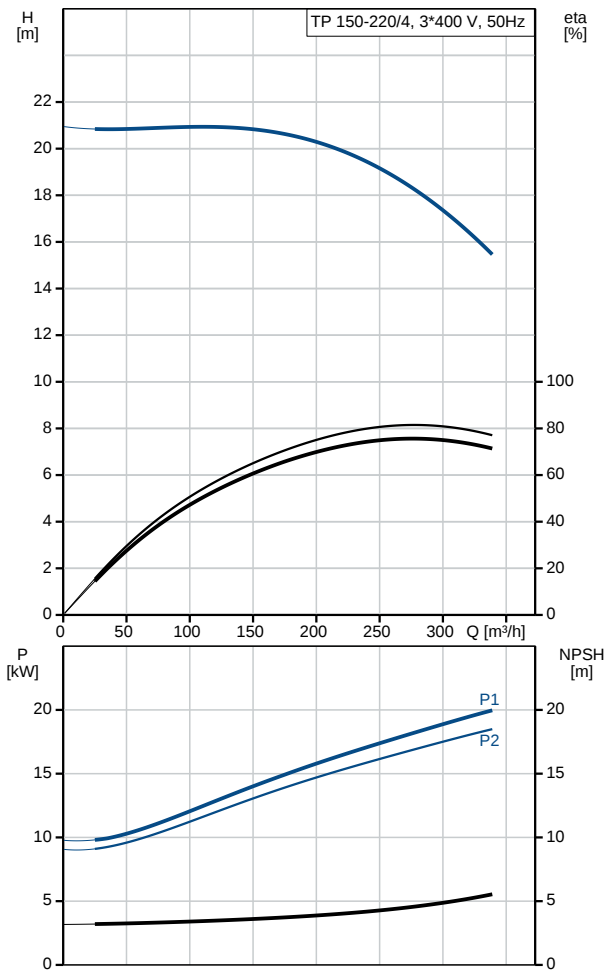

On request TP 150-220/4 A-F-A-BAQE 50 Hz

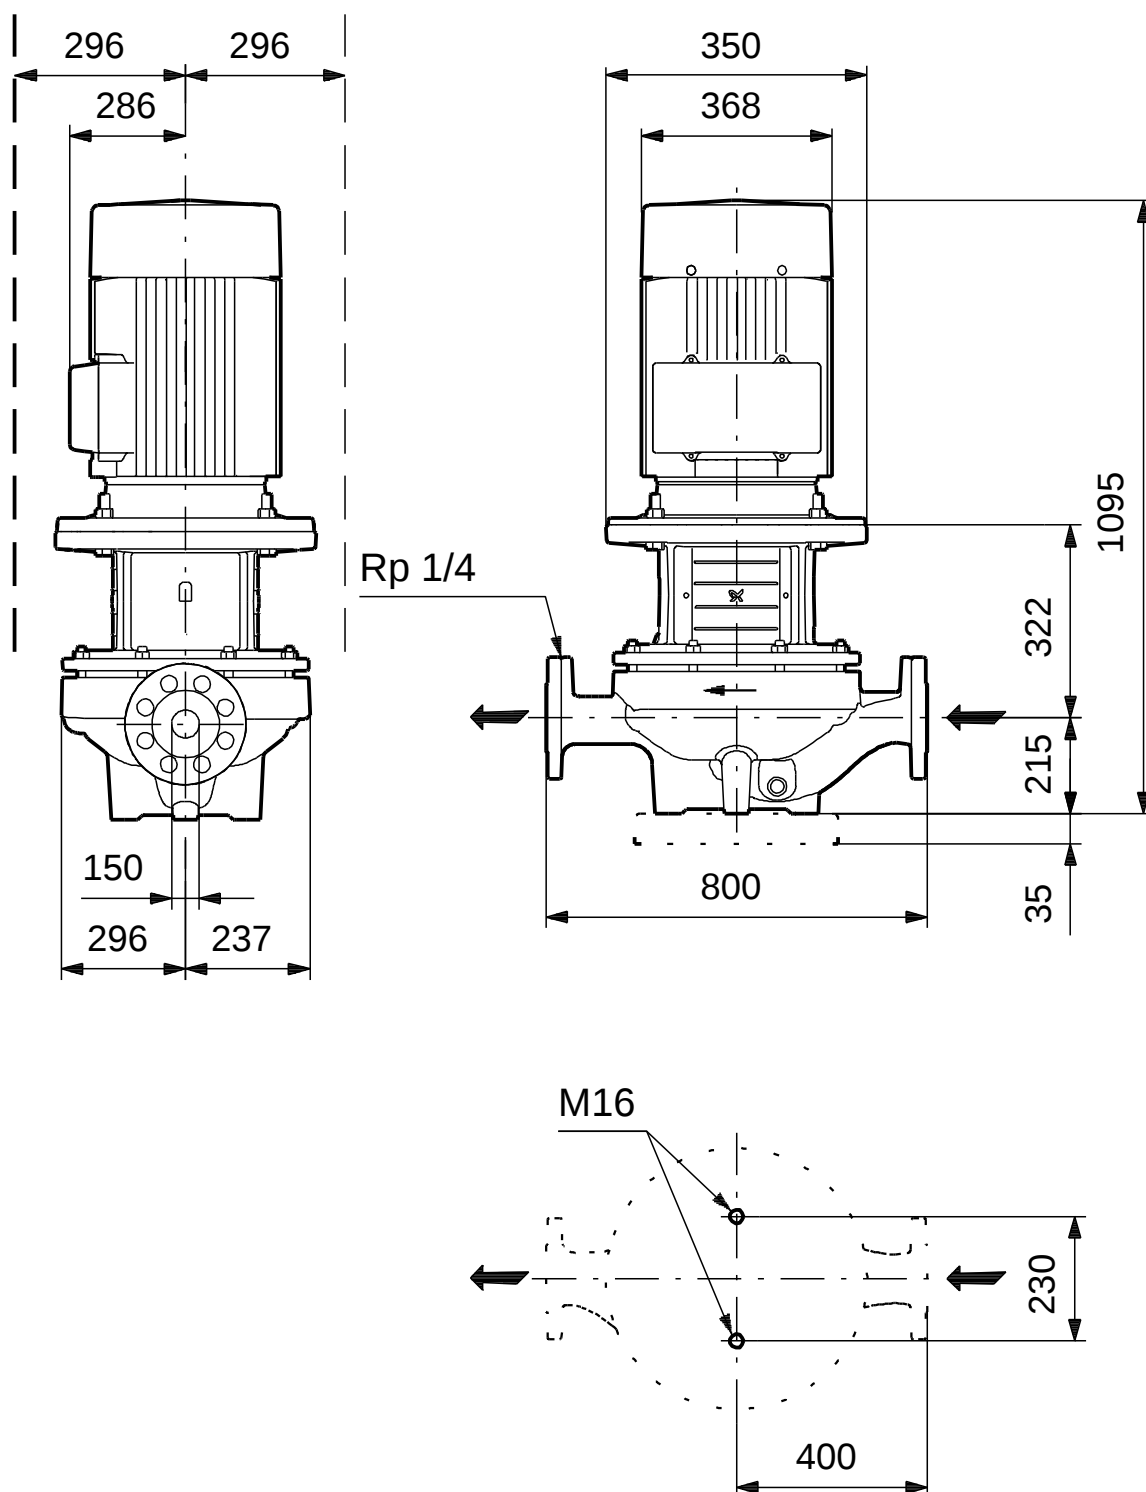

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Exploded view



Sectional drawing (TM058200 for TPE2,TPE3)



TM058200

Exploded view (TM057026 for MGE model H/I)



Parts list TP 150-220/4, Product No. On request
Valid from 19.3.2012 (1212)

Pos	Description	Annotation	Données de classification	Référence	Quantité	Unité
+	Motor				1	pcs
-	Nut				1	pcs
66	Washer		Designation: DIN 125 A2		1	
			Internal diameter: 19			
			Outer diameter: 34			
			Thickness: 3			
66a	Spring lock washer				1	
67	Nut		Thread: M18		1	
-	Motor stool cpl.				1	pcs
1a	Motor stool				1	
7	Coupling guard				2	
77a	Pan head screw				4	
-	Cover cpl.				1	pcs
36	Nut		Thread: M10		8	
77	Cover				1	
-	Pump housing cpl.				1	pcs
6	Pump housing				1	
19	Plug				1	
20	Plug				1	
66a	Nut		Thread: M12		10	
-	Shaft seal cpl.				1	pcs
72.a	O-ring		Diameter: 278,99		1	
			Material type: EPDM			
			Thickness: 3,53			
105	Shaft seal		Material type: BAQE		1	
105b	Spacer				1	
-	Stub shaft				1	pcs
9	Socket set screw		Length (mm): 6		2	
			Thread: M8			
11	Parallel key				1	
51	Pump shaft		Diameter: 32		1	
-	Base plate cpl.				1	pcs
28g	Hex head cap screw		Length (mm): 30 MM		2	
			Thread: M16			
56	Base plate				1	
19	Plug				2	pcs
49	Impeller				1	pcs
105b	Spacer				1	pcs

Disclaimer: The information about the Grundfos pump in this document may be outdated.

Data may be subject to alterations without further notice.

Please contact us to verify the data above is still accurate/up-to-date.

All information is copyright Grundfos.



info@lenntech.com

<https://www.lenntech.com>

tel. +31 152 610 900

fax. +31 152 616 289