

TPD 40-230/2-A-F-A-BUBE 1X230 50HZ

Grundfos Pump 96463843



Thank you for your interest in our products


Please contact us for more information, or visit our website


<https://www.lennotech.com/grundfos/TPD00/96463843/TPD-40-230-2-A-F-A-BUBE.html>

info@lennotech.com

tel. +31-15-261.09.00


fax. +31-15-261.62.89

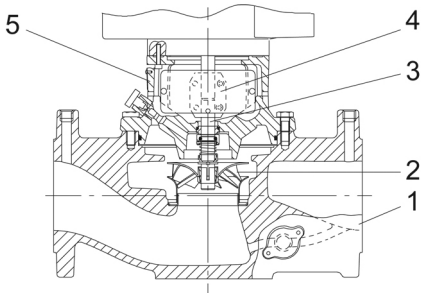Position	Qty.	Description
	1	TPD 40-230/2 A-F-A-BUBE  Product No.: 96463843 Single-stage, close-coupled, volute twin-head pump with in-line suction and discharge ports of identical diameter. The twin-head pump is designed with two parallel power-heads. The pump is of the top-pull-out design, i.e. the power head (motor, pump head and impeller) can be removed for maintenance or service while the pump housing remains in the pipework. Each power head is fitted with an unbalanced rubber bellows seal. The shaft seal is according to EN 12756. Pipework connection is via PN 16 DIN flanges (EN 1092-2 and ISO 7005-2). Each power head is fitted with a fan-cooled asynchronous motor of identical size. Further product details Pump Pump housing and pump head are electrocoated to improve the corrosion resistance. Electrocoating includes: 1) Alkaline-based cleaning. 2) Pretreatment with zinc phosphate coating. 3) Cathodic electrocoating (epoxy). 4) Curing of paint film at 200-250 °C.  1: Pump housing 2: Impeller 3: Shaft 4: Coupling 5: Pump head The twin-head pump is designed with two parallel power-heads. A flap valve in the common discharge port is opened by the flow of the pumped liquid and prevents backflow of liquid into the idle pump head. The pump housing is provided with a replaceable stainless steel/PTFE neck ring to reduce the amount of liquid running from the discharge side of the impeller to the suction side. The impeller is secured with a split cone with nut. The pump is fitted with an unbalanced rubber bellows seal with torque transmission across the spring and around the bellows. Due to the bellows, the seal does not wear the shaft, and the axial movement is not prevented by deposits on the shaft. Primary seal: - Rotating seal ring material: Tungsten carbide (WC) - Stationary seat material: Carbon graphite, resin-impregnated This is a widely used material pairing. If the pumped liquid contains particles, wear on the seal faces must be expected. Due to the favourable lubricating properties of carbon graphite, the seal is suitable for use even under poor lubricating conditions, such as hot water. However, under such conditions, wear on the carbon graphite face reduces seal life. Secondary seal material: EPDM (ethylene-propylene rubber) EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils.




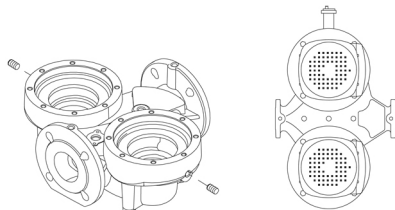
Position	Qty.	Description																																				
		A circulation of liquid through the duct of the air vent screw ensures lubrication and cooling of the shaft seal. The pump housing has two Rp 1/4 tappings for mounting of automatic air vents. Fit an air vent to the upper pump housing if the twin-head pump is to be installed in a horizontal pipeline with horizontal pump shaft.  The flanges have tappings for mounting of pressure gauges. The motor stool forms connection between the pump housing and the motor, and is equipped with a manual air vent screw for venting of the pump housing and the shaft seal chamber. The sealing between motor stool and pump housing is an O-ring. The central part of the motor stool is provided with guards for protection against the shaft and coupling. Motor and pump shaft are connected via a rigid two-part coupling. Motor The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards. Electrical tolerances comply with IEC 60034. The motor is flange-mounted with tapped-hole flange (FT). Motor mounting designation in accordance with IEC 60034-7: IM B 14, IM V 18 (Code I) / IM 3601, IM 3611 (Code II). The motor has built-in thermal protection (PTO current and temperature sensors) in accordance with IEC 60034-11 and requires no further motor protection. The protection reacts to both slow- and quick-rising temperatures, e.g. constant overload and stalled conditions. As the thermal protection incorporates automatic reset, the motor must be connected in a way which ensures that the automatic reset cannot cause accidents. Technical data Liquid: <table><tr><td>Pumped liquid:</td><td>Water</td></tr><tr><td>Liquid temperature range:</td><td>0 .. 140 °C</td></tr><tr><td>Liquid temperature during operation:</td><td>20 °C</td></tr><tr><td>Density:</td><td>998.2 kg/m³</td></tr></table> Technical: <table><tr><td>Speed for pump data:</td><td>2835 rpm</td></tr><tr><td>Rated flow:</td><td>12 m³/h</td></tr><tr><td>Rated head:</td><td>17 m</td></tr><tr><td>Actual impeller diameter:</td><td>138 mm</td></tr><tr><td>Primary shaft seal:</td><td>BUBE</td></tr><tr><td>Curve tolerance:</td><td>ISO9906:2012 3B</td></tr></table> Materials: <table><tr><td>Pump housing:</td><td>Cast iron EN-JL1040 ASTM A48-40 B</td></tr><tr><td>Impeller:</td><td>Stainless steel DIN W.-Nr. 1.4301 AISI 304</td></tr></table> Installation: <table><tr><td>Range of ambient temperature:</td><td>-30 .. 40 °C</td></tr><tr><td>Maximum operating pressure:</td><td>16 bar</td></tr><tr><td>Flange standard:</td><td>DIN</td></tr><tr><td>Pipe connection:</td><td>DN 40</td></tr><tr><td>Pump inlet:</td><td>DN 40</td></tr><tr><td>Pump outlet:</td><td>DN 40</td></tr></table>	Pumped liquid:	Water	Liquid temperature range:	0 .. 140 °C	Liquid temperature during operation:	20 °C	Density:	998.2 kg/m³	Speed for pump data:	2835 rpm	Rated flow:	12 m³/h	Rated head:	17 m	Actual impeller diameter:	138 mm	Primary shaft seal:	BUBE	Curve tolerance:	ISO9906:2012 3B	Pump housing:	Cast iron EN-JL1040 ASTM A48-40 B	Impeller:	Stainless steel DIN W.-Nr. 1.4301 AISI 304	Range of ambient temperature:	-30 .. 40 °C	Maximum operating pressure:	16 bar	Flange standard:	DIN	Pipe connection:	DN 40	Pump inlet:	DN 40	Pump outlet:	DN 40
Pumped liquid:	Water																																					
Liquid temperature range:	0 .. 140 °C																																					
Liquid temperature during operation:	20 °C																																					
Density:	998.2 kg/m³																																					
Speed for pump data:	2835 rpm																																					
Rated flow:	12 m³/h																																					
Rated head:	17 m																																					
Actual impeller diameter:	138 mm																																					
Primary shaft seal:	BUBE																																					
Curve tolerance:	ISO9906:2012 3B																																					
Pump housing:	Cast iron EN-JL1040 ASTM A48-40 B																																					
Impeller:	Stainless steel DIN W.-Nr. 1.4301 AISI 304																																					
Range of ambient temperature:	-30 .. 40 °C																																					
Maximum operating pressure:	16 bar																																					
Flange standard:	DIN																																					
Pipe connection:	DN 40																																					
Pump inlet:	DN 40																																					
Pump outlet:	DN 40																																					

Position	Qty.	Description
		Pressure rating: PN 16 Port-to-port length: 320 mm Flange size for motor: FT115 Electrical data: Motor type: 90SB Rated power - P2: 2 x 1.1 kW Mains frequency: 50 Hz Rated voltage: 1 x 220-230/240 V Rated current: 7,40/6,70 A Starting current: 390 % Cos phi - power factor: 0,98/0,99 Rated speed: 2770 rpm Motor efficiency at full load: 73-71 % Number of poles: 2 Enclosure class (IEC 34-5): 55 Dust/Jetting Insulation class (IEC 85): F Others: Minimum efficiency index, MEI $\geq$ 0.61 ErP status: EuP Standalone/Prod. Net weight: 76.2 kg Gross weight: 82.9 kg Shipping volume: 0.22 m ³


96463843 TPD 40-230/2 50 Hz

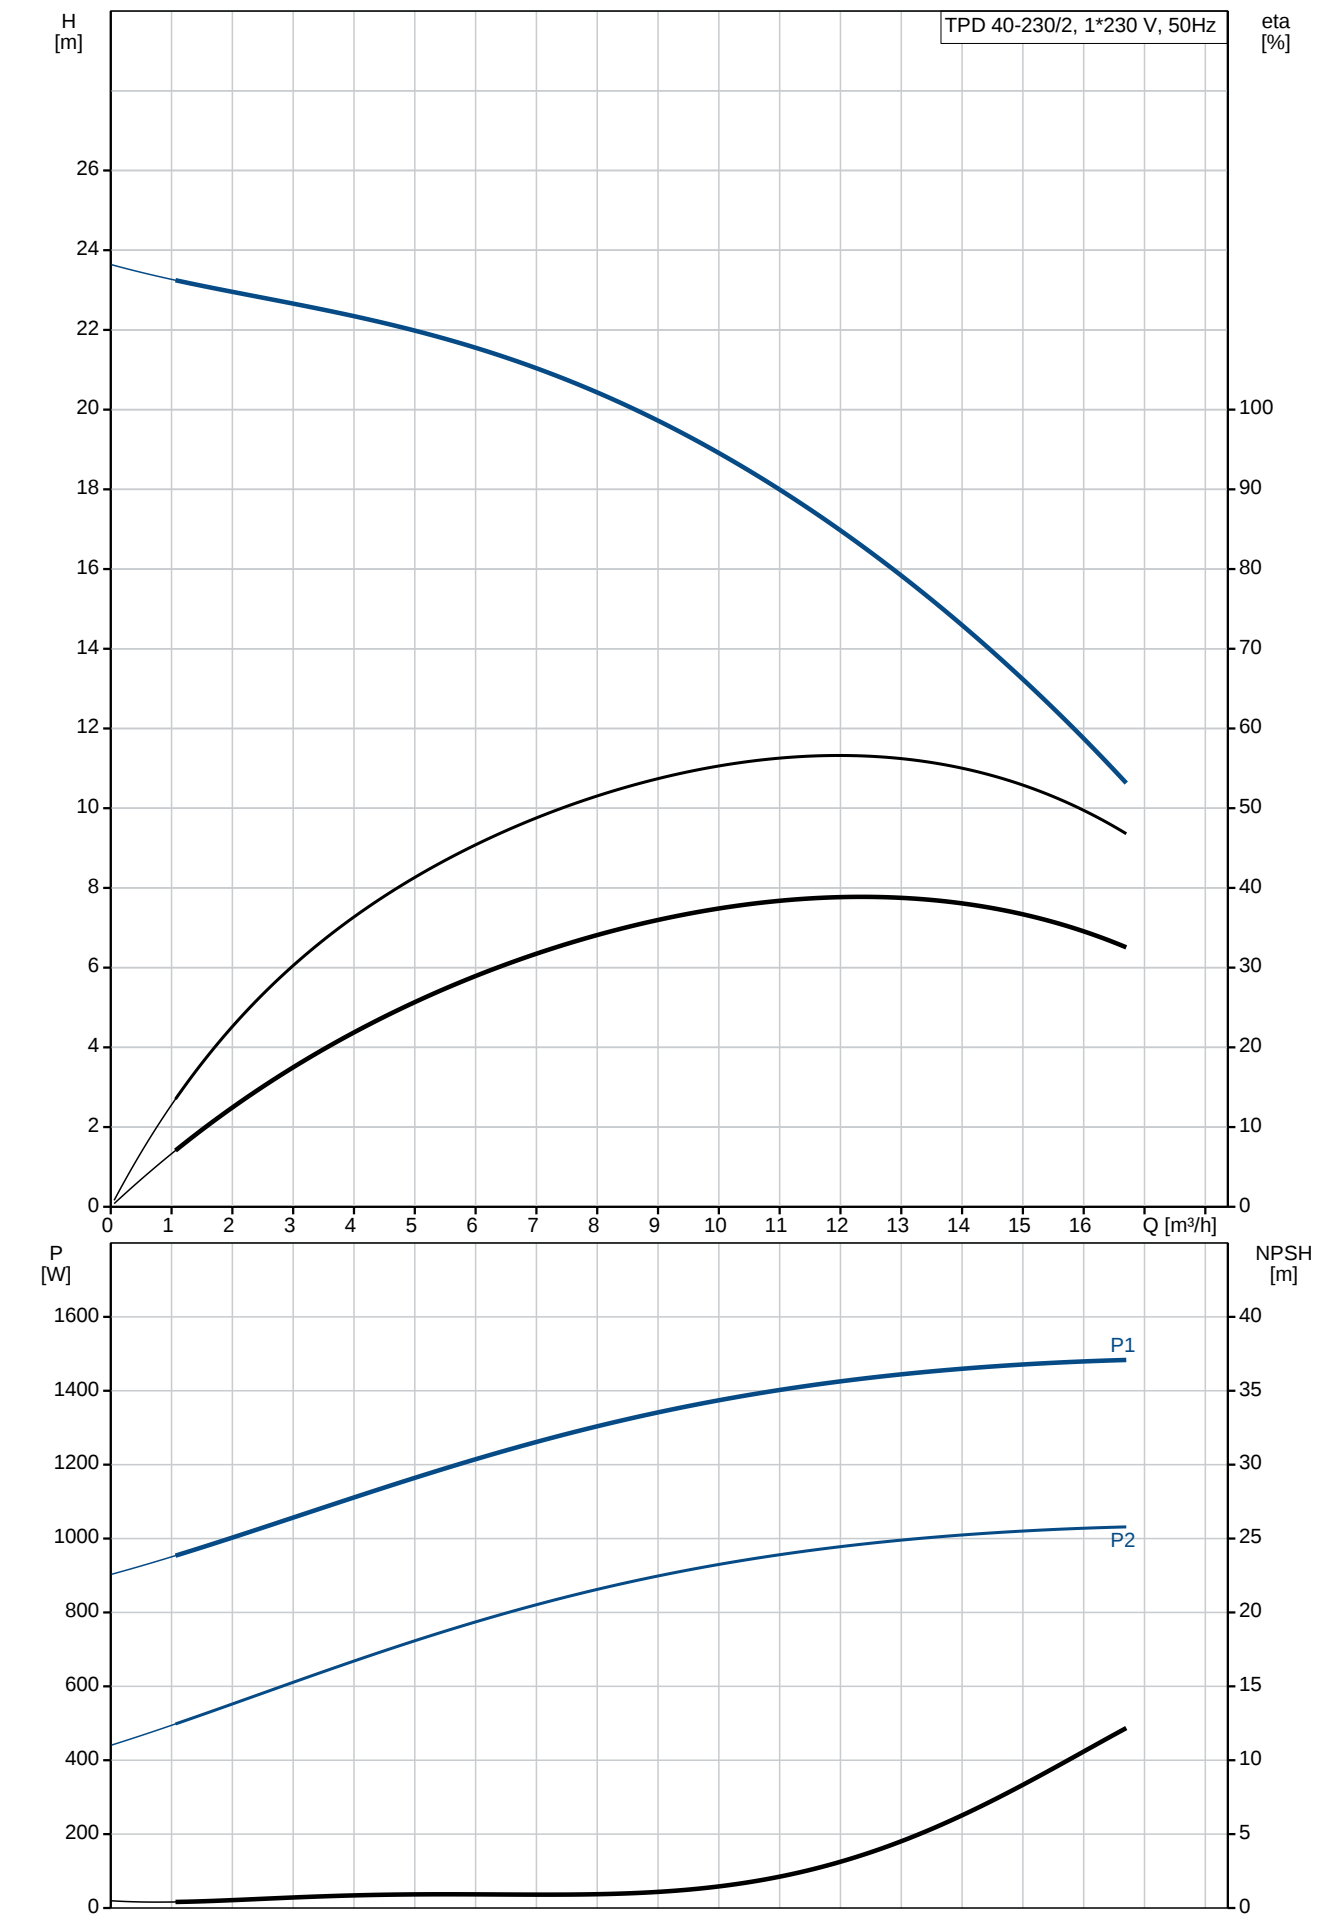




Description	Value
General information:	
Product name:	TPD 40-230/2 A-F-A-BUBE
Product No:	96463843
EAN number:	5700394784108
Technical:	
Speed for pump data:	2835 rpm
Rated flow:	12 m³/h
Rated head:	17 m
Head max:	230 dm
Actual impeller diameter:	138 mm
Primary shaft seal:	BUBE
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
Materials:	
Pump housing:	Cast iron
	EN-JL1040
	ASTM A48-40 B
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Material code:	A
Installation:	
Range of ambient temperature:	-30 .. 40 °C
Maximum operating pressure:	16 bar
Flange standard:	DIN
Connect code:	F
Pipe connection:	DN 40
Pump inlet:	DN 40
Pump outlet:	DN 40
Pressure rating:	PN 16
Port-to-port length:	320 mm
Flange size for motor:	FT115
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 140 °C
Liquid temperature during operation:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	90SB
Rated power - P2:	2 x 1.1 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 220-230/240 V
Rated current:	7,40/6,70 A
Starting current:	390 %
Cos phi - power factor:	0,98/0,99
Rated speed:	2770 rpm
Motor efficiency at full load:	73-71 %
Number of poles:	2
Enclosure class (IEC 34-5):	55 Dust/Jetting
Insulation class (IEC 85):	F
Motor protec:	PTO
Motor No:	85215705
Others:	
Minimum efficiency index, MEI ≥:	0.61
ErP status:	EuP Standalone/Prod.
Net weight:	76.2 kg
Gross weight:	82.9 kg
Shipping volume:	0.22 m³

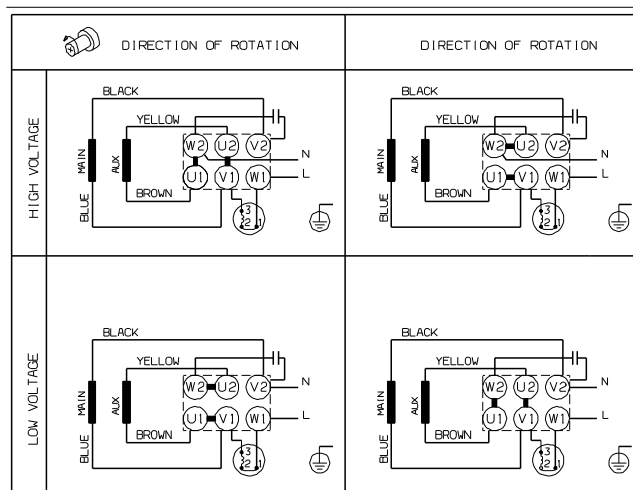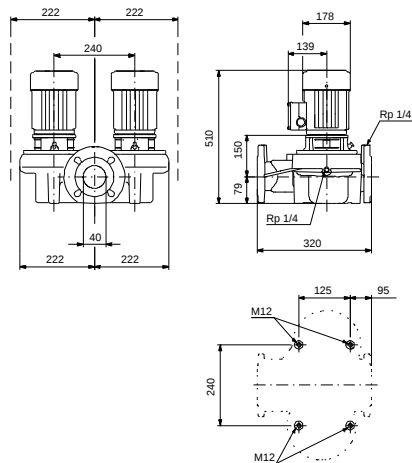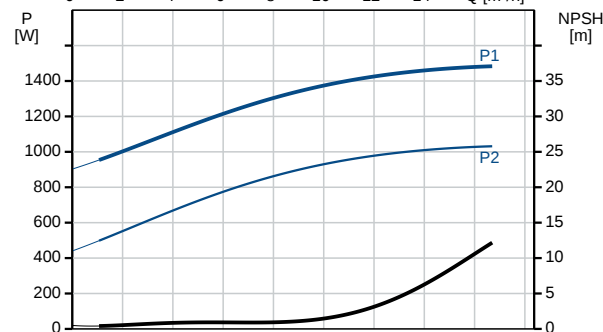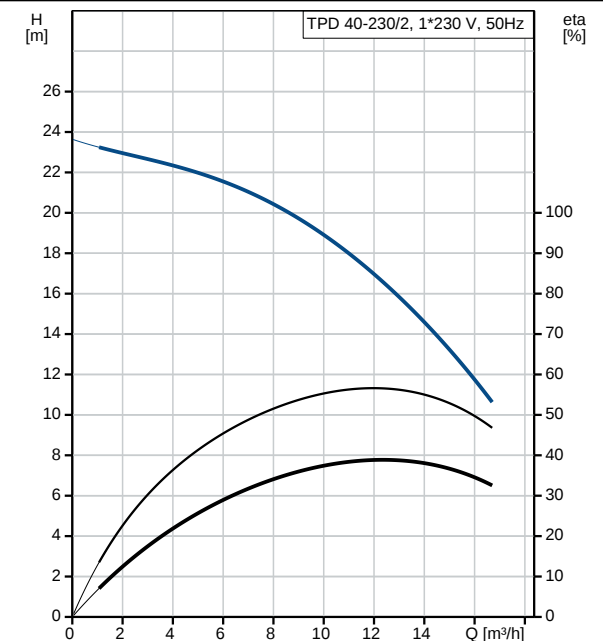



96463843 TPD 40-230/2 50 Hz

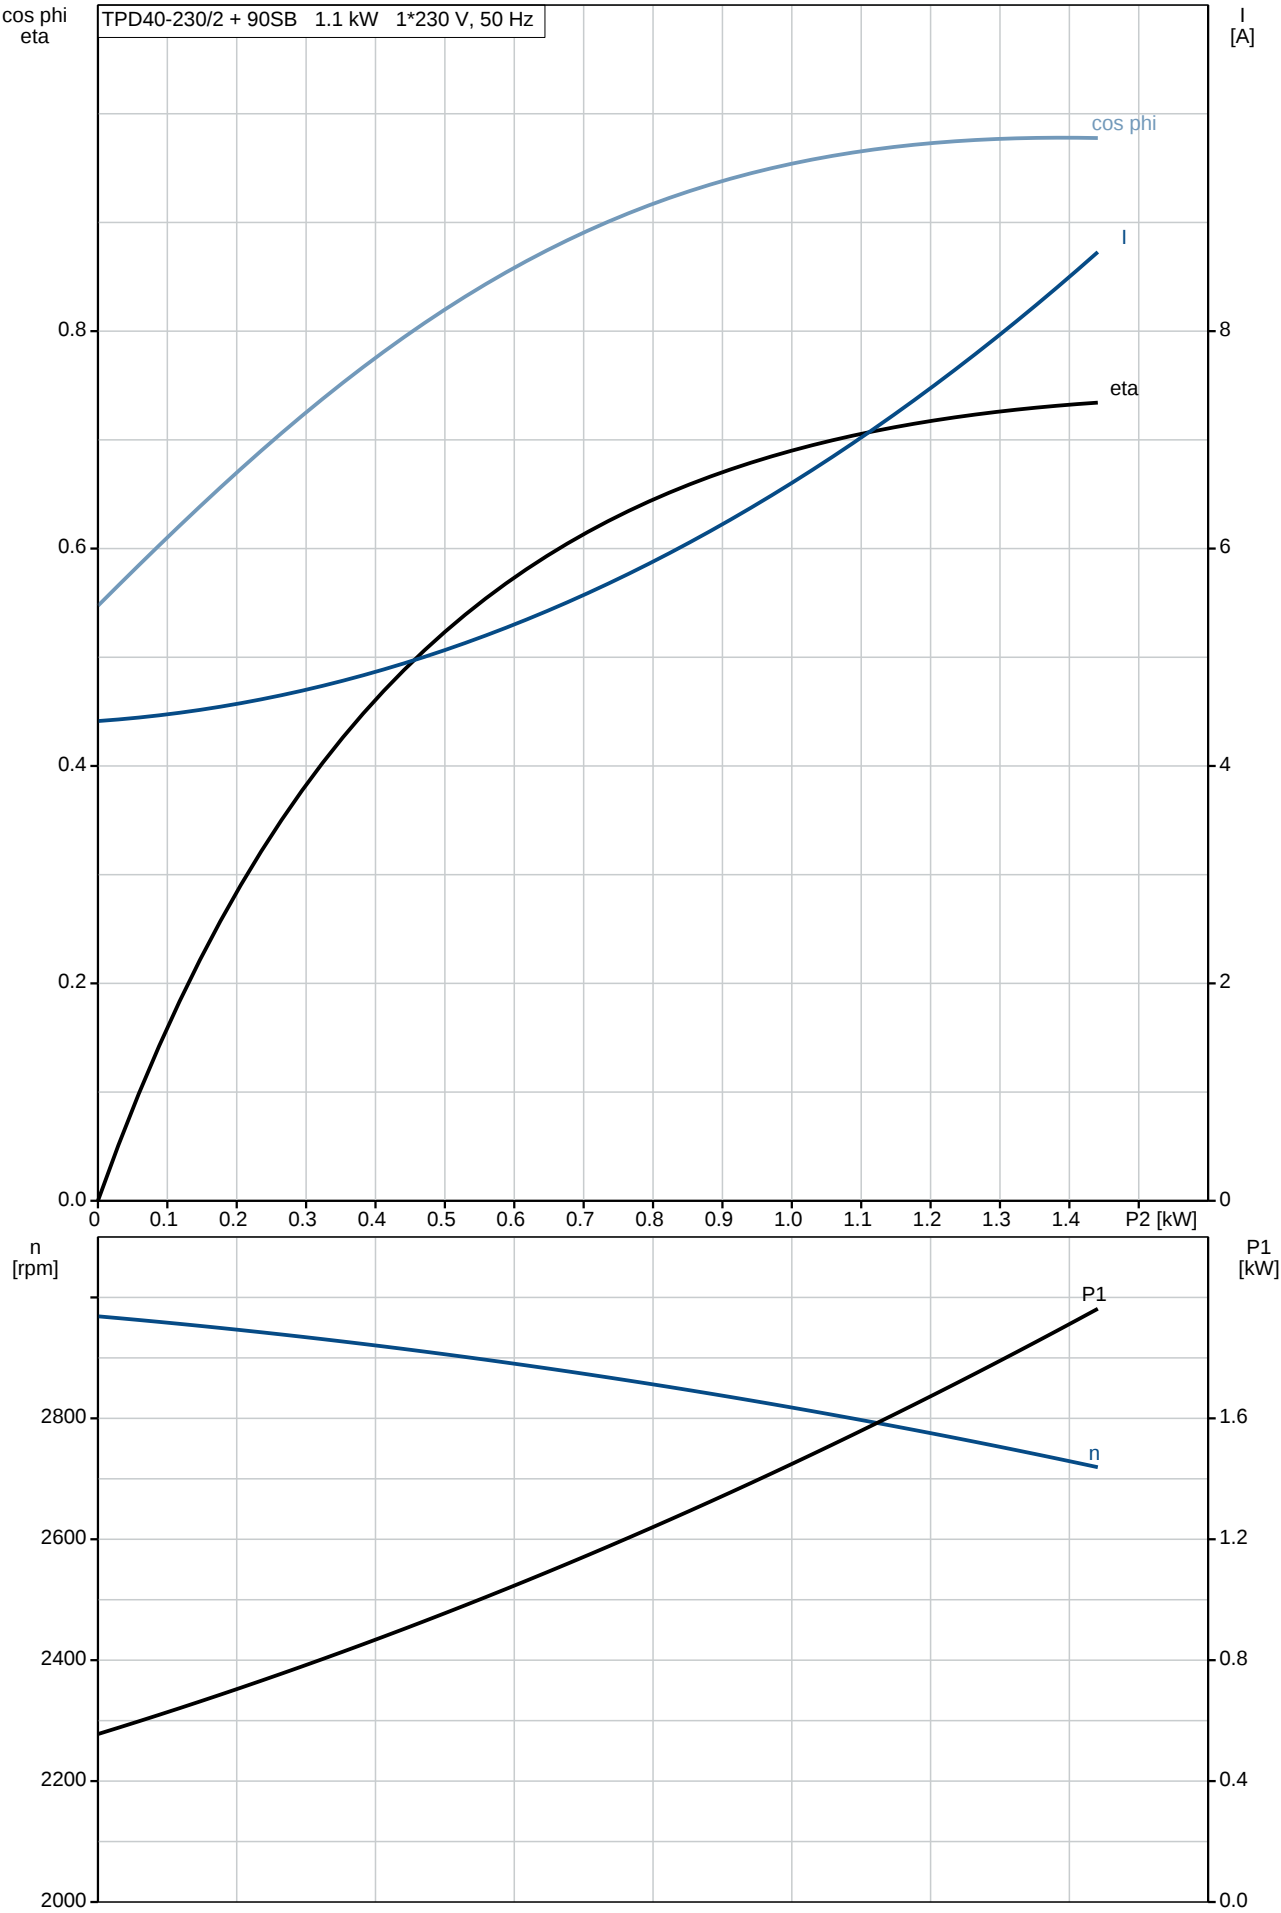

96463843 TPD 40-230/2 50 Hz

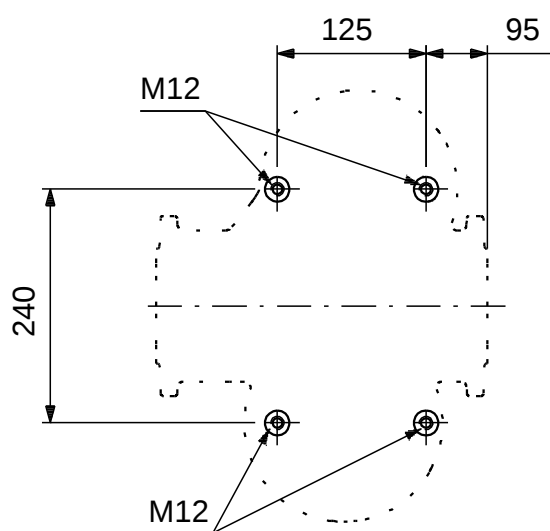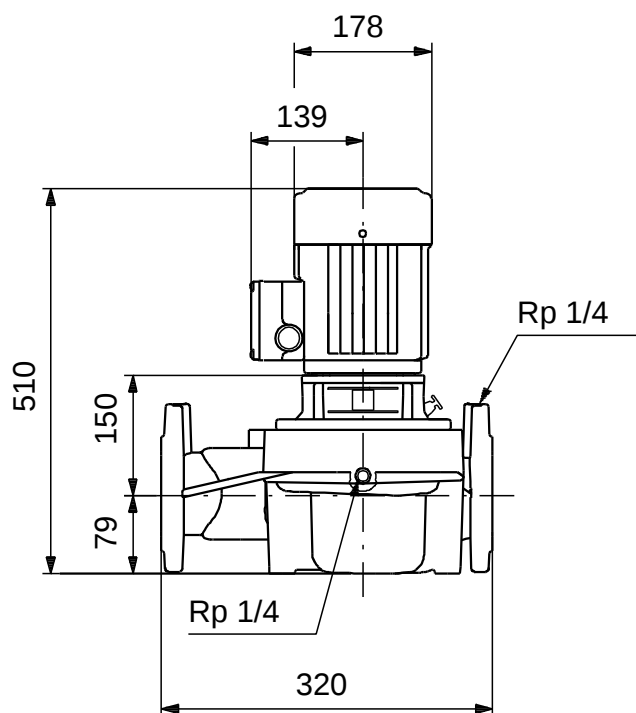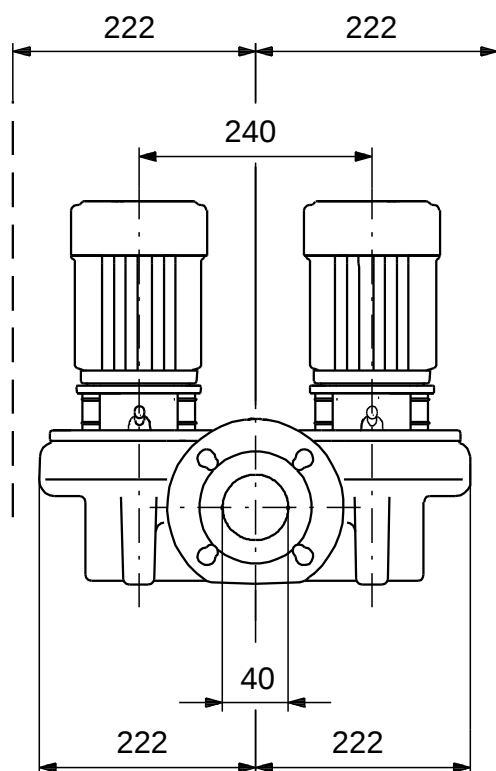

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

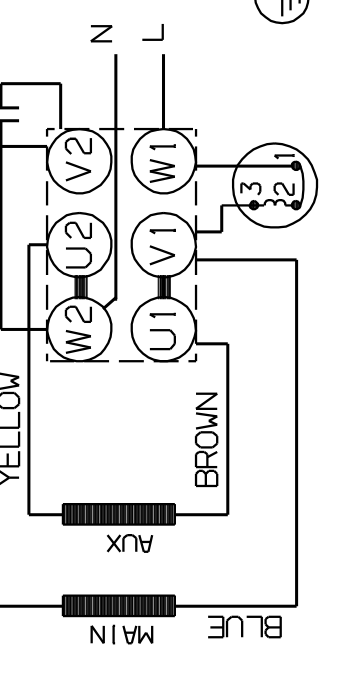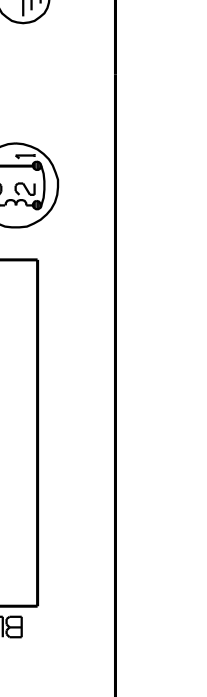	DIRECTION OF ROTATION
DIRECTION OF ROTATION	DIRECTION OF ROTATION
	HIGH VOLTAGE
	LOW VOLTAGE

Note! All units are in [mm] unless others are stated.

*Disclaimer: The information about the Grundfos pump in this document may be outdated.
Data may be subject to alterations without further notice.
Please contact us to verify the data above is still accurate/up-to-date.*

All information is copyright Grundfos.



info@lenntech.com

www.lenntech.com

tel. +31-15-261.09.00

fax. +31-15-261.62.89