

SQE 3- 65 1.05kW 200-240V 50/60Hz

Grundfos pump 96510159



Thank you for your interest in our products. Please contact us for more information, or visit our website

<https://www.lenntech.com/grundfos/SQEC03/96510159/SQE-3-65.html>

info@lenntech.com



tel. +31 152 610 900

fax. +31 152 616 289





Position	Qty.	Description																																																						
	1	 Note! Product picture may differ from actual product Product No.: On request 3" multi-stage, submersible pump designed for domestic water supply, liquid transfer in tanks, irrigation and environmental applications. The pump has "floating" impellers, each with its own tungsten carbide/ceramic bearing. The pump features soft starting and protection against dry-running, upthrust, overvoltage, undervoltage, overload and overtemperature. The motor is a single-phase motor of the permanent magnet rotor type ensuring optimum efficiency within a wide load range. The motor is fitted with a replaceable end cover with socket. Liquid: <table><tr><td>Pumped liquid:</td><td>Water</td></tr><tr><td>Maximum liquid temperature:</td><td>35 °C</td></tr><tr><td>Max liquid t at 0.15 m/sec:</td><td>35 °C</td></tr><tr><td>Liquid temperature during operation:</td><td>20 °C</td></tr><tr><td>Density:</td><td>998.2 kg/m³</td></tr></table> Technical: <table><tr><td>Rated flow:</td><td>3 m³/h</td></tr><tr><td>Rated head:</td><td>70 m</td></tr><tr><td>Approvals on motor nameplate:</td><td>CE,UL,CUL</td></tr><tr><td>Curve tolerance:</td><td>ISO9906:2012 3B</td></tr></table> Materials: <table><tr><td>Pump:</td><td>Polyamide / Stainless steel</td></tr><tr><td></td><td>DIN W.-Nr. 1.4301</td></tr><tr><td></td><td>AISI 304</td></tr><tr><td>Impeller:</td><td>Polyamide</td></tr><tr><td>Motor:</td><td>Stainless steel</td></tr><tr><td></td><td>DIN W.-Nr. 1.4301</td></tr><tr><td></td><td>AISI 304</td></tr></table> Installation: <table><tr><td>Pump outlet:</td><td>Rp 1 1/4</td></tr><tr><td>Minimum borehole diameter:</td><td>76 mm</td></tr></table> Electrical data: <table><tr><td>Motor type:</td><td>MSE3</td></tr><tr><td>Power input - P1:</td><td>1.65 kW</td></tr><tr><td>Rated power - P2:</td><td>1.15 kW</td></tr><tr><td>Mains frequency:</td><td>50 Hz</td></tr><tr><td>Rated voltage:</td><td>1 x 200-240 V</td></tr><tr><td>Rated current:</td><td>8.4 A</td></tr><tr><td>Power factor:</td><td>1.00</td></tr><tr><td>Rated speed:</td><td>10700 rpm</td></tr><tr><td>Start. method:</td><td>direct-on-line</td></tr></table>	Pumped liquid:	Water	Maximum liquid temperature:	35 °C	Max liquid t at 0.15 m/sec:	35 °C	Liquid temperature during operation:	20 °C	Density:	998.2 kg/m³	Rated flow:	3 m³/h	Rated head:	70 m	Approvals on motor nameplate:	CE,UL,CUL	Curve tolerance:	ISO9906:2012 3B	Pump:	Polyamide / Stainless steel		DIN W.-Nr. 1.4301		AISI 304	Impeller:	Polyamide	Motor:	Stainless steel		DIN W.-Nr. 1.4301		AISI 304	Pump outlet:	Rp 1 1/4	Minimum borehole diameter:	76 mm	Motor type:	MSE3	Power input - P1:	1.65 kW	Rated power - P2:	1.15 kW	Mains frequency:	50 Hz	Rated voltage:	1 x 200-240 V	Rated current:	8.4 A	Power factor:	1.00	Rated speed:	10700 rpm	Start. method:	direct-on-line
Pumped liquid:	Water																																																							
Maximum liquid temperature:	35 °C																																																							
Max liquid t at 0.15 m/sec:	35 °C																																																							
Liquid temperature during operation:	20 °C																																																							
Density:	998.2 kg/m³																																																							
Rated flow:	3 m³/h																																																							
Rated head:	70 m																																																							
Approvals on motor nameplate:	CE,UL,CUL																																																							
Curve tolerance:	ISO9906:2012 3B																																																							
Pump:	Polyamide / Stainless steel																																																							
	DIN W.-Nr. 1.4301																																																							
	AISI 304																																																							
Impeller:	Polyamide																																																							
Motor:	Stainless steel																																																							
	DIN W.-Nr. 1.4301																																																							
	AISI 304																																																							
Pump outlet:	Rp 1 1/4																																																							
Minimum borehole diameter:	76 mm																																																							
Motor type:	MSE3																																																							
Power input - P1:	1.65 kW																																																							
Rated power - P2:	1.15 kW																																																							
Mains frequency:	50 Hz																																																							
Rated voltage:	1 x 200-240 V																																																							
Rated current:	8.4 A																																																							
Power factor:	1.00																																																							
Rated speed:	10700 rpm																																																							
Start. method:	direct-on-line																																																							

Position	Qty.	Description
		Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): F Length of cable: 1.5 m Others: Net weight: 6.6 kg Gross weight: 6.5 kg Shipping volume: 0.01 m ³ Danish VVS No.: 388443465 Swedish RSK No.: 5853378


On request SQE 3-65 50 Hz

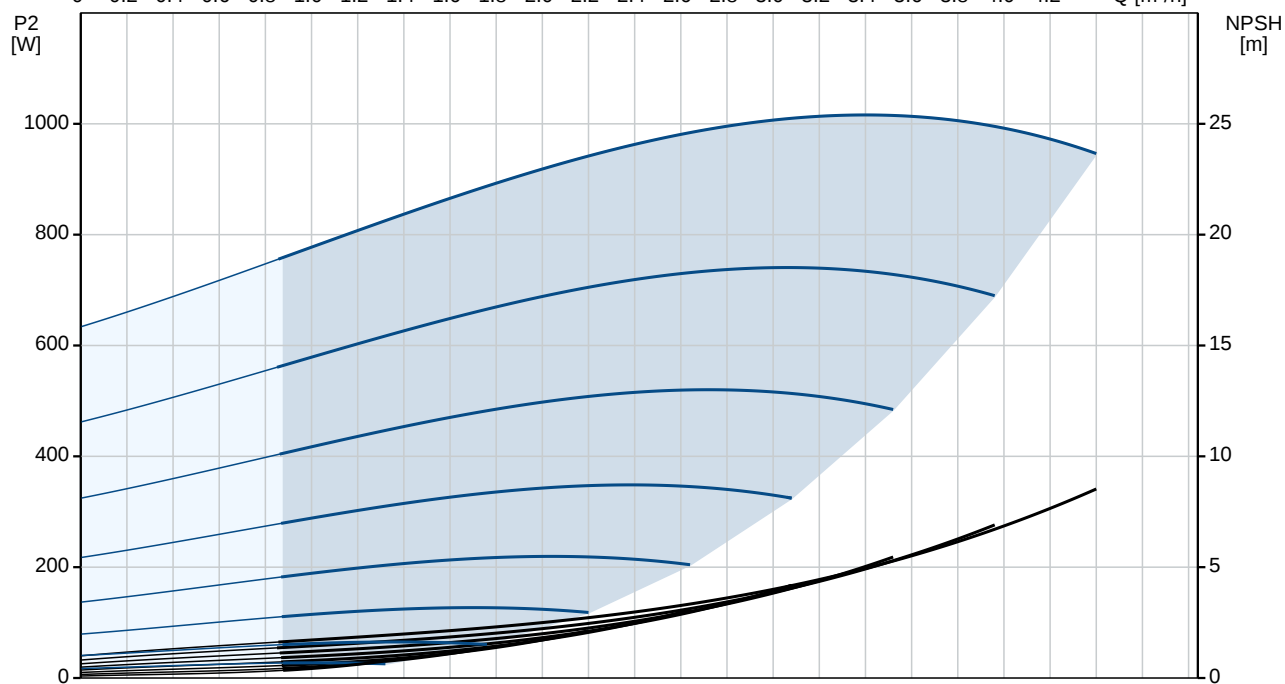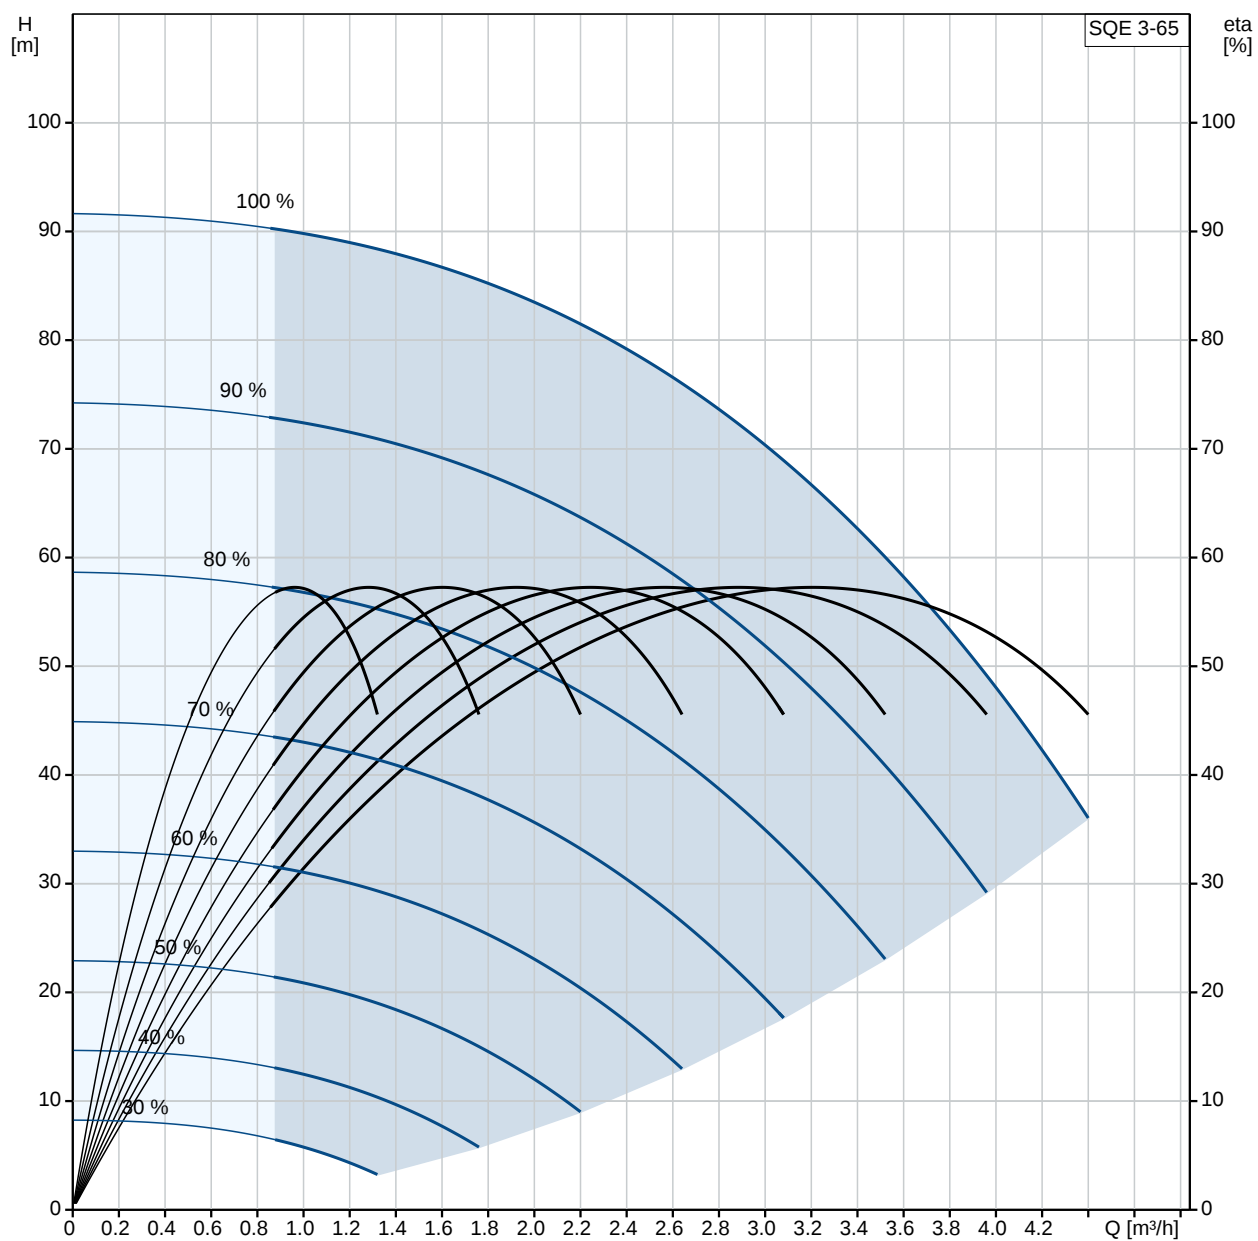

Description	Value
General information:	
Product name:	SQE 3-65
Product No:	On request
EAN number:	On request
Technical:	
Rated flow:	3 m³/h
Rated head:	70 m
Stages:	5
Approvals on motor nameplate:	CE,UL,CUL
Curve tolerance:	ISO9906:2012 3B
Pump No:	96080397
Model:	B
Valve:	pump with built-in non-return valve
Materials:	
Pump:	Polyamide / Stainless steel DIN W.-Nr. 1.4301 AISI 304
Impeller:	Polyamide
Motor:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
Installation:	
Pump outlet:	Rp 1 1/4
Minimum borehole diameter:	76 mm
Liquid:	
Pumped liquid:	Water
Maximum liquid temperature:	35 °C
Max liquid t at 0.15 m/sec:	35 °C
Liquid temperature during operation:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	MSE3
Power input - P1:	1.65 kW
Rated power - P2:	1.15 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 200-240 V
Rated current:	8.4 A
Power factor:	1.00
Rated speed:	10700 rpm
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Motor protec:	Y
Thermal protec:	internal
Length of cable:	1.5 m
Motor No:	96160855
Controls:	
CU 300/CU 301:	communication with CU 300/CU 301 possible
Others:	
Net weight:	6.6 kg
Gross weight:	6.5 kg
Shipping volume:	0.01 m³
Sales region:	EU/S-AMREG/APREG
Danish VVS No.:	388443465
Swedish RSK No.:	5853378

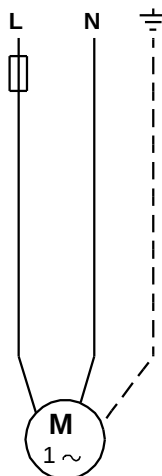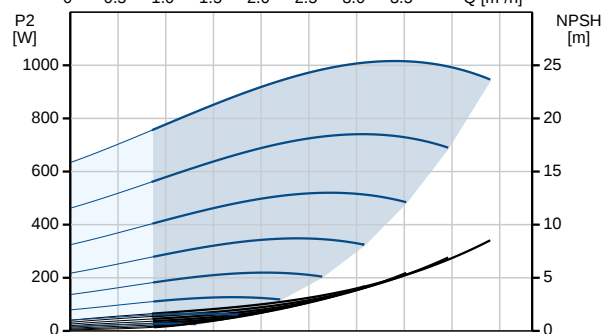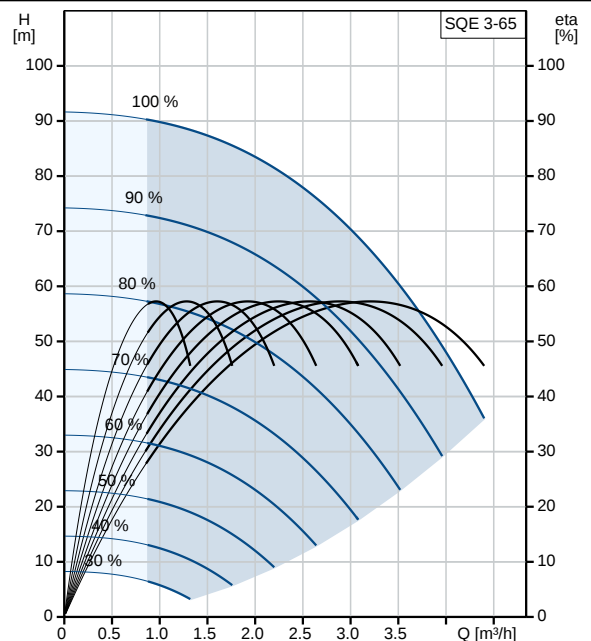

On request SQE 3-65 50 Hz

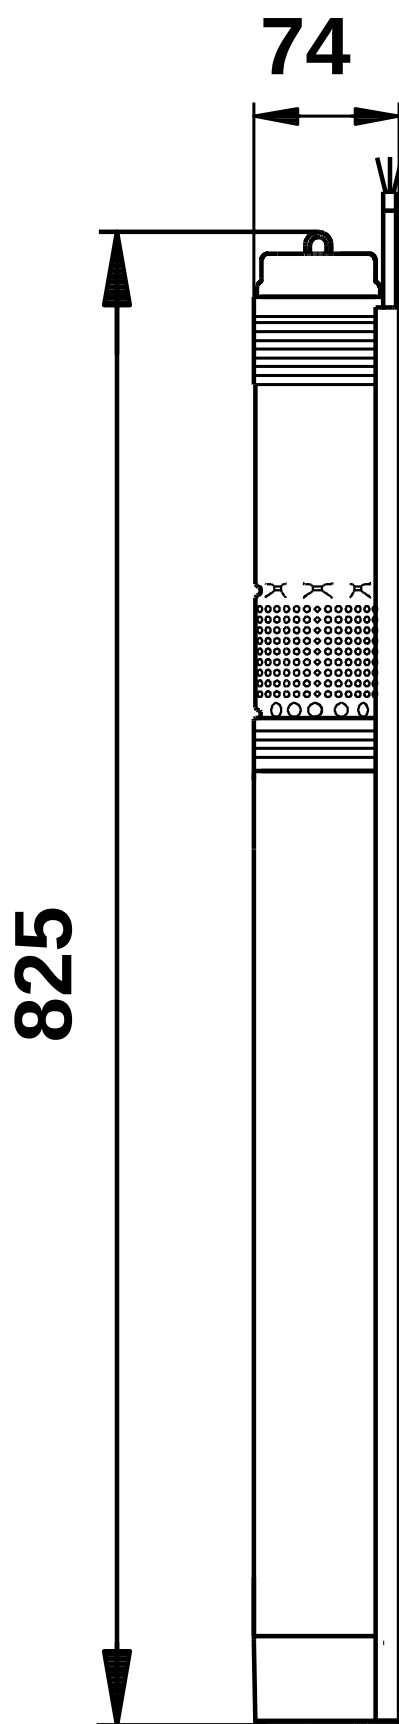

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Exploded view




Sectional drawing (TM058200 for TPE2,TPE3)



TM058200

Exploded view (TM057026 for MGE model H/I)

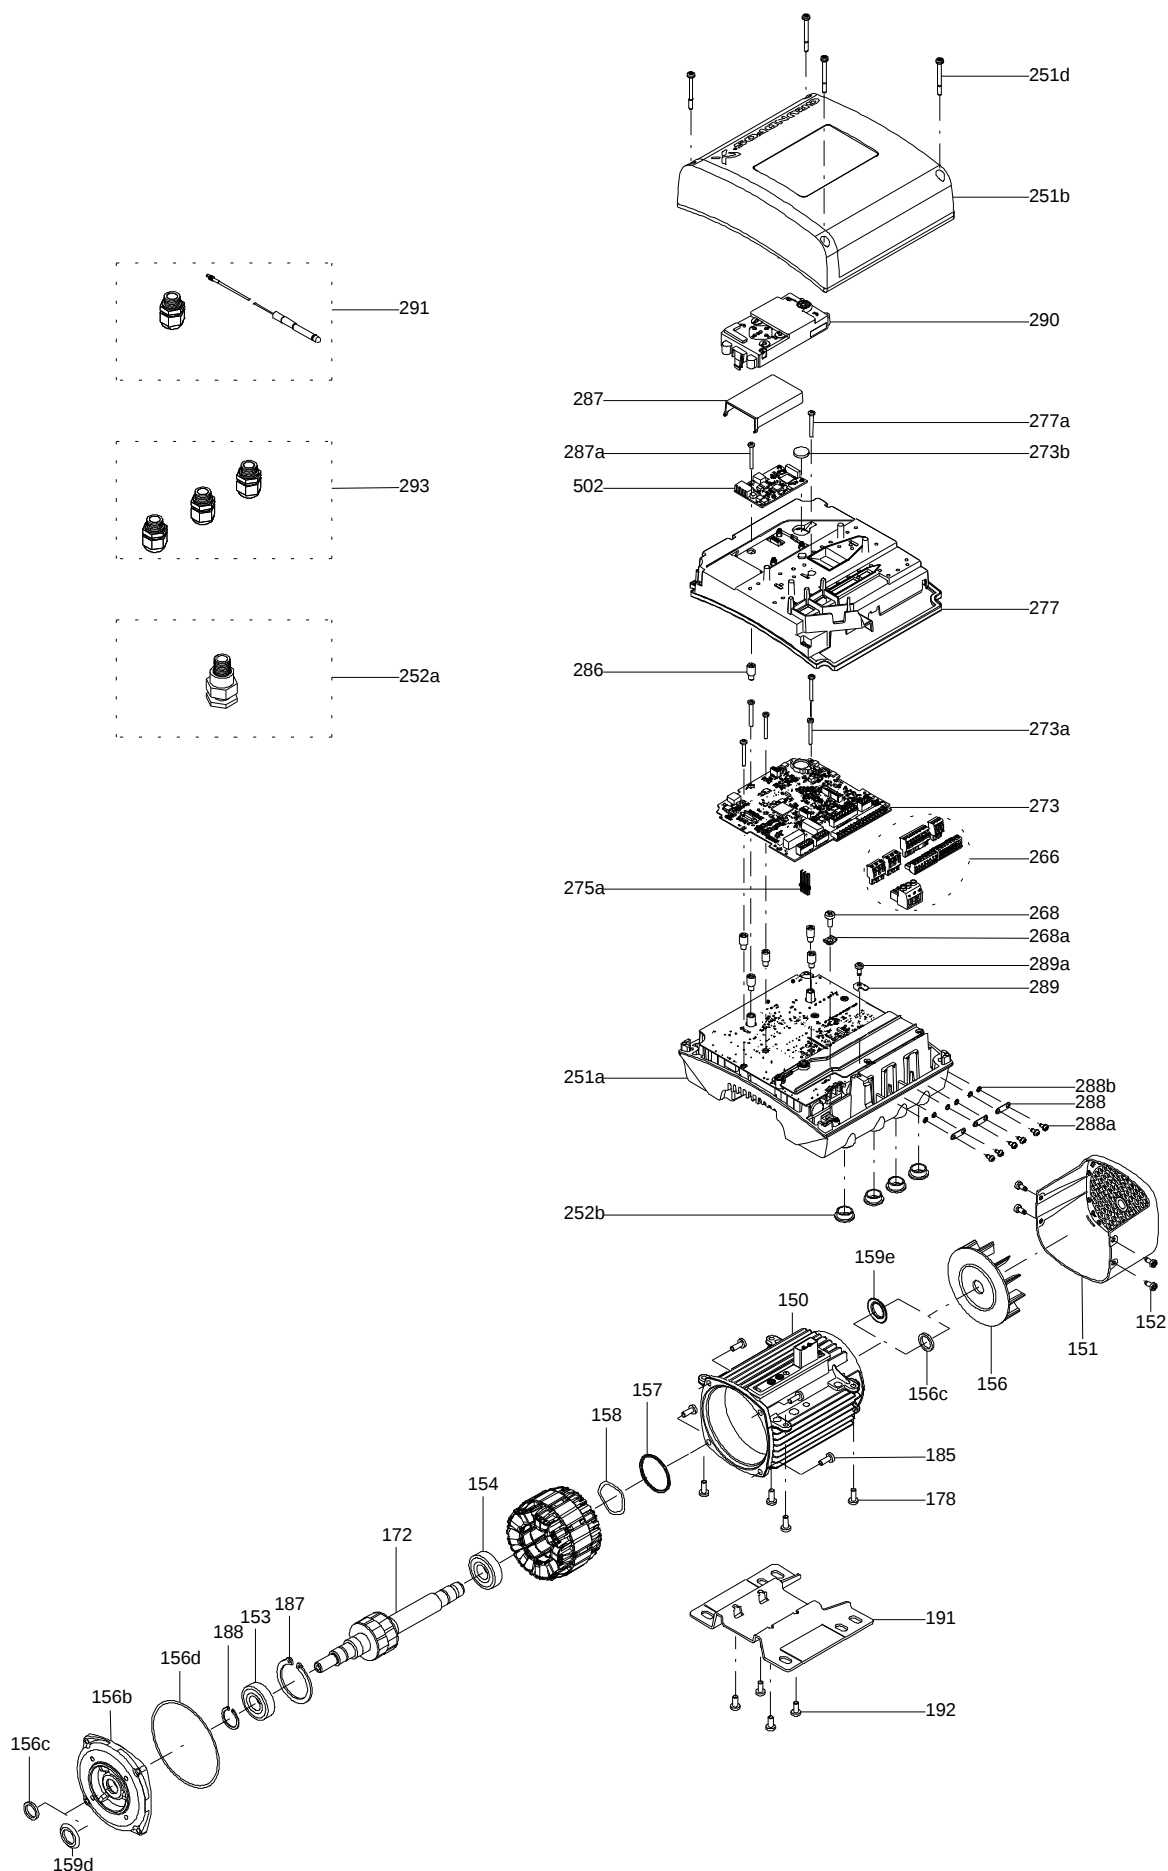

Parts list SQE 3-65, Product No. On request
Valid from 3.12.2012 (1249)

Pos	Description	Annotation	Données de classification	Référence	Quantité	Unité
-	Pump w/o motor				1	pcs
1a	Discharge chamber		Thread: RP 1 1/4"		1	
16	Shaft cpl.		Length (mm): 205,6		1	
55	Pump sleeve				1	
-	Motor				1	pcs
	Motor liquid				0	
220	Power cable				1	
- 250	Screw				4	
18a	Pan head tapping screw				2	
250	Pan head screw				4	
- 250	Screw				1	
18a	Pan head tapping screw				2	
250	Pan head screw				4	
18	Rail for cable guard				1	pcs
18a	Pan head tapping screw				2	pcs

Disclaimer: The information about the Grundfos pump in this document may be outdated.

Data may be subject to alterations without further notice.

Please contact us to verify the data above is still accurate/up-to-date.

All information is copyright Grundfos.



info@lenntech.com

<https://www.lenntech.com>

tel. +31 152 610 900

fax. +31 152 616 289