

NK40-125/130A1F2AE-SBAQE

Grundfos pump 96594543




Thank you for your interest in our products. Please contact us for more information, or visit our website


<https://www.lenntech.com/grundfos/NKBASIS/96594543/NK-40-125-130-A1-F-A-E-BAQE.html>

info@lenntech.com

tel. +31 152 610 900


fax. +31 152 616 289

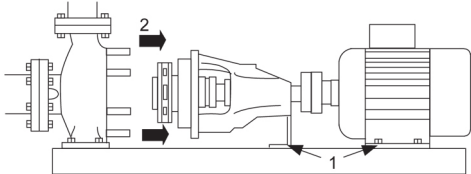Position	Qty.	Description
	1	NK 40-125/130 A1-F-A-E-BAQE  Product No.: On request Non-self-priming, single-stage, centrifugal volute pump designed according to ISO 5199 with dimensions and rated performance according to EN 733. Flanges are PN 16 with dimensions according to EN 1092-2. The pump has an axial suction port, a radial discharge port and horizontal shaft. It is of the back pull-out design enabling removal of the motor, coupling, bearing bracket and impeller without disturbing the pump housing or pipework. The unbalanced rubber bellows seal is according to DIN EN 12756. The pump is fitted with a foot-mounted, fan-cooled asynchronous motor. Pump and motor are mounted on a common base frame. Further product details The product's minimum efficiency index (MEI) is greater or equal to 0.70. This is by the Commission Regulation (EU) considered as an indicative benchmark for best-performing water pump available on the market as from 1 January 2013. Pump and motor are mounted on a common steel base frame in accordance with ISO 3661. The back pull-out design makes it possible to make service on the pump when the pump housing is still connected to the inlet and discharge pipes. 1) Remove the bolts in the bearing bracket support foot and motor foot. 2) Remove the bearing bracket and the motor from the pump housing.  Cast-iron parts have an epoxy-based coating made in a cathodic electro-deposition (CED) process. CED is a high-quality dip-painting process where an electrical field around the products ensures deposition of paint particles as a thin, well-controlled layer on the surface. An integral part of the process is a pretreatment. The entire process consists of these elements: 1) Alkaline-based cleaning. 2) Zinc phosphating. 3) Cathodic electro-deposition. 4) Curing to a dry film thickness 18-22 my m. The colour code for the finished product is NCS 9000/RAL 9005. Pump The pump housing has both a priming and a drain hole closed by plugs. The impeller is a closed impeller with double-curved blades with smooth surfaces. The impeller is statically balanced according to ISO 1940-1 class G6.3 and hydraulically balanced to compensate for axial thrust. Wear rings used in pump housing and for impeller are made of bronze/brass or cast iron. The pump is fitted with an unbalanced rubber bellows seal with torque transmission across the spring and around the bellows. Due to the bellows, the seal does not wear the shaft, and the axial movement is not prevented by deposits on the shaft. Primary seal: • Rotating seal ring material: carbon graphite, metal-impregnated • Stationary seat material: silicon carbide (SiC) This material pairing has a very good corrosion resistance and is especially suitable for water up to 120 °C. However, seal life will be reduced at temperatures above 90 °C. The material pairing is not recommended for liquids containing particles as this will result in heavy wear on the SiC face. Secondary seal material: EPDM (ethylene-propylene rubber)





Position	Qty.	Description																																																														
		EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils. The shaft is made of stainless steel and has a diameter of 24 mm where the coupling is mounted. The pump uses a standard coupling between the pump and motor shaft.  Motor The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards and mounting designation B3 (IM 1001). Electrical tolerances comply with IEC 60034. The motor does not incorporate motor protection and must be connected to a motor-protective circuit breaker which can be manually reset. The motor-protective circuit breaker must be set according to the rated current of the motor (I1/1). Technical data Liquid: <table><tr><td>Pumped liquid:</td><td>Water</td></tr><tr><td>Liquid temperature range:</td><td>0 .. 120 °C</td></tr><tr><td>Liquid temperature during operation:</td><td>20 °C</td></tr><tr><td>Density:</td><td>998.2 kg/m³</td></tr></table> Technical: <table><tr><td>Rated flow:</td><td>22.3 m³/h</td></tr><tr><td>Rated head:</td><td>4.1 m</td></tr><tr><td>Actual impeller diameter:</td><td>130 mm</td></tr><tr><td>Impeller nom:</td><td>125 mm</td></tr><tr><td>Primary shaft seal:</td><td>BAQE</td></tr><tr><td>Secondary shaft seal:</td><td>NONE</td></tr><tr><td>Curve tolerance:</td><td>ISO9906:2012 3B</td></tr></table> Materials: <table><tr><td>Pump housing:</td><td>Cast iron EN-GJL-250 ASTM A48-40 B</td></tr><tr><td>Impeller:</td><td>Cast iron EN-GJL-200 ASTM A48-30 B</td></tr><tr><td>Rubber:</td><td>EPDM</td></tr><tr><td>Wear ring mat.:</td><td>High alloy brass(CuZn34Mn3Al2</td></tr></table> Installation: <table><tr><td>Maximum ambient temperature:</td><td>40 °C</td></tr><tr><td>Maximum operating pressure:</td><td>16 bar</td></tr><tr><td>Flange standard:</td><td>EN 1092-2</td></tr><tr><td>Pump inlet:</td><td>DN 65</td></tr><tr><td>Pump outlet:</td><td>DN 40</td></tr><tr><td>Pressure rating:</td><td>PN 16</td></tr><tr><td>Coupling type:</td><td>Standard</td></tr><tr><td>Base frame:</td><td>EN / ISO</td></tr></table> Electrical data: <table><tr><td>Motor type:</td><td>71B</td></tr><tr><td>Rated power - P2:</td><td>0.37 kW</td></tr><tr><td>Mains frequency:</td><td>50 Hz</td></tr><tr><td>Rated voltage:</td><td>3 x 220-240D/380-415Y V</td></tr><tr><td>Rated current:</td><td>1.90/1.10 A</td></tr><tr><td>Starting current:</td><td>400-440 %</td></tr><tr><td>Cos phi - power factor:</td><td>0.77-0.67</td></tr><tr><td>Rated speed:</td><td>1400-1420 rpm</td></tr></table>	Pumped liquid:	Water	Liquid temperature range:	0 .. 120 °C	Liquid temperature during operation:	20 °C	Density:	998.2 kg/m³	Rated flow:	22.3 m³/h	Rated head:	4.1 m	Actual impeller diameter:	130 mm	Impeller nom:	125 mm	Primary shaft seal:	BAQE	Secondary shaft seal:	NONE	Curve tolerance:	ISO9906:2012 3B	Pump housing:	Cast iron EN-GJL-250 ASTM A48-40 B	Impeller:	Cast iron EN-GJL-200 ASTM A48-30 B	Rubber:	EPDM	Wear ring mat.:	High alloy brass(CuZn34Mn3Al2	Maximum ambient temperature:	40 °C	Maximum operating pressure:	16 bar	Flange standard:	EN 1092-2	Pump inlet:	DN 65	Pump outlet:	DN 40	Pressure rating:	PN 16	Coupling type:	Standard	Base frame:	EN / ISO	Motor type:	71B	Rated power - P2:	0.37 kW	Mains frequency:	50 Hz	Rated voltage:	3 x 220-240D/380-415Y V	Rated current:	1.90/1.10 A	Starting current:	400-440 %	Cos phi - power factor:	0.77-0.67	Rated speed:	1400-1420 rpm
Pumped liquid:	Water																																																															
Liquid temperature range:	0 .. 120 °C																																																															
Liquid temperature during operation:	20 °C																																																															
Density:	998.2 kg/m³																																																															
Rated flow:	22.3 m³/h																																																															
Rated head:	4.1 m																																																															
Actual impeller diameter:	130 mm																																																															
Impeller nom:	125 mm																																																															
Primary shaft seal:	BAQE																																																															
Secondary shaft seal:	NONE																																																															
Curve tolerance:	ISO9906:2012 3B																																																															
Pump housing:	Cast iron EN-GJL-250 ASTM A48-40 B																																																															
Impeller:	Cast iron EN-GJL-200 ASTM A48-30 B																																																															
Rubber:	EPDM																																																															
Wear ring mat.:	High alloy brass(CuZn34Mn3Al2																																																															
Maximum ambient temperature:	40 °C																																																															
Maximum operating pressure:	16 bar																																																															
Flange standard:	EN 1092-2																																																															
Pump inlet:	DN 65																																																															
Pump outlet:	DN 40																																																															
Pressure rating:	PN 16																																																															
Coupling type:	Standard																																																															
Base frame:	EN / ISO																																																															
Motor type:	71B																																																															
Rated power - P2:	0.37 kW																																																															
Mains frequency:	50 Hz																																																															
Rated voltage:	3 x 220-240D/380-415Y V																																																															
Rated current:	1.90/1.10 A																																																															
Starting current:	400-440 %																																																															
Cos phi - power factor:	0.77-0.67																																																															
Rated speed:	1400-1420 rpm																																																															

Position	Qty.	Description
		Efficiency: 66.0% Motor efficiency at full load: 66.0 % Motor efficiency at 3/4 load: 72.2 % Motor efficiency at 1/2 load: 67.6 % Number of poles: 4 Enclosure class (IEC 34-5): 55 Dust/Jetting Insulation class (IEC 85): F Lubricant type: Grease Others: Minimum efficiency index, MEI ≥: 0.70 ErP status: EuP Standalone/Prod. Net weight: 86 kg Gross weight: 99 kg Shipping volume: 0.249 m³

On request NK 40-125/130 A1-F-A-E-BAQE 50 Hz

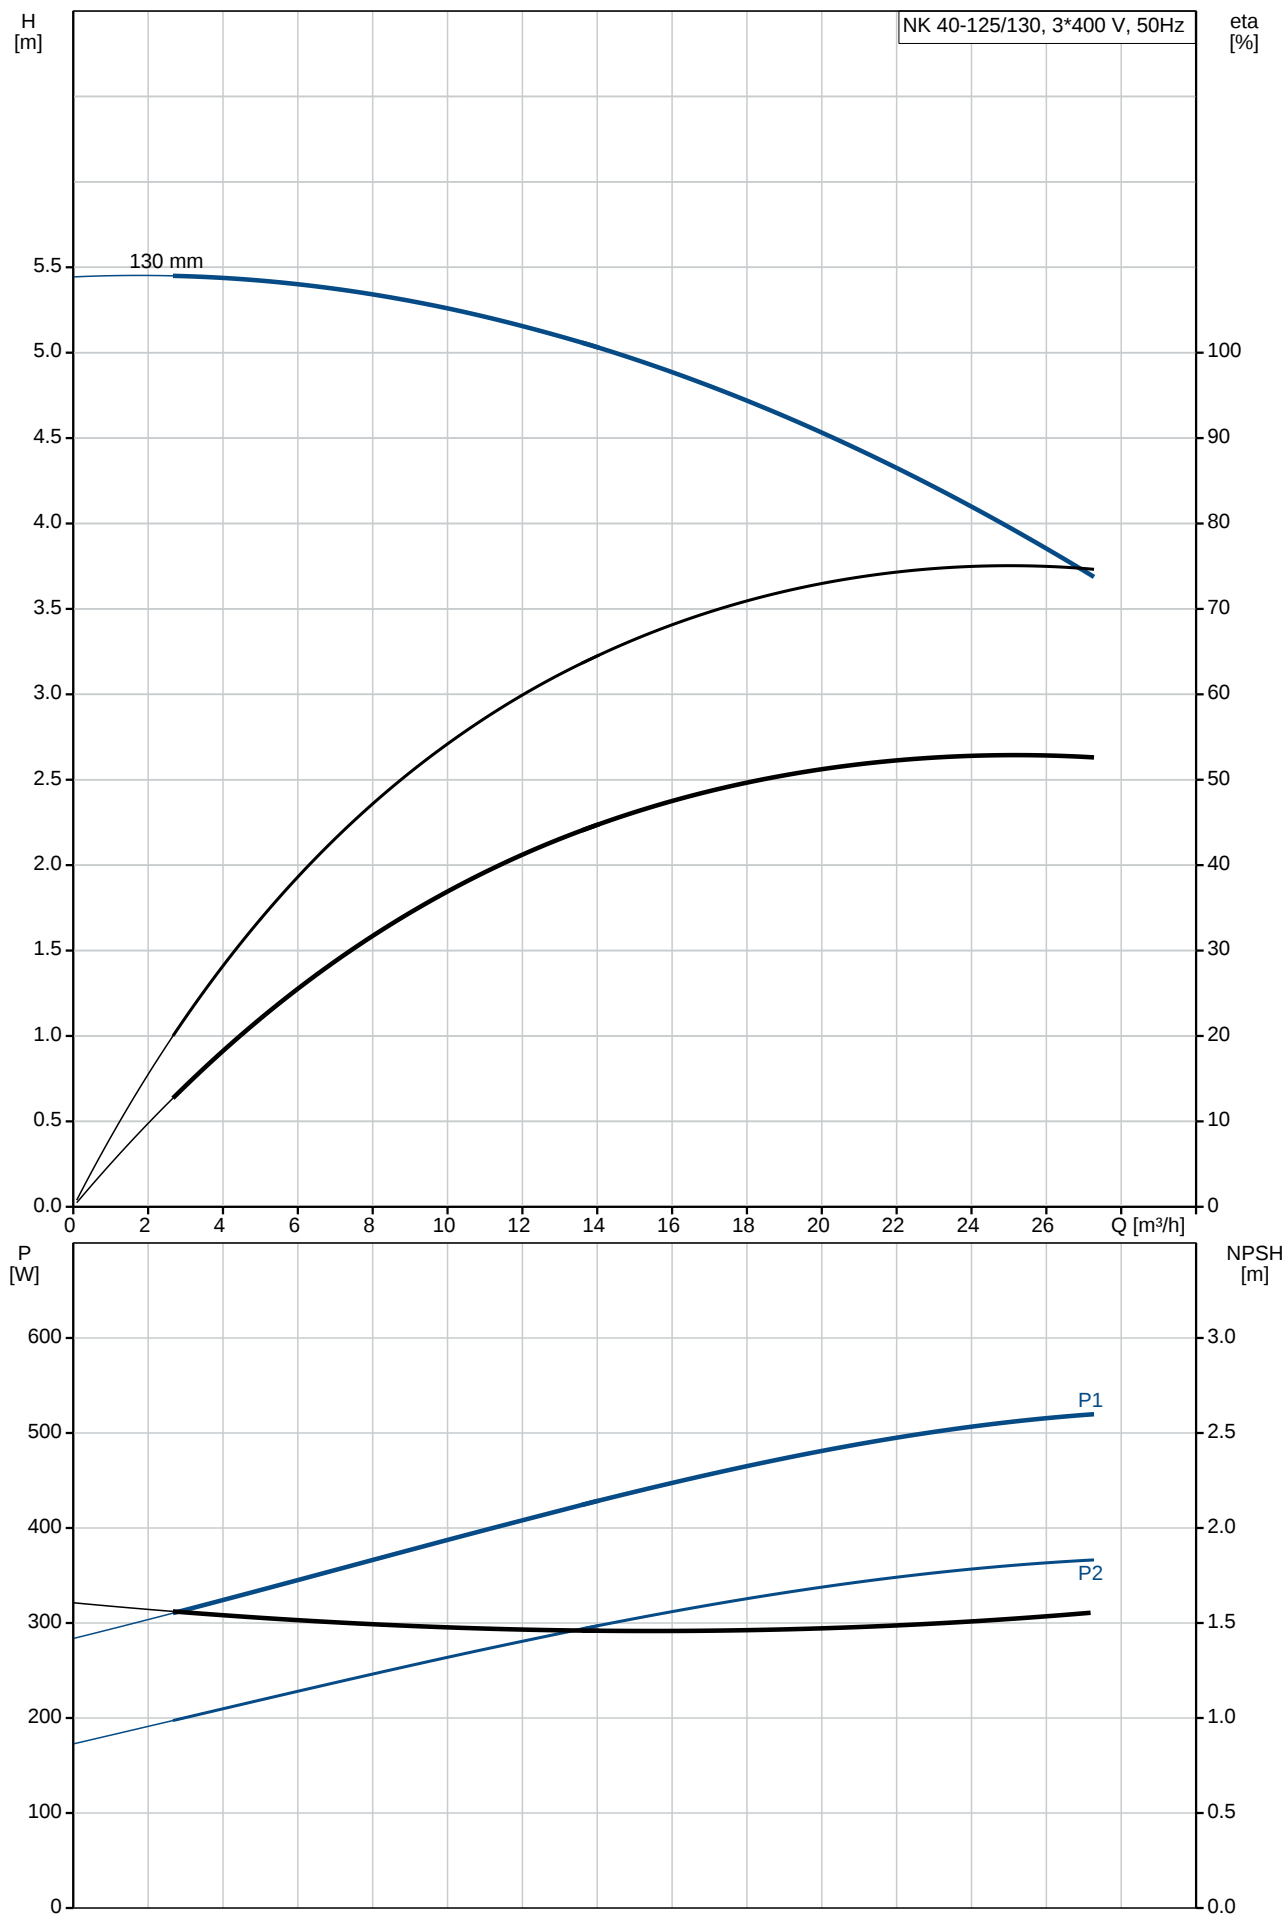


Description	Value
General information:	
Product name:	NK 40-125/130
Product No:	A1-F-A-E-BAQE
EAN number:	On request
Technical:	
Rated flow:	22.3 m³/h
Rated head:	4.1 m
Actual impeller diameter:	130 mm
Impeller nom:	125 mm
Primary shaft seal:	BAQE
Secondary shaft seal:	NONE
Shaft diameter:	24 mm
Curve tolerance:	ISO9906:2012 3B
Pump version:	A1
Materials:	
Pump housing:	Cast iron
	EN-GJL-250
	ASTM A48-40 B
Impeller:	Cast iron
	EN-GJL-200
	ASTM A48-30 B
Material code:	A
Rubber:	EPDM
Code for rubber:	E
Wear ring mat.:	High alloy brass(CuZn34Mn3Al2
Installation:	
Maximum ambient temperature:	40 °C
Maximum operating pressure:	16 bar
Flange standard:	EN 1092-2
Pump inlet:	DN 65
Pump outlet:	DN 40
Pressure rating:	PN 16
Coupling type:	Standard
Wear ring(s):	neckring(s)
Base frame:	EN / ISO
Connect code:	F
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 120 °C
Liquid temperature during operation:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	71B
Rated power - P2:	0.37 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 220-240D/380-415Y V
Rated current:	1.90/1.10 A
Starting current:	400-440 %
Cos phi - power factor:	0.77-0.67
Rated speed:	1400-1420 rpm
Efficiency:	66.0%
Motor efficiency at full load:	66.0 %
Motor efficiency at 3/4 load:	72.2 %
Motor efficiency at 1/2 load:	67.6 %
Number of poles:	4
Enclosure class (IEC 34-5):	55 Dust/Jetting
Insulation class (IEC 85):	F
Motor protec:	NONE
Motor No:	87100381
Lubricant type:	Grease
Others:	
Minimum efficiency index, MEI ≥:	0.70

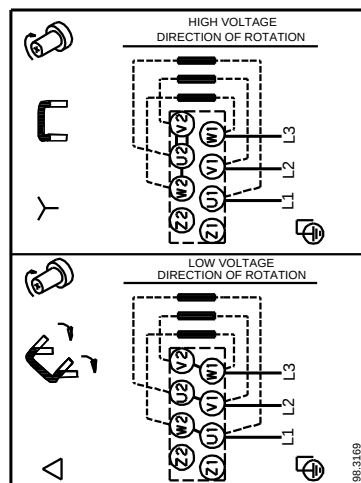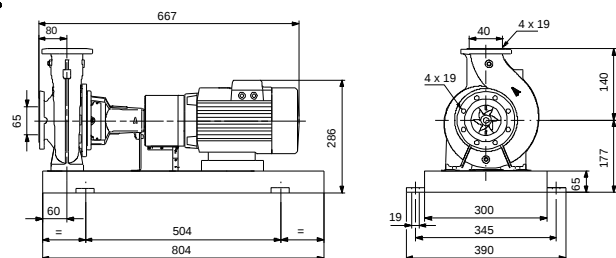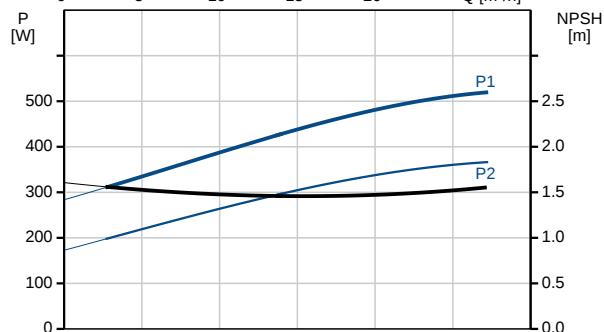
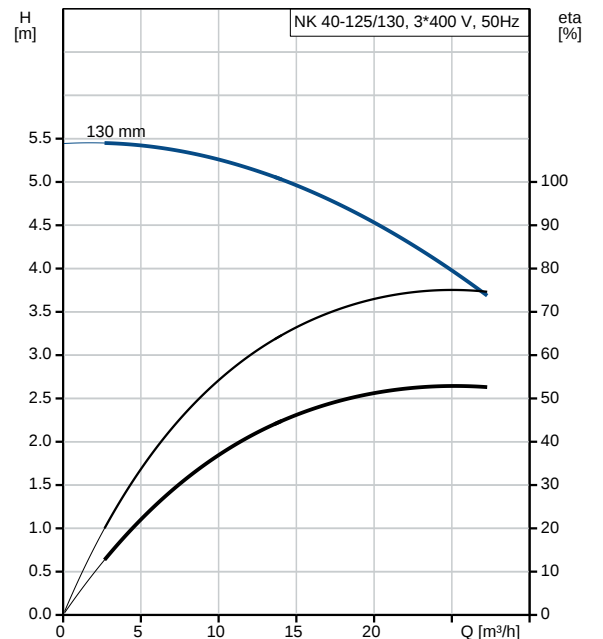


Description	Value
ErP status:	EuP Standalone/Prod.
Net weight:	86 kg
Gross weight:	99 kg
Shipping volume:	0.249 m ³

On request NK 40-125/130 A1-F-A-E-BAQE 50 Hz

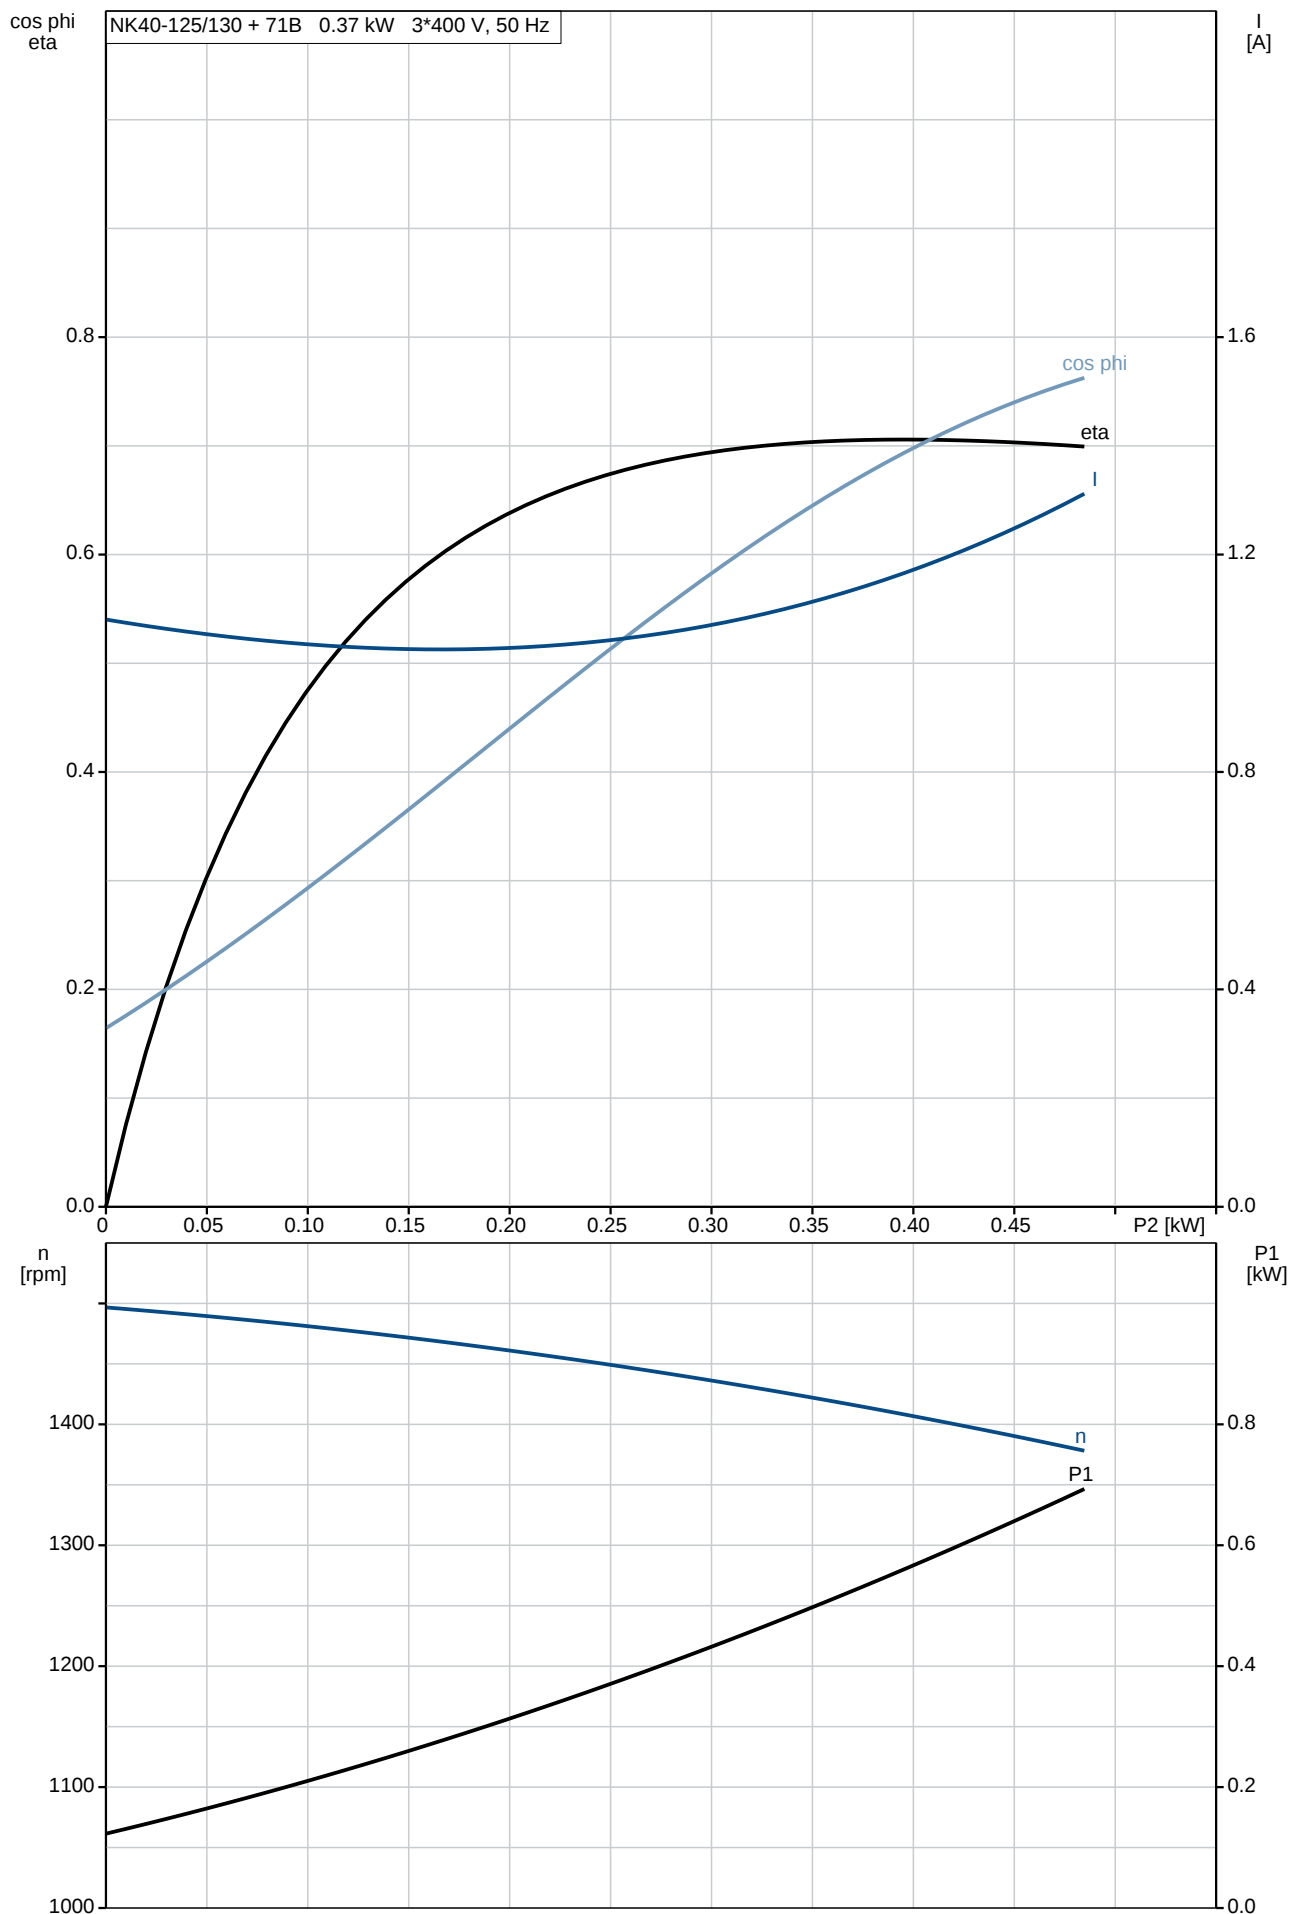

On request NK 40-125/130 A1-F-A-E-BAQE 50 Hz

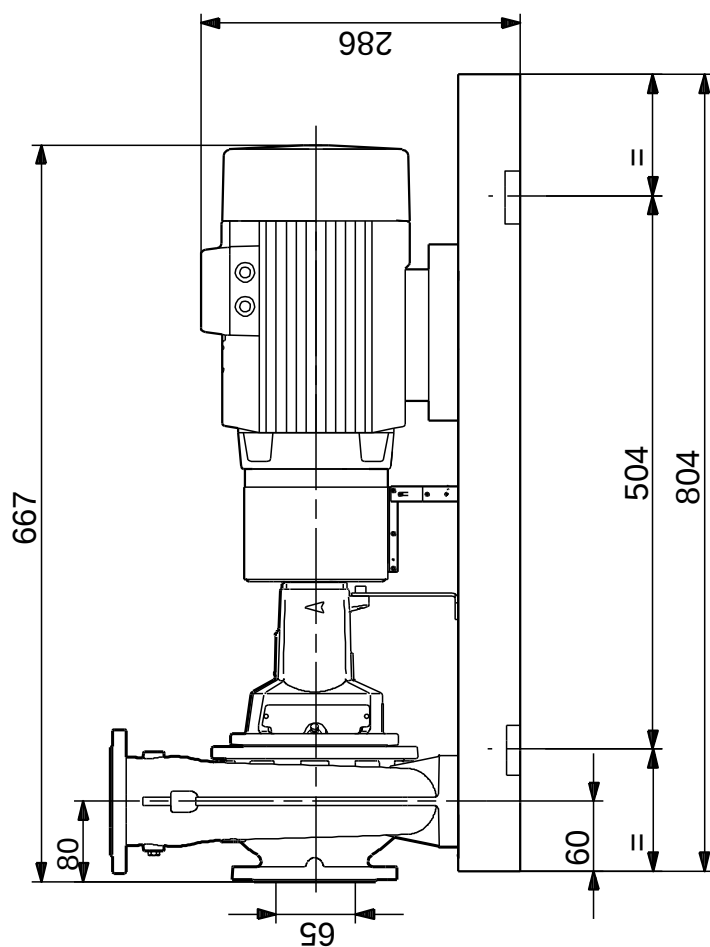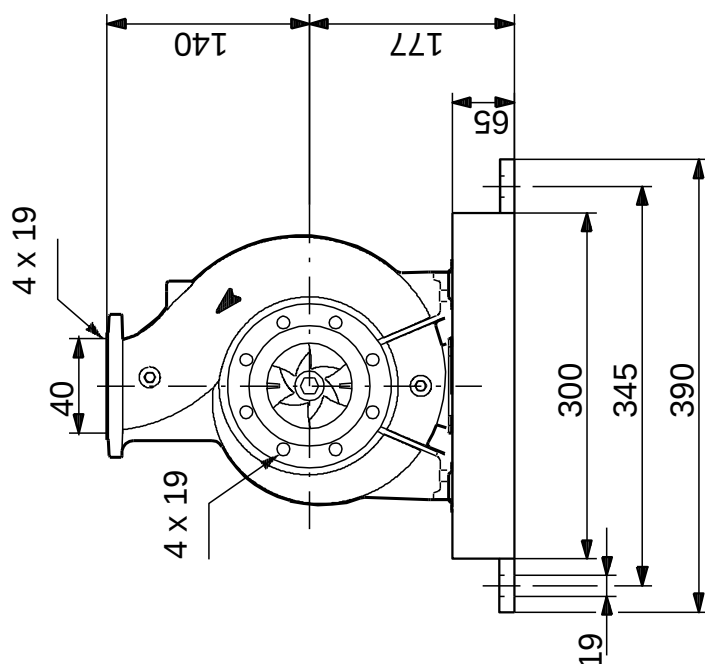

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Exploded view




Sectional drawing (TM058200 for TPE2,TPE3)



TM058200

Exploded view (TM057026 for MGE model H/I)

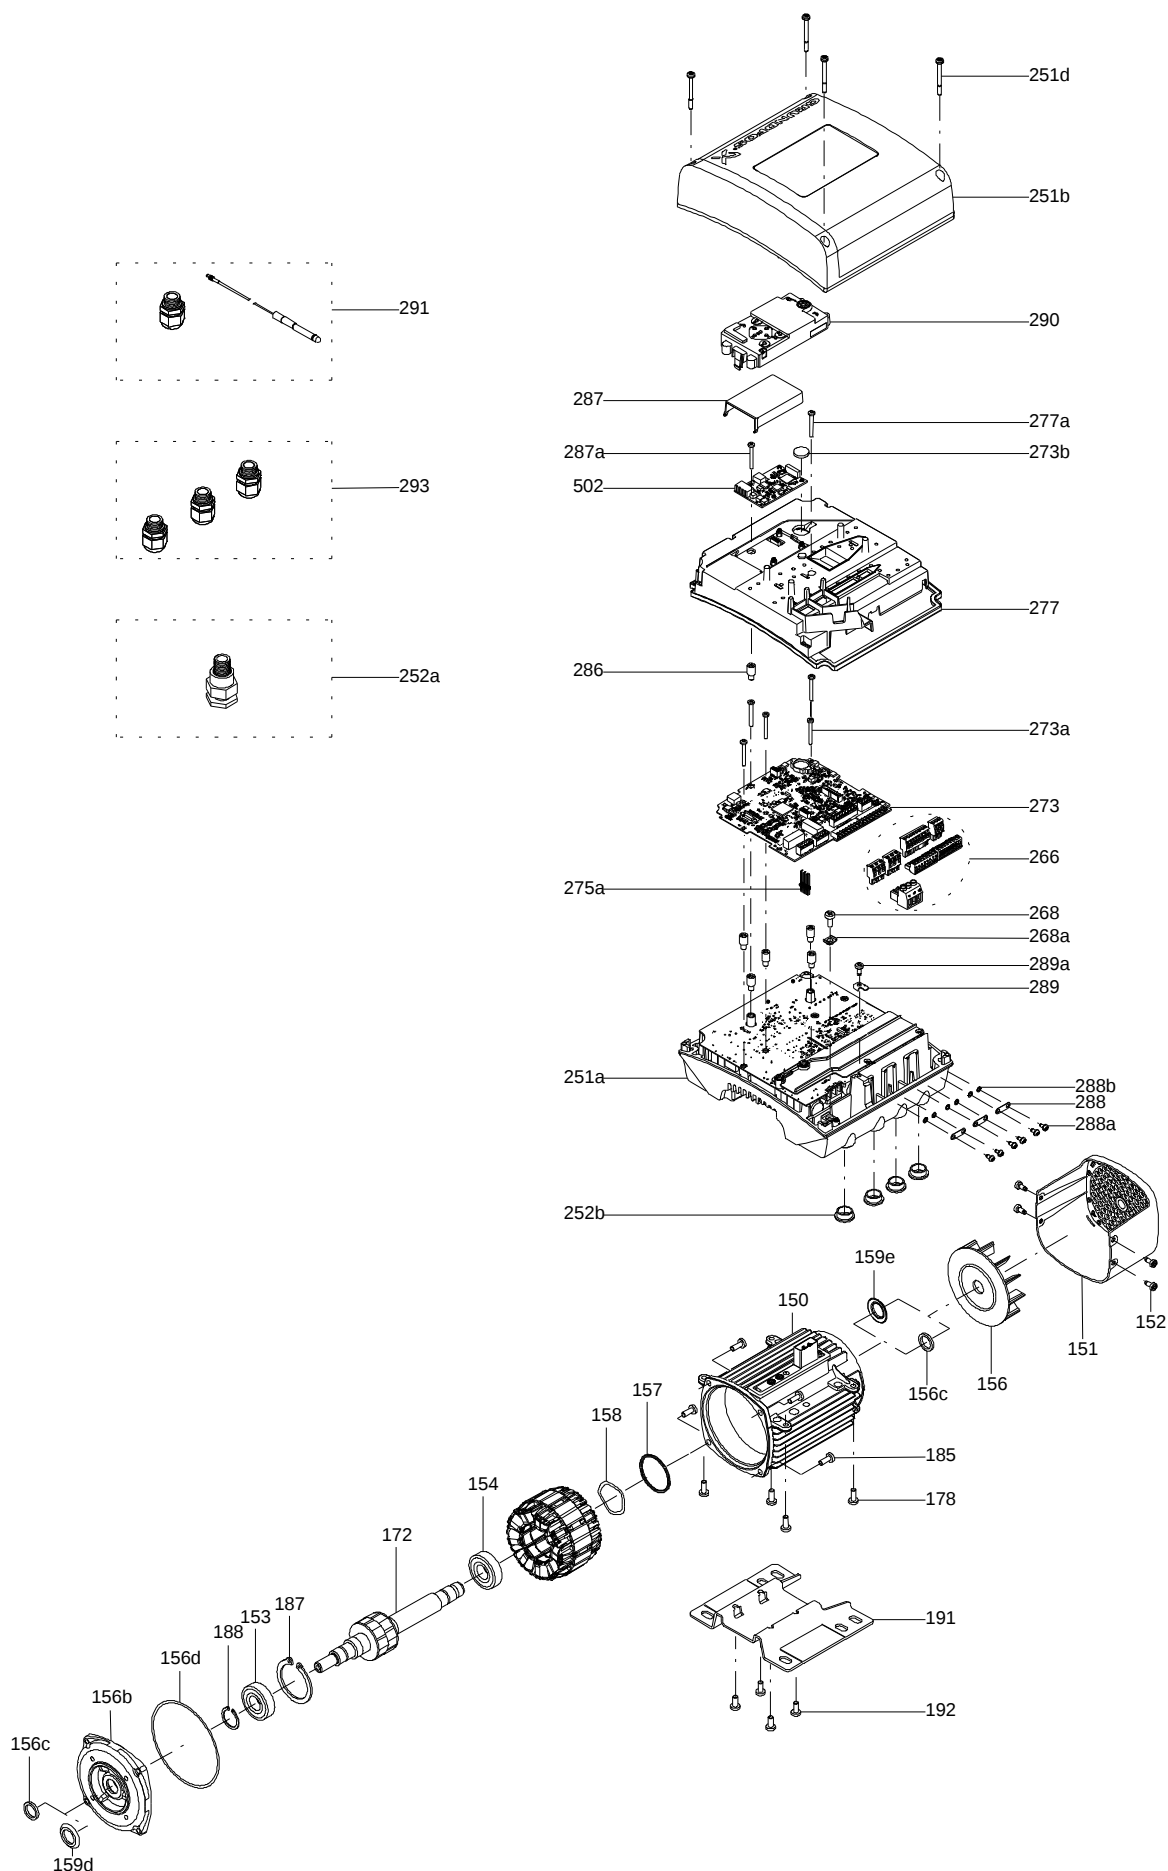

Parts list NK 40-125/130, Product No. On request
Valid from 1.1.2008 (0801)

Pos	Description	Annotation	Données de classification	Référence	Quantité	Unité
+	Motor				1	pcs
-	Coupling cpl.				1	pcs
-	Bolt				4	
-	Bolt				1	
89d	Bolt					
89e	Nut					
89f	Washer		Internal diameter: 14,5			
			Outer diameter: 25			
89g	Spring lock washer					
89q	Washer		Internal diameter: 16,5			
			Outer diameter: 25,0			
89	Rubber blocks for coupling				1	
9	Socket set screw				2	
89.a	Socket set screw		Length (mm): 8		1	
			Thread: M6			
89.b	Socket set screw		Length (mm): 8		1	
			Thread: M6			
89.o	Connector				1	
89.p	Coupling female				1	
-	Nut				1	pcs
66	Washer				1	
66a	Spring lock washer				1	
67	Nut		Thread: M14		1	
-	Pump housing cpl.				1	pcs
6	Pump housing				1	
36	Nut		Thread: M10		6	
	Bearing bracket				1	pcs
-	Shaft seal cpl.				1	pcs
72a	O-ring		Diameter: 177,39		1	
			Material type: EPDM			
			Thickness: 3,53			
105	Shaft seal		Material type: BAQE		1	
- 7	Coupling guard cpl.				1	pcs
- 7	Coupling guard cpl.				1	
7	Guard				1	
7c	Spacer f/coupling guard				1	
7e	Hex socket head cap screw				3	
94	Lock nut		Thread: M6		2	
7b	Retainer for coupling guard				1	
7k	Hex socket head cap screw		Length (mm): 10		4	
			Thread: M6			
- 7.d	Foot for coupling guard				1	pcs
7d	Foot for coupling guard				1	
49	Impeller		Outer diameter: 130		1	pcs
72a	O-ring		Diameter: 177,39		1	pcs
			Material type: EPDM			
			Thickness: 3,53			
- 77	Cover				1	pcs
77	Cover				1	
- 90	Base plate				1	pcs
	Hex head screw		Length (mm): 35MM		4	
			Thread: M12			
	Hex head screw		Length (mm): 35MM		2	
			Thread: M12			
	Washer				4	
	Base plate				1	
	Support block				2	
	Support block				2	
	Hex head bolt				4	

Pos	Description	Annotation	Données de classification	Référence	Quantité	Unité
7h	Hex head screw		Length (mm): 16		2	
			Thread: M8			
66	Washer				4	
66	Washer				2	
66	Washer				2	

Disclaimer: The information about the Grundfos pump in this document may be outdated.

Data may be subject to alterations without further notice.

Please contact us to verify the data above is still accurate/up-to-date.

All information is copyright Grundfos.



info@lenntech.com

<https://www.lenntech.com>

tel. +31 152 610 900

fax. +31 152 616 289