

CM15-3 A-R-A-E-AVBE F-A-A-N

Grundfos Pump 96935495



Thank you for your interest in our products

Please contact us for more information, or visit our website


<https://www.lenntech.com/grundfos/CMBASIS/96935495/CM15-3-A-R-A-E-AVBE.html>

info@lenntech.com


tel. +31-15-261.09.00

fax. +31-15-261.62.89





Position	Qty.	Description
	1	CM15-3 A-R-A-E-AVBE  Product No.: 96935495 Compact, reliable, horizontal, multistage, end-suction centrifugal pump with axial suction port and radial discharge port. The shaft, impellers and chambers are made of stainless steel. The inlet and discharge parts are made of cast iron. The mechanical shaft seal is a special designed, unbalanced O-ring seal. Pipework connection is via internal Whitworth pipe threads, Rp (ISO 7/1). The pump is fitted with a 3-phase, foot-mounted, fan-cooled asynchronous motor. Further product details Pump and motor are integrated in a compact and user-friendly design. The pump is fitted to a low base plate, making it ideal for installation in systems where compactness is important. The state-of-the-art design and materials of the shaft seal ensure high wear resistance, improved sticking and dry-running capabilities and long operating life. Servicing the pump requires no special service tools. Service parts are in stock for quick delivery and are available as kits, single parts or bulk. Service videos are available on www.youtube.com. Pump A combination of a stop ring and a Nord-lock® washer secures a tight and reliable fixation of the impeller spacing pipes to the splined pump shaft. It is possible to remove and fit the hydraulic parts from the pump side. The inlet part, chambers and discharge part are hold together by four staybolts. The pump is fitted with an unbalanced O-ring seal with a rigid torque transmission system. It has a fixed seal driver ensuring a reliable rotation of all parts. The dynamic secondary seal is an O-ring. Primary seal: - Rotating seal ring material: Aluminium oxide (alumina) - Stationary seat material: Carbon graphite, resin-impregnated Carbon graphite against alumina is a good all-round seal for not too demanding applications. The corrosion resistance is often limited in water to a range between pH 5 and pH 10. Usage in liquids above +90 °C is not recommended. The seal can handle dry-running conditions for short periods. Secondary seal material: EPDM (ethylene-propylene rubber) EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils.  The pump shaft is connected to the motor shaft through a left thread and tight fit. The shaft cannot be dismantled. Motor The motor is a totally enclosed, fan-cooled motor with principal dimensions to EN 50347. Electrical tolerances comply with EN 60034. The motor efficiency is classified as IE2 in accordance with IEC 60034-30. The motor has thermistors (PTC sensors) in the windings in accordance with DIN 44081/DIN 44082. The protection reacts to both slow- and quick-rising temperatures, e.g. constant overload and stalled conditions. Thermal switches must be connected to an external control circuit in a way which ensures that the automatic reset cannot cause accidents. The motors must be connected to a motor-protective circuit breaker according to local regulations.

Position	Qty.	Description
		An installation indicator is fitted to the motor fan cover. Based on the motor cooling air, it indicates the direction of rotation of the motor. The motor is fitted with a directional sticker.  The motor can be connected to a variable speed drive for adjustment of pump performance to any duty point. Grundfos CUE offers a range of variable speed drives. Please find more information in Grundfos Product Center. Technical data Liquid: Pumped liquid: Water Liquid temperature range: -20 .. 90 °C Liquid temperature during operation: 20 °C Density: 998.2 kg/m³ Technical: Speed for pump data: 2900 rpm Rated flow: 17 m³/h Rated head: 44.6 m Primary shaft seal: AVBE Approvals on nameplate: CE,WRAS,ACS,TR,EAC Curve tolerance: ISO9906:2012 3B Materials: Pump housing: Cast iron EN-JL1030 ASTM 30 B Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304 Rubber: EPDM Installation: Maximum ambient temperature: 55 °C Maximum operating pressure: 10 bar Max pressure at stated temp: 6 bar / 90 °C 10 bar / 40 °C Flange standard: WHITWORTH THREAD RP Pump inlet: Rp 2 Pump outlet: Rp 2 Electrical data: Motor type: 100LB IE Efficiency class: IE2 Rated power - P2: 4 kW Mains frequency: 50 Hz Rated voltage: 3 x 220-240D/380-415Y V Service factor: 1 Rated current: 14,0-13,2/8,20-7,80 A Starting current: 850-950 % Rated speed: 2900-2920 rpm Motor efficiency at full load: 85.8 % Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F Others: Minimum efficiency index, MEI ≥: 0,7 Net weight: 40.2 kg Gross weight: 42.7 kg


96935495 CM15-3 50 Hz

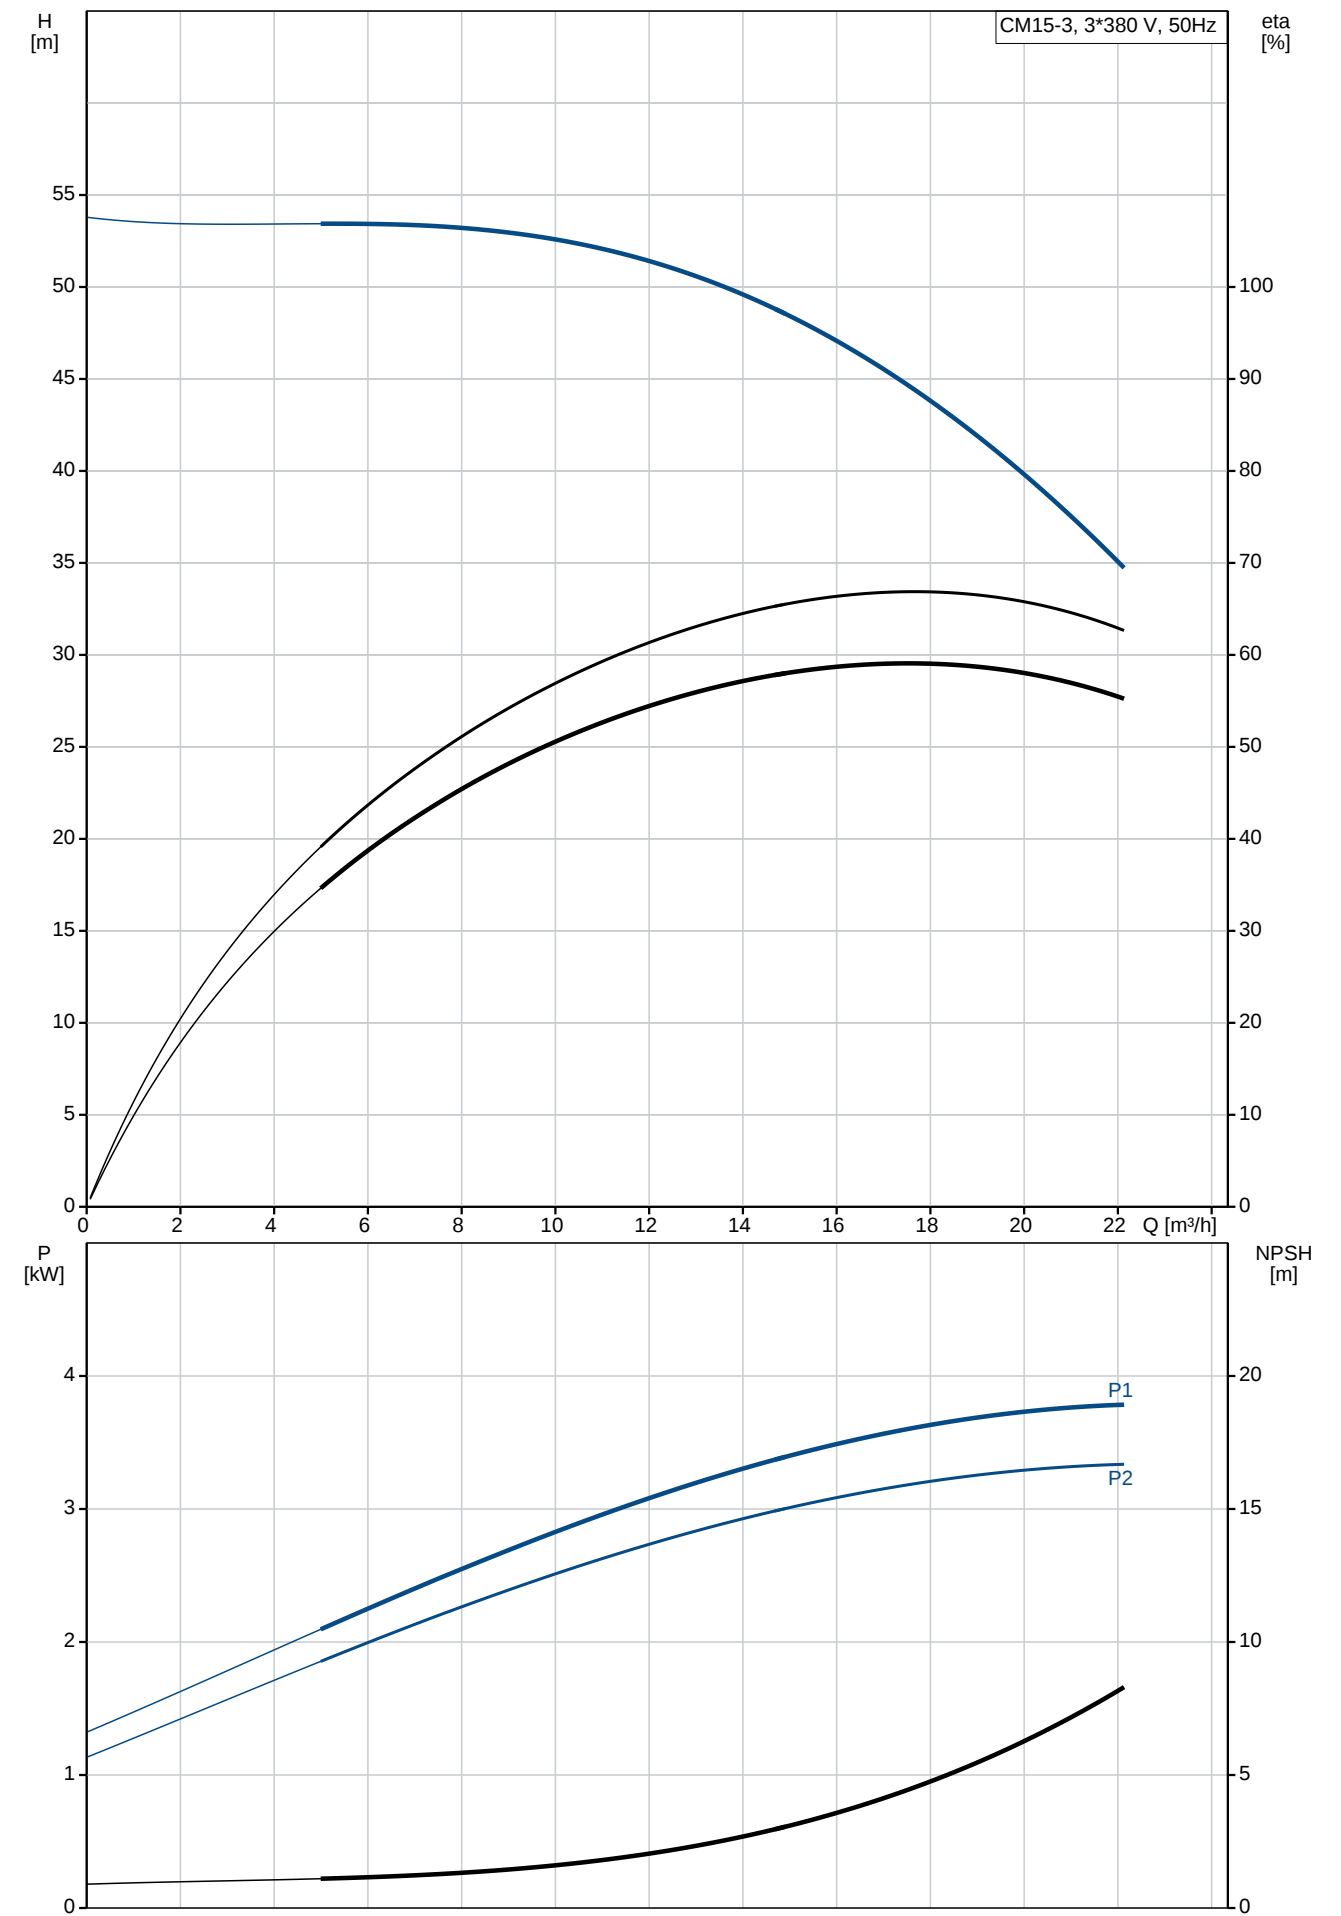


Description	Value
General information:	
Product name:	CM15-3 A-R-A-E-AVBE
Product No:	96935495
EAN number:	5700314054038
Technical:	
Speed for pump data:	2900 rpm
Rated flow:	17 m³/h
Rated head:	44.6 m
Impellers:	3
Primary shaft seal:	AVBE
Approvals on nameplate:	CE,WRAS,ACS,TR,EAC
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
Materials:	
Pump housing:	Cast iron
	EN-JL1030
	ASTM 30 B
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Material code:	A
Rubber:	EPDM
Code for rubber:	E
Installation:	
Maximum ambient temperature:	55 °C
Maximum operating pressure:	10 bar
Max pressure at stated temp:	6 bar / 90 °C
	10 bar / 40 °C
Flange standard:	WHITWORTH THREAD RP
Connect code:	R
Pump inlet:	Rp 2
Pump outlet:	Rp 2
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-20 .. 90 °C
Liquid temperature during operation:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	100LB
IE Efficiency class:	IE2
Rated power - P2:	4 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 220-240D/380-415V V
Service factor:	1
Rated current:	14,0-13,2/8,20-7,80 A
Starting current:	850-950 %
Rated speed:	2900-2920 rpm
Motor efficiency at full load:	85.8 %
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Motor protec:	TP211
Others:	
Minimum efficiency index, MEI ≥:	0,7
Net weight:	40.2 kg
Gross weight:	42.7 kg

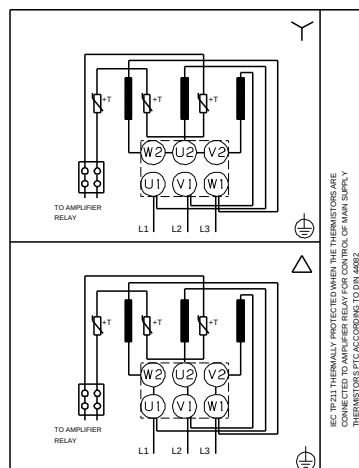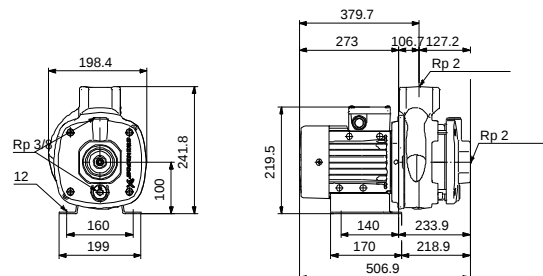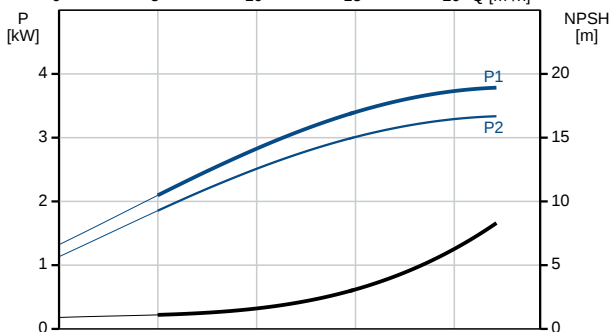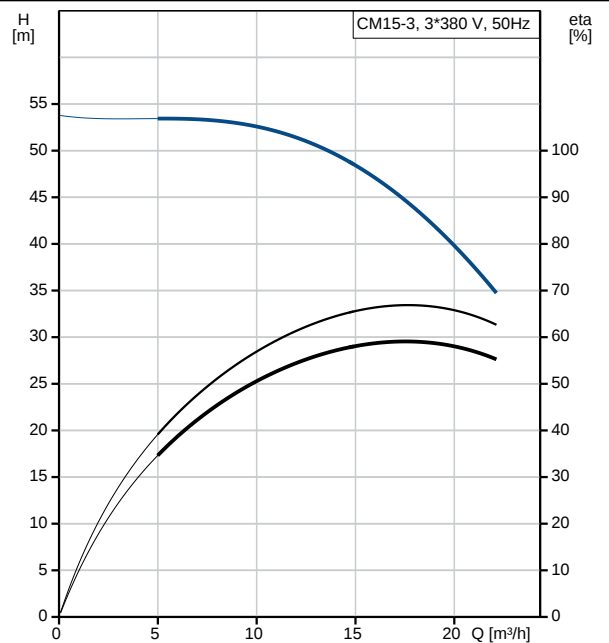

96935495 CM15-3 50 Hz

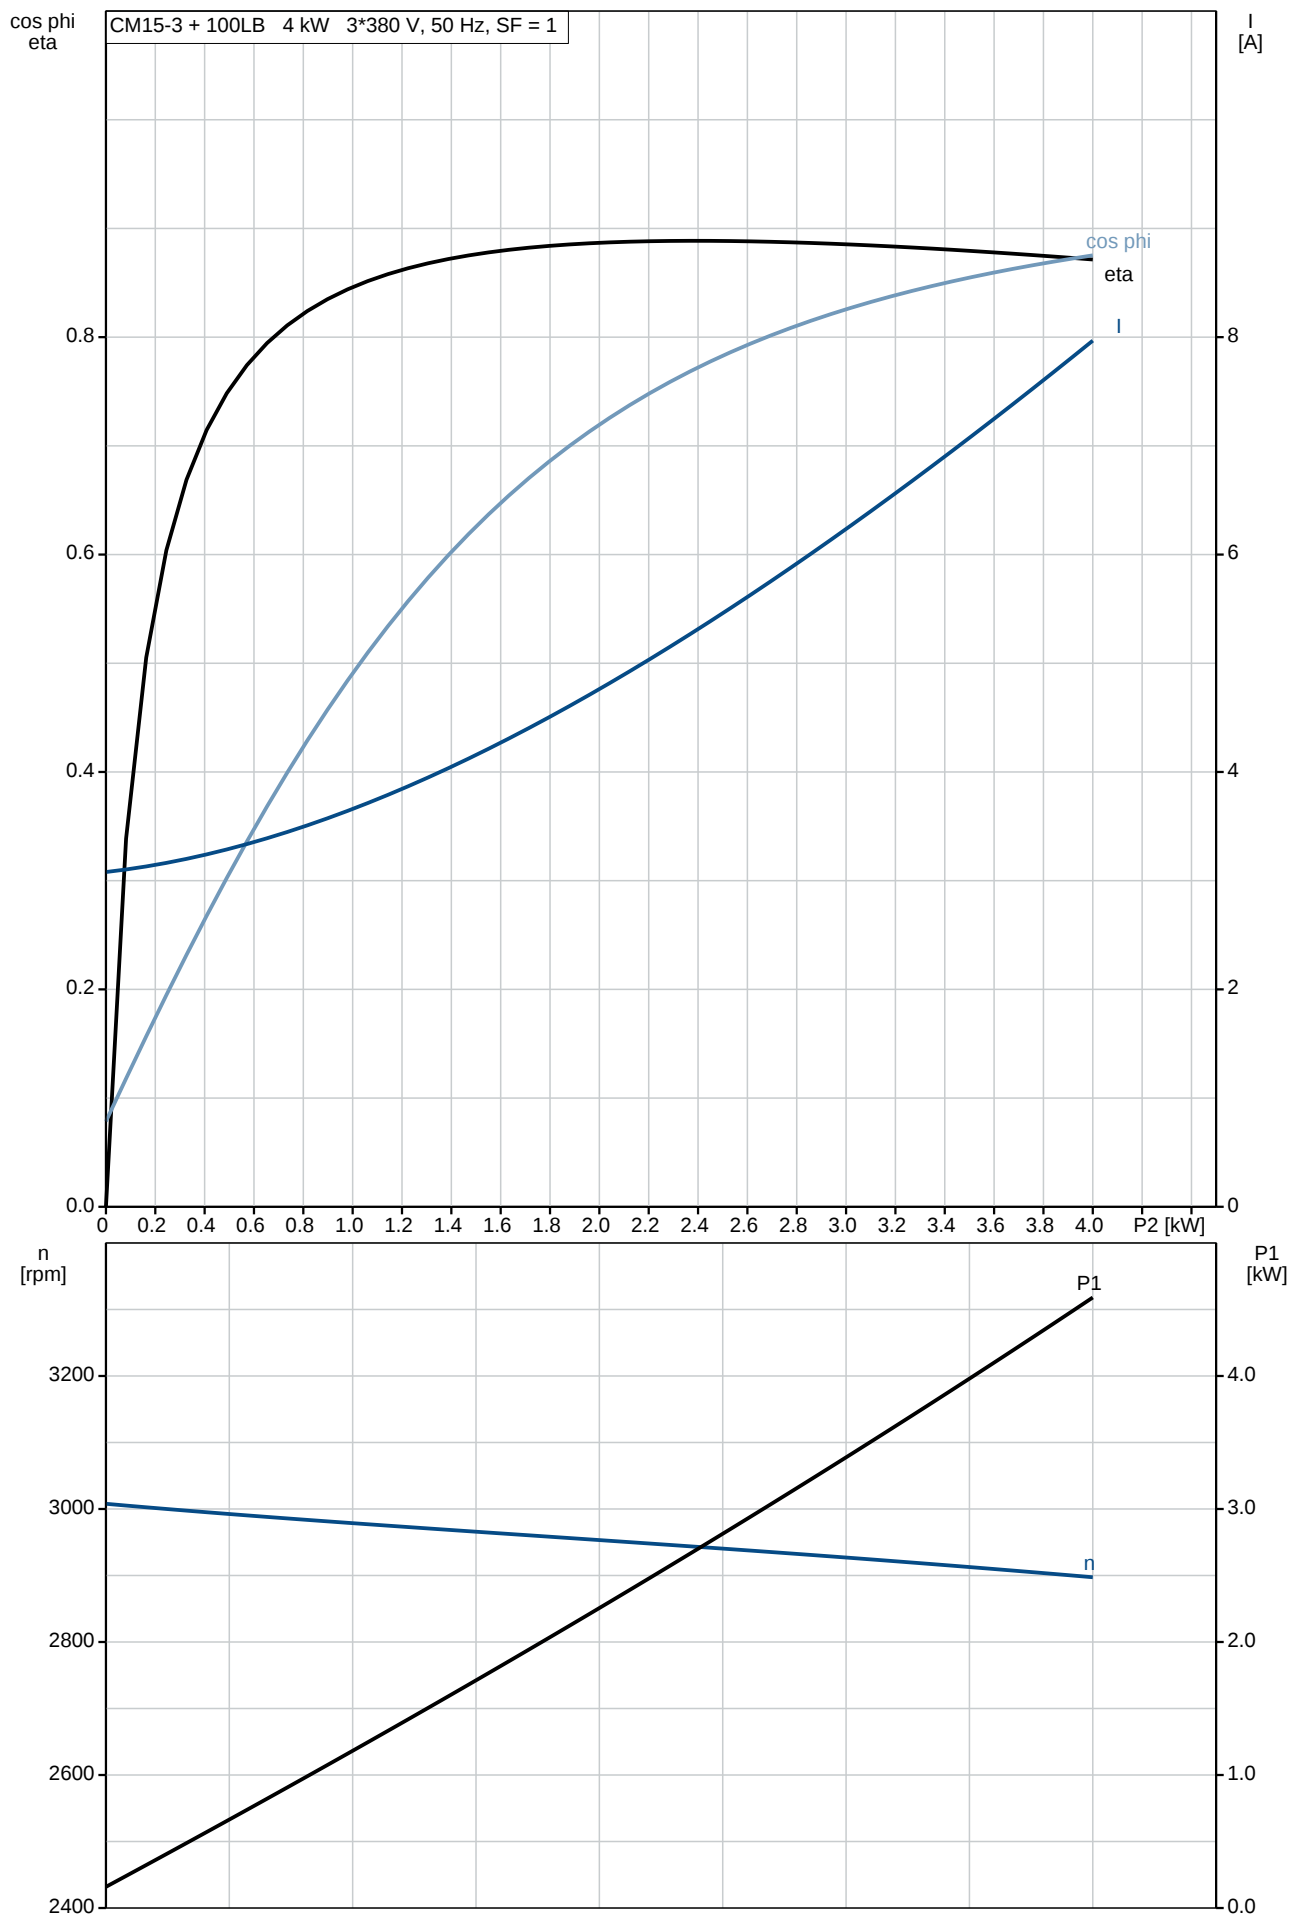


96935495 CM15-3 50 Hz

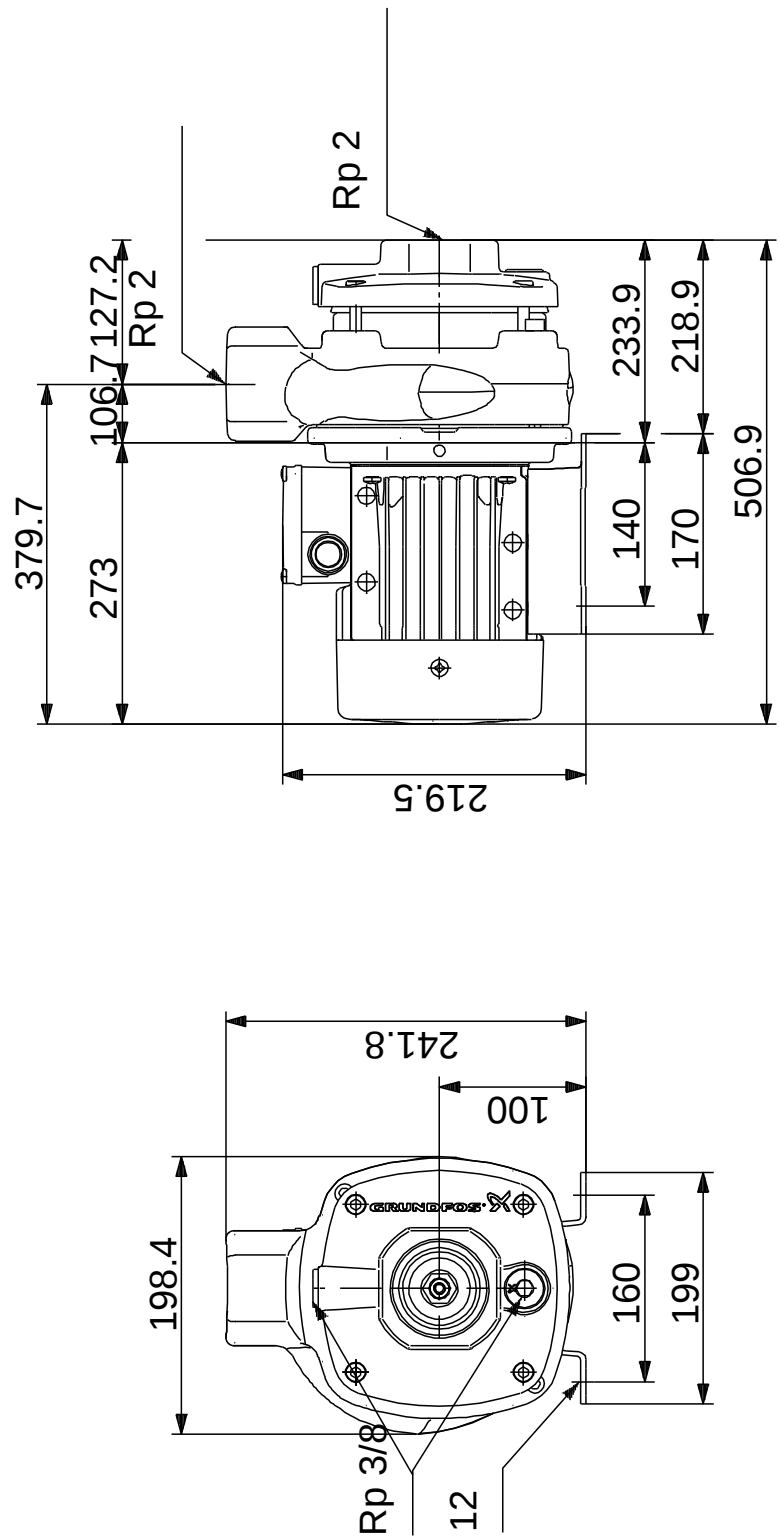

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

96935495 CM15-3 50 Hz

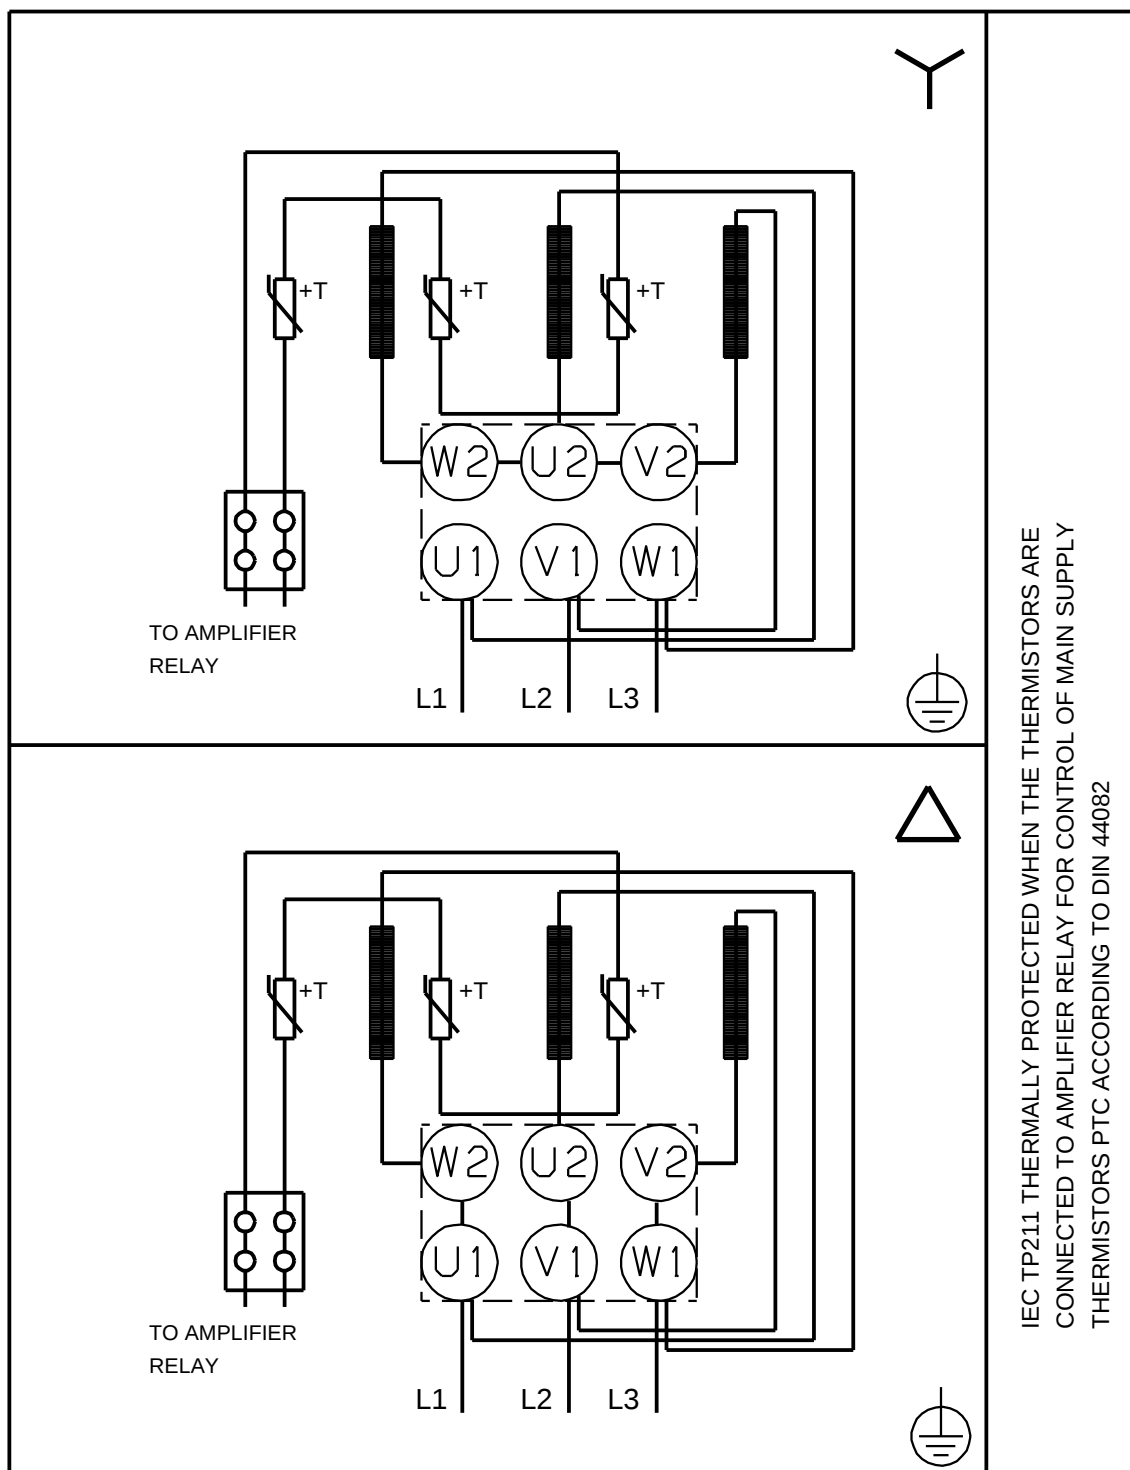

Note! All units are in [mm] unless others are stated.

*Disclaimer: The information about the Grundfos pump in this document may be outdated.
Data may be subject to alterations without further notice.
Please contact us to verify the data above is still accurate/up-to-date.*

All information is copyright Grundfos.



info@lenntech.com

www.lenntech.com

tel. +31-15-261.09.00

fax. +31-15-261.62.89