

CM3-8 A-R-G-E-AQQE C-A-A-N

Grundfos pump 97516652



Thank you for your interest in our products. Please contact us for more information, or visit our website

<https://www.lenntech.com/grundfos/CMBASIS/97516652/CM3-8-A-R-G-E-AQQE.html>

info@lenntech.com


tel. +31 152 610 900

fax. +31 152 616 289




Position	Qty.	Description
	1	CM3-8 A-R-G-E-AQQE  Product No.: On request Compact, reliable, horizontal, multistage, end-suction centrifugal pump with axial suction port and radial discharge port. Pump materials in contact with the liquid are in high-grade stainless steel. The mechanical shaft seal is a special designed, unbalanced O-ring seal. Pipework connection is via internal Whitworth pipe threads, Rp (ISO 7/1). The pump is fitted with a 1-phase, foot-mounted, fan-cooled asynchronous motor. Further product details Pump and motor are integrated in a compact and user-friendly design. The pump is fitted to a low base plate, making it ideal for installation in systems where compactness is important. The state-of-the-art design and materials of the shaft seal ensure high wear resistance, improved sticking and dry-running capabilities and long operating life. Servicing the pump requires no special service tools. Service parts are in stock for quick delivery and are available as kits, single parts or bulk. Service videos are available on www.youtube.com. Pump A combination of a stop ring and a Nord-lock® washer secures a tight and reliable fixation of the impeller spacing pipes to the splined pump shaft. It is possible to remove and fit the hydraulic parts from the pump side. The inlet and outlet port are integrated in the pump sleeve. The inlet part, chambers and discharge part are hold together by four staybolts and a retaining flange. The pump is fitted with an unbalanced O-ring seal with a rigid torque-transmission system. It has a fixed seal driver ensuring a reliable rotation of all parts. The dynamic secondary seal is an O-ring. Primary seal: • Rotating seal ring material: silicon carbide (SiC) • Stationary seat material: silicon carbide (SiC) This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles. Secondary seal material: EPDM (ethylene-propylene rubber) EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils.  The pump shaft is connected to the motor shaft through a left thread and tight fit. The shaft cannot be dismantled. Motor The motor is a totally enclosed, fan-cooled motor with principal dimensions to EN 50347. Electrical tolerances comply with EN 60034. The motor has built-in thermal protection (PTO current and temperature sensors) in accordance with IEC 60034-11 and requires no further motor protection. The protection reacts to both slow- and quick-rising temperatures, e.g. constant overload and stalled conditions. As the thermal protection incorporates automatic reset, the motor must be connected in a way which ensures that the automatic reset cannot cause accidents. Technical data

Position	Qty.	Description
		Liquid: Pumped liquid: Water Liquid temperature range: -20 .. 120 °C Liquid temperature during operation: 20 °C Density: 998.2 kg/m³ Technical: Rated flow: 3.1 m³/h Rated head: 55.7 m Primary shaft seal: AQQE Approvals on nameplate: CE,WRAS,ACS,TR,EAC Curve tolerance: ISO9906:2012 3B Materials: Pump housing: Stainless steel DIN W.-Nr. 1.4401 AISI 316 Impeller: Stainless steel DIN W.-Nr. 1.4401 AISI 316 Rubber: EPDM Installation: Maximum ambient temperature: 55 °C Maximum operating pressure: 16 bar Max pressure at stated temp: 10 bar / 120 °C 16 bar / 90 °C Flange standard: WHITWORTH THREAD RP Pump inlet: Rp 1 Pump outlet: Rp 1 Electrical data: Motor type: 80B Rated power - P2: 0.9 kW Mains frequency: 50 Hz Rated voltage: 1 x 220-240 V Service factor: 1 Rated current: 5.4-5.0 A Starting current: 430 % Rated speed: 2750-2790 rpm Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F Others: Minimum efficiency index, MEI ≥: 0.7 Net weight: 16.8 kg Gross weight: 19.3 kg


On request CM3-8 A-R-G-E-AQQE 50 Hz

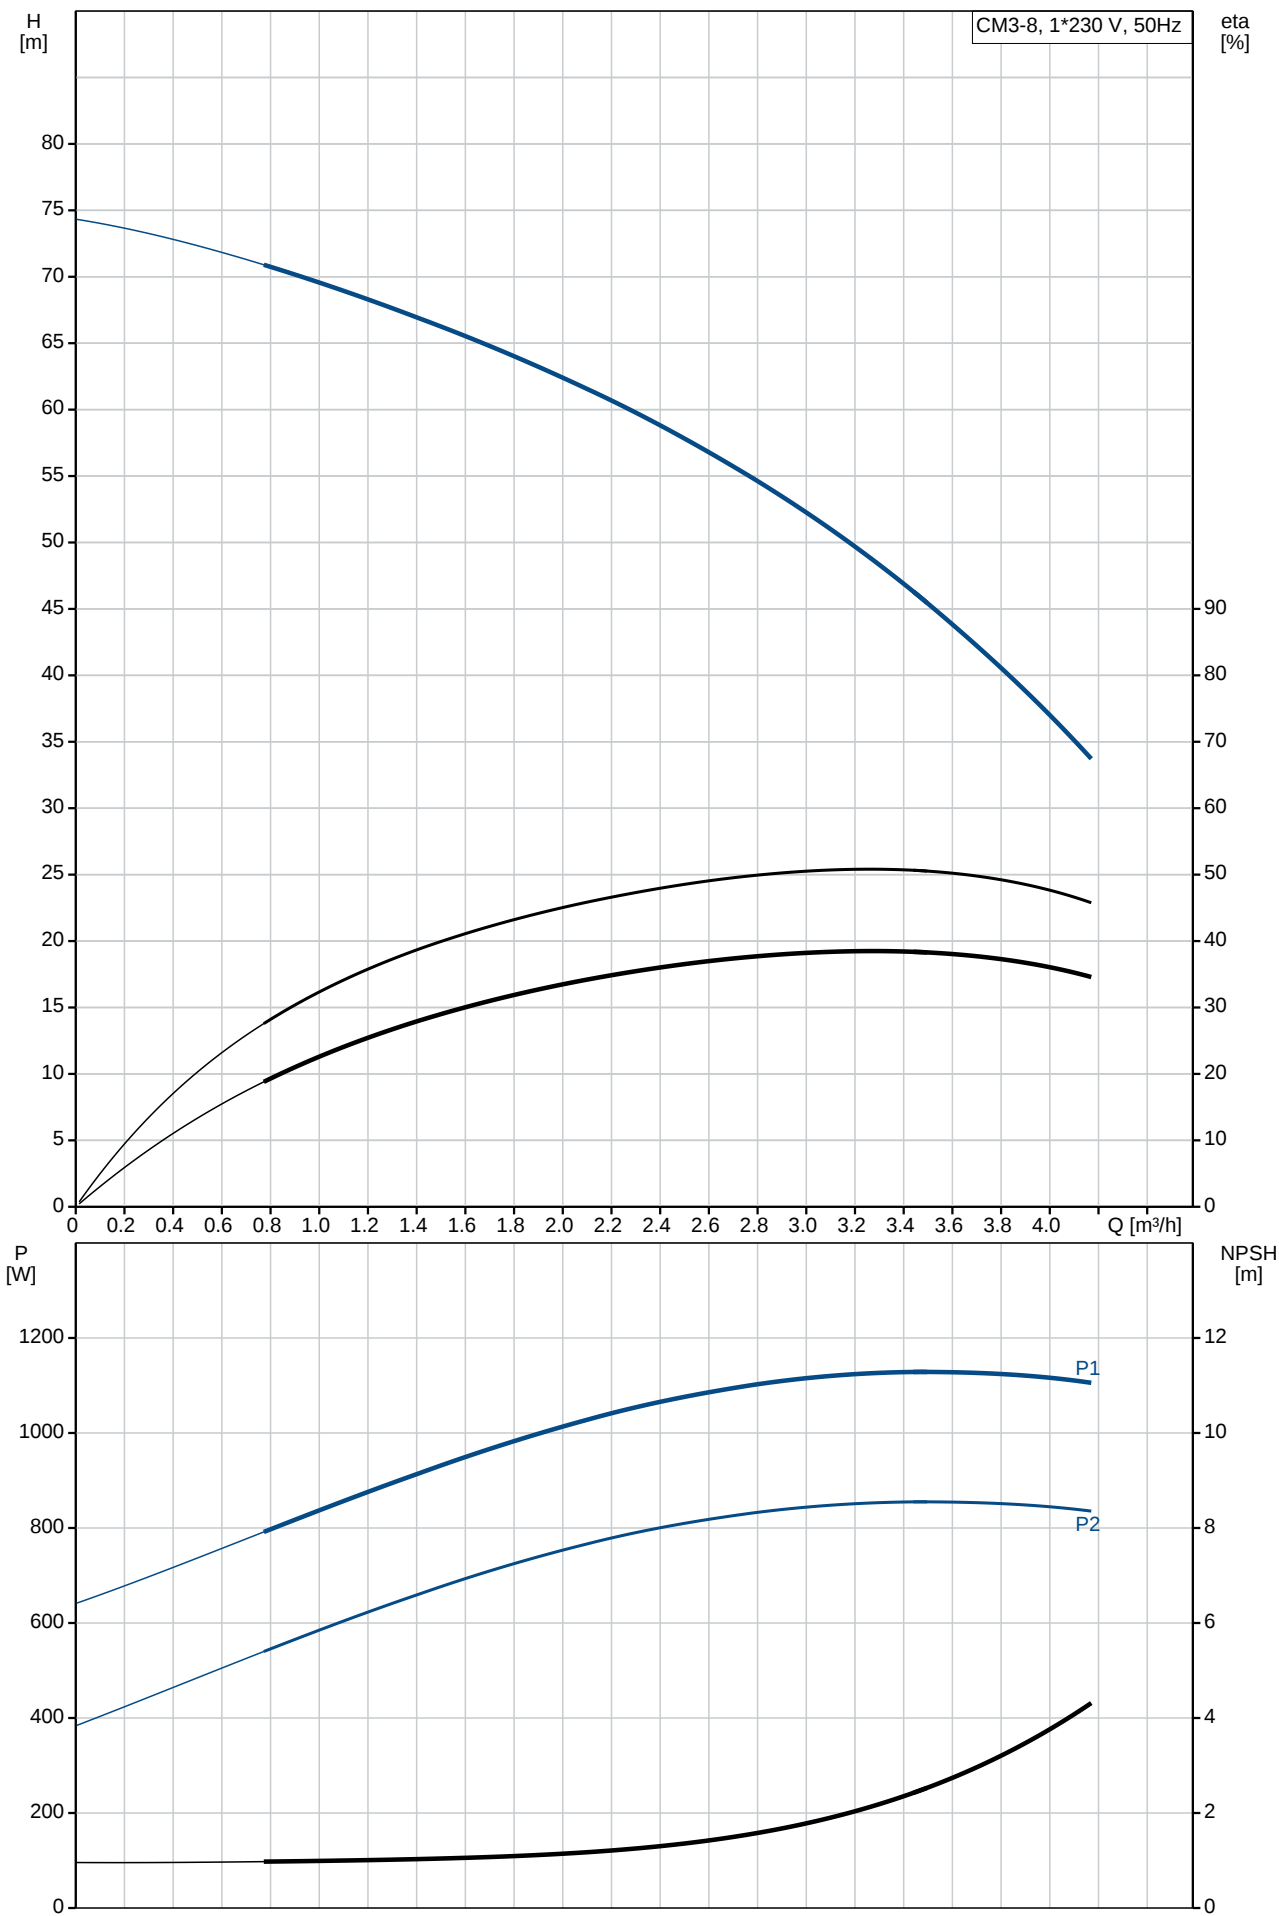


Description	Value
General information:	
Product name:	CM3-8 A-R-G-E-AQQE
Product No:	On request
EAN number:	On request
Technical:	
Rated flow:	3.1 m³/h
Rated head:	55.7 m
Impellers:	8
Primary shaft seal:	AQQE
Approvals on nameplate:	CE,WRAS,ACS,TR,EAC
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
Materials:	
Pump housing:	Stainless steel
	DIN W.-Nr. 1.4401
	AISI 316
Impeller:	Stainless steel
	DIN W.-Nr. 1.4401
	AISI 316
Material code:	G
Rubber:	EPDM
Code for rubber:	E
Installation:	
Maximum ambient temperature:	55 °C
Maximum operating pressure:	16 bar
Max pressure at stated temp:	10 bar / 120 °C
	16 bar / 90 °C
Flange standard:	WHITWORTH THREAD RP
Pump inlet:	Rp 1
Pump outlet:	Rp 1
Connect code:	R
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-20 .. 120 °C
Liquid temperature during operation:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	80B
Rated power - P2:	0.9 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Service factor:	1
Rated current:	5.4-5.0 A
Starting current:	430 %
Rated speed:	2750-2790 rpm
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Motor protec:	TP211
Others:	
Minimum efficiency index, MEI ≥:	0.7
Net weight:	16.8 kg
Gross weight:	19.3 kg

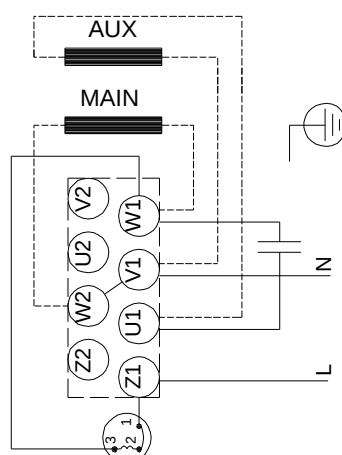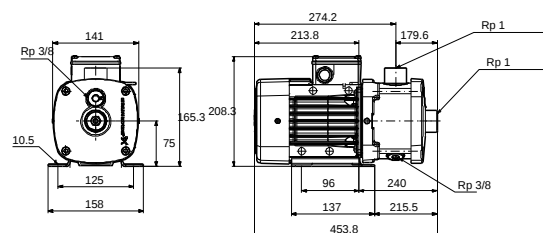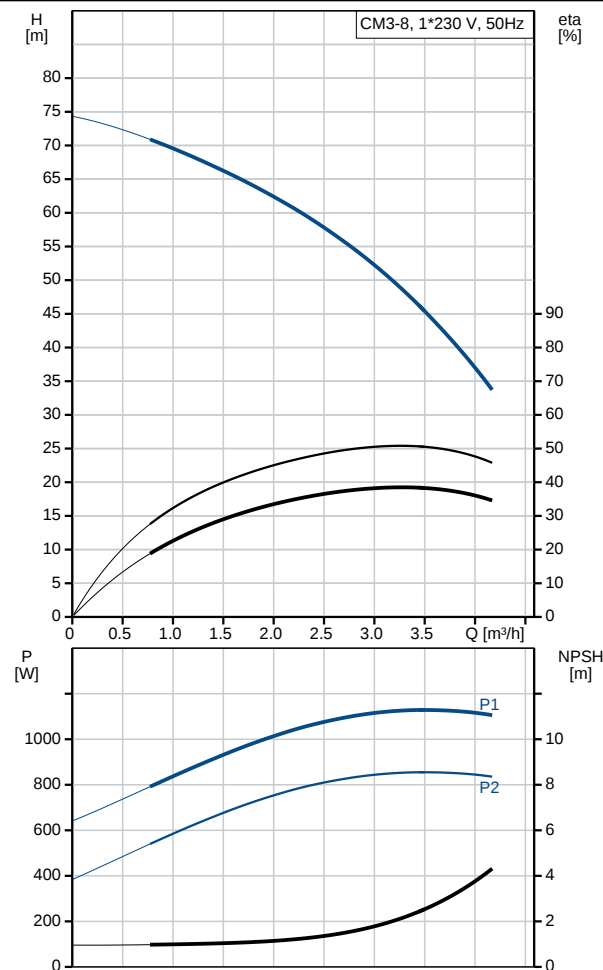

On request CM3-8 A-R-G-E-AQQE 50 Hz

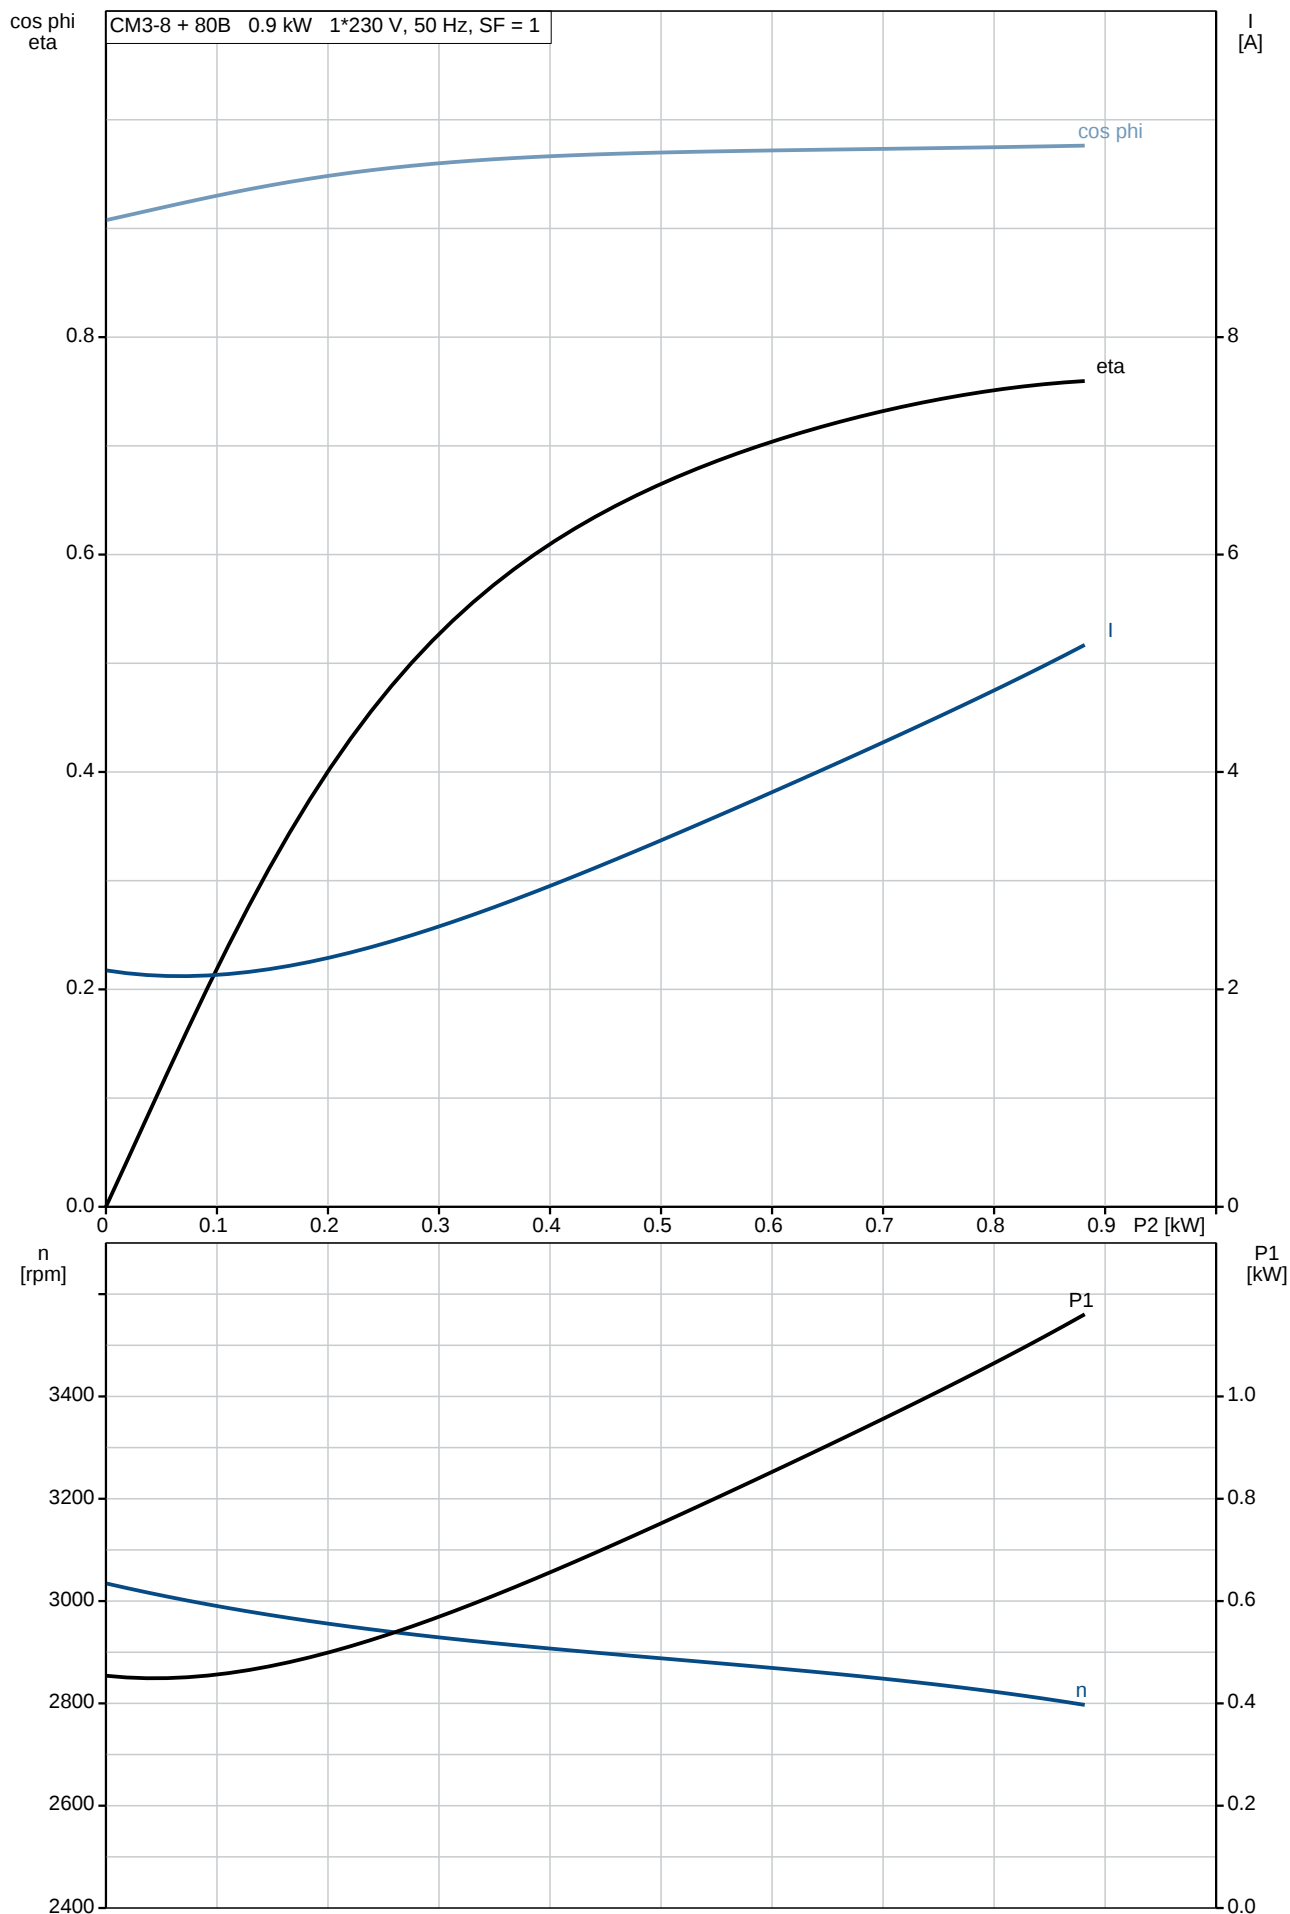

On request CM3-8 A-R-G-E-AQQE 50 Hz

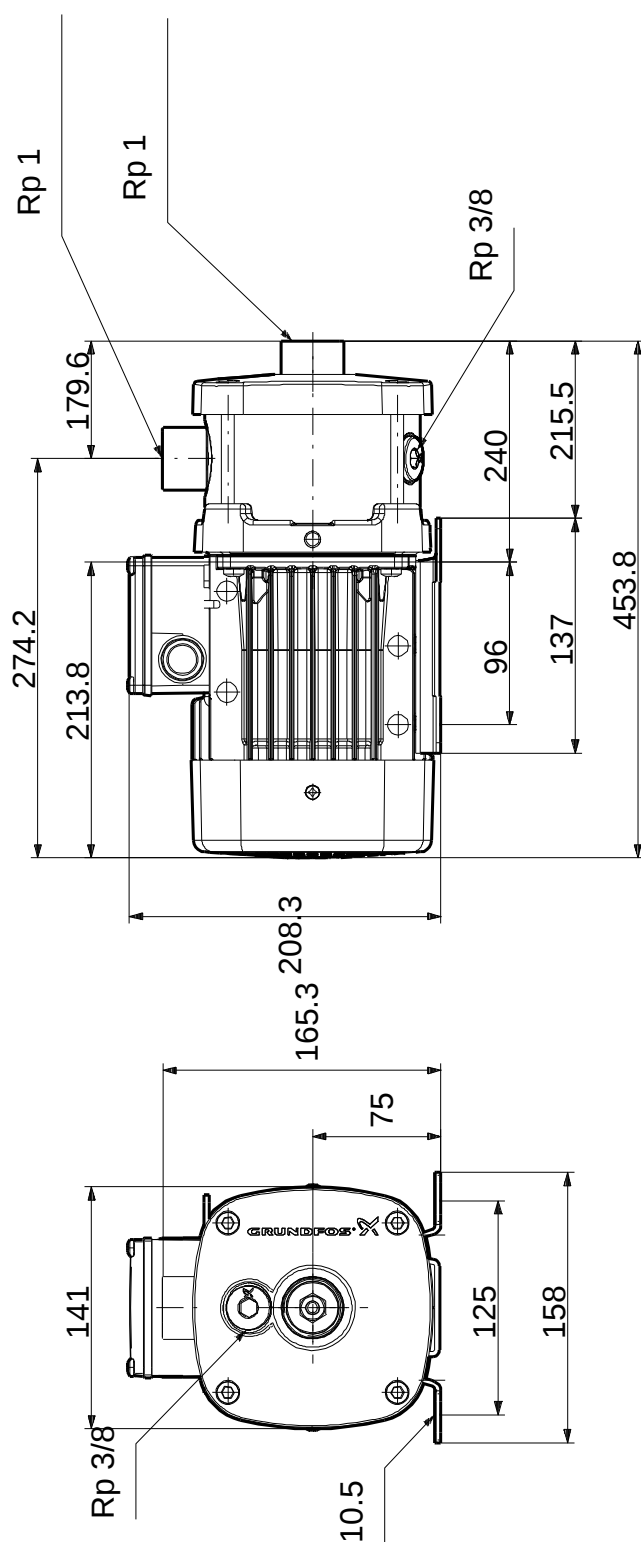

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Exploded view



Sectional drawing (TM058200 for TPE2,TPE3)



TM058200

Exploded view (TM057026 for MGE model H/I)



Parts list CM3-8, Product No. On request
Valid from 9.2.2009 (0907)

Pos	Description	Annotation	Données de classification	Référence	Quantité	Unité
-	MG80B				1	pcs
	Jumper				1	
	Protector cpl.				1	
alt. 1.1	Stator				1	
alt. 1.2	Stator				1	
28	Pan head screw				4	
51	Shaft w/rotor				1	
79	Gasket				1	
150	Stator housing				1	
152	Pan head thread forming screw				4	
154	Ball bearing				1	
154	Ball bearing		Designation: 6204.2Z.C3.SYN		1	
155	Bearing cover				1	
156b	Motor flange				1	
156d	Gasket		Internal diameter: 114,80		1	
			Outer diameter: 121,20			
			Thickness: 0,25			
158	Waved washer				1	
158.a	O-ring				1	
159	O-ring		Diameter: 32		1	
			Material type: NBR			
			Thickness: 2			
159a	Seal ring				1	
164	Terminal box cover w/gasket				1	
164a	Terminal box w/gasket				1	
166	Pan head screw				4	
173	Pan head thread forming screw		Designation: COMBI TORX T25		1	
173a	Base				1	
176	Terminal				1	
	Cross recess countersunk screw				4	pcs
- 4	Chamber cpl.				5	pcs
4a	Intermediate chamber				1	
45	Neck ring				1	
65	Neck ring retainer				1	
- 4.d	Chamber cpl.				1	pcs
	Chamber				1	
	Retainer for seal ring				1	
	Guide vane				6	
	Plate				1	
	Vane				1	
45	Neck ring				1	
65	Neck ring retainer				1	
- 4a	Chamber w. bearing cpl.				1	pcs
4a	Intermediate chamber				1	
45	Neck ring				1	
65	Neck ring retainer				1	
- 5a	Chamber cpl.				1	pcs
4a	Intermediate chamber				1	
45	Neck ring				1	
65	Neck ring retainer				1	
5a	Chamber, empty				1	pcs
6.a	Flange				1	pcs
16	Collar sleeve cpl.				1	pcs
- 25	Drain plug cpl.				2	pcs
11	O-ring		Diameter: 18,5		1	
			Material type: EPDM			
			Thickness: 2			
25	Plug				1	
26	Hex socket head cap screw		Length (mm): 185		4	pcs

Pos	Description	Annotation	Données de classification	Référence	Quantité	Unité
31	O-ring		Thread: M8 Diameter: 114 Material type: EPDM Thickness: 3,9		1	pcs
- 32	Cover				1	pcs
	Cover plate				1	
	Plate				1	
36	Lock nut		Thread: M8		1	pcs
47.a	Bearing ring				1	pcs
49	Impeller cpl.				8	pcs
51	Pump shaft		Diameter: D12		1	pcs
64	Spacing pipe				6	pcs
64.a	Spacing pipe				1	pcs
64.c	Clamp				1	pcs
66	Wedge lock washer				1	pcs
76	Nameplate				2	pcs
- 105	Shaft seal				1	pcs
102	O-ring		Diameter: 17,86 Material type: EPDM Thickness: 2,62		1	
103	Seal ring, stationary				1	
104	Seal ring, rotating				1	
107	O-ring				1	
108	Compression spring				1	
111	Retainer				1	
112	Driver for shaft seal				1	
111.a	Stop ring				1	pcs
151	Fan cover				1	pcs
152	Pan head thread forming screw				2	pcs
156	Fan				1	pcs
191	Base plate				1	pcs

Disclaimer: The information about the Grundfos pump in this document may be outdated.

Data may be subject to alterations without further notice.

Please contact us to verify the data above is still accurate/up-to-date.

All information is copyright Grundfos.



info@lenntech.com

<https://www.lenntech.com>

tel. +31 152 610 900

fax. +31 152 616 289