

CM10-6 A-R-I-E-AQQE F-A-A-N

Grundfos pump 97644355



Thank you for your interest in our products. Please contact us for more information, or visit our website


<https://www.lenntech.com/grundfos/CMBASIS/97644355/CM10-6-A-R-I-E-AQQE.html>

info@lenntech.com


tel. +31 152 610 900

fax. +31 152 616 289





Position	Qty.	Description
	1	CM10-6 A-R-I-E-AQQE  Product No.: On request Compact, reliable, horizontal, multistage, end-suction centrifugal pump with axial suction port and radial discharge port. Pump materials in contact with the liquid are in stainless steel. The mechanical shaft seal is a special designed, unbalanced O-ring seal. Pipework connection is via internal Whitworth pipe threads, Rp (ISO 7/1). The pump is fitted with a 3-phase, foot-mounted, fan-cooled asynchronous motor. Further product details Pump and motor are integrated in a compact and user-friendly design. The pump is fitted to a low base plate, making it ideal for installation in systems where compactness is important. The state-of-the-art design and materials of the shaft seal ensure high wear resistance, improved sticking and dry-running capabilities and long operating life. Servicing the pump requires no special service tools. Service parts are in stock for quick delivery and are available as kits, single parts or bulk. Service videos are available on www.youtube.com. Pump A combination of a stop ring and a Nord-lock® washer secures a tight and reliable fixation of the impeller spacing pipes to the splined pump shaft. It is possible to remove and fit the hydraulic parts from the pump side. The inlet and outlet port are integrated in the pump sleeve. The inlet part, chambers and discharge part are hold together by four staybolts and a retaining flange. The pump is fitted with an unbalanced O-ring seal with a rigid torque-transmission system. It has a fixed seal driver ensuring a reliable rotation of all parts. The dynamic secondary seal is an O-ring. Primary seal: • Rotating seal ring material: silicon carbide (SiC) • Stationary seat material: silicon carbide (SiC) This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles. Secondary seal material: EPDM (ethylene-propylene rubber) EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils.  The pump shaft is connected to the motor shaft through a left thread and tight fit. The shaft cannot be dismantled. Motor The motor is a totally enclosed, fan-cooled motor with principal dimensions to EN 50347. Electrical tolerances comply with EN 60034. The motor efficiency is classified as IE2 in accordance with IEC 60034-30. The motor has thermistors (PTC sensors) in the windings in accordance with DIN 44081/DIN 44082. The protection reacts to both slow- and quick-rising temperatures, e.g. constant overload and stalled conditions. Thermal switches must be connected to an external control circuit in a way which ensures that the automatic reset cannot cause accidents. The motors must be connected to a motor-protective circuit breaker according to local regulations.

Position	Qty.	Description
		An installation indicator is fitted to the motor fan cover. Based on the motor cooling air, it indicates the direction of rotation of the motor. The motor is fitted with a directional sticker.  The motor can be connected to a variable speed drive for adjustment of pump performance to any duty point. Grundfos CUE offers a range of variable speed drives. Please find more information in Grundfos Product Center. Technical data Liquid: Pumped liquid: Water Liquid temperature range: -20 .. 120 °C Liquid temperature during operation: 20 °C Density: 998.2 kg/m³ Technical: Rated flow: 10 m³/h Rated head: 78.3 m Primary shaft seal: AQQE Approvals on nameplate: CE,WRAS,ACS,TR,EAC Curve tolerance: ISO9906:2012 3B Materials: Pump housing: Stainless steel DIN W.-Nr. 1.4301 AISI 304 Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304 Rubber: EPDM Installation: Maximum ambient temperature: 55 °C Maximum operating pressure: 10 bar Max pressure at stated temp: 10 bar / 120 °C Flange standard: WHITWORTH THREAD RP Pump inlet: Rp 1 1/2 Pump outlet: Rp 1 1/2 Electrical data: Motor type: 100LB IE Efficiency class: IE2 Rated power - P2: 4 kW Mains frequency: 50 Hz Rated voltage: 3 x 220-240D/380-415Y V Service factor: 1 Rated current: 14,0-13,2/8,20-7,80 A Starting current: 850-950 % Rated speed: 2900-2920 rpm Motor efficiency at full load: 85.8 % Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F Others: Minimum efficiency index, MEI ≥: 0.52 Net weight: 37.7 kg Gross weight: 40.2 kg


On request CM10-6 A-R-I-E-AQQE 50 Hz

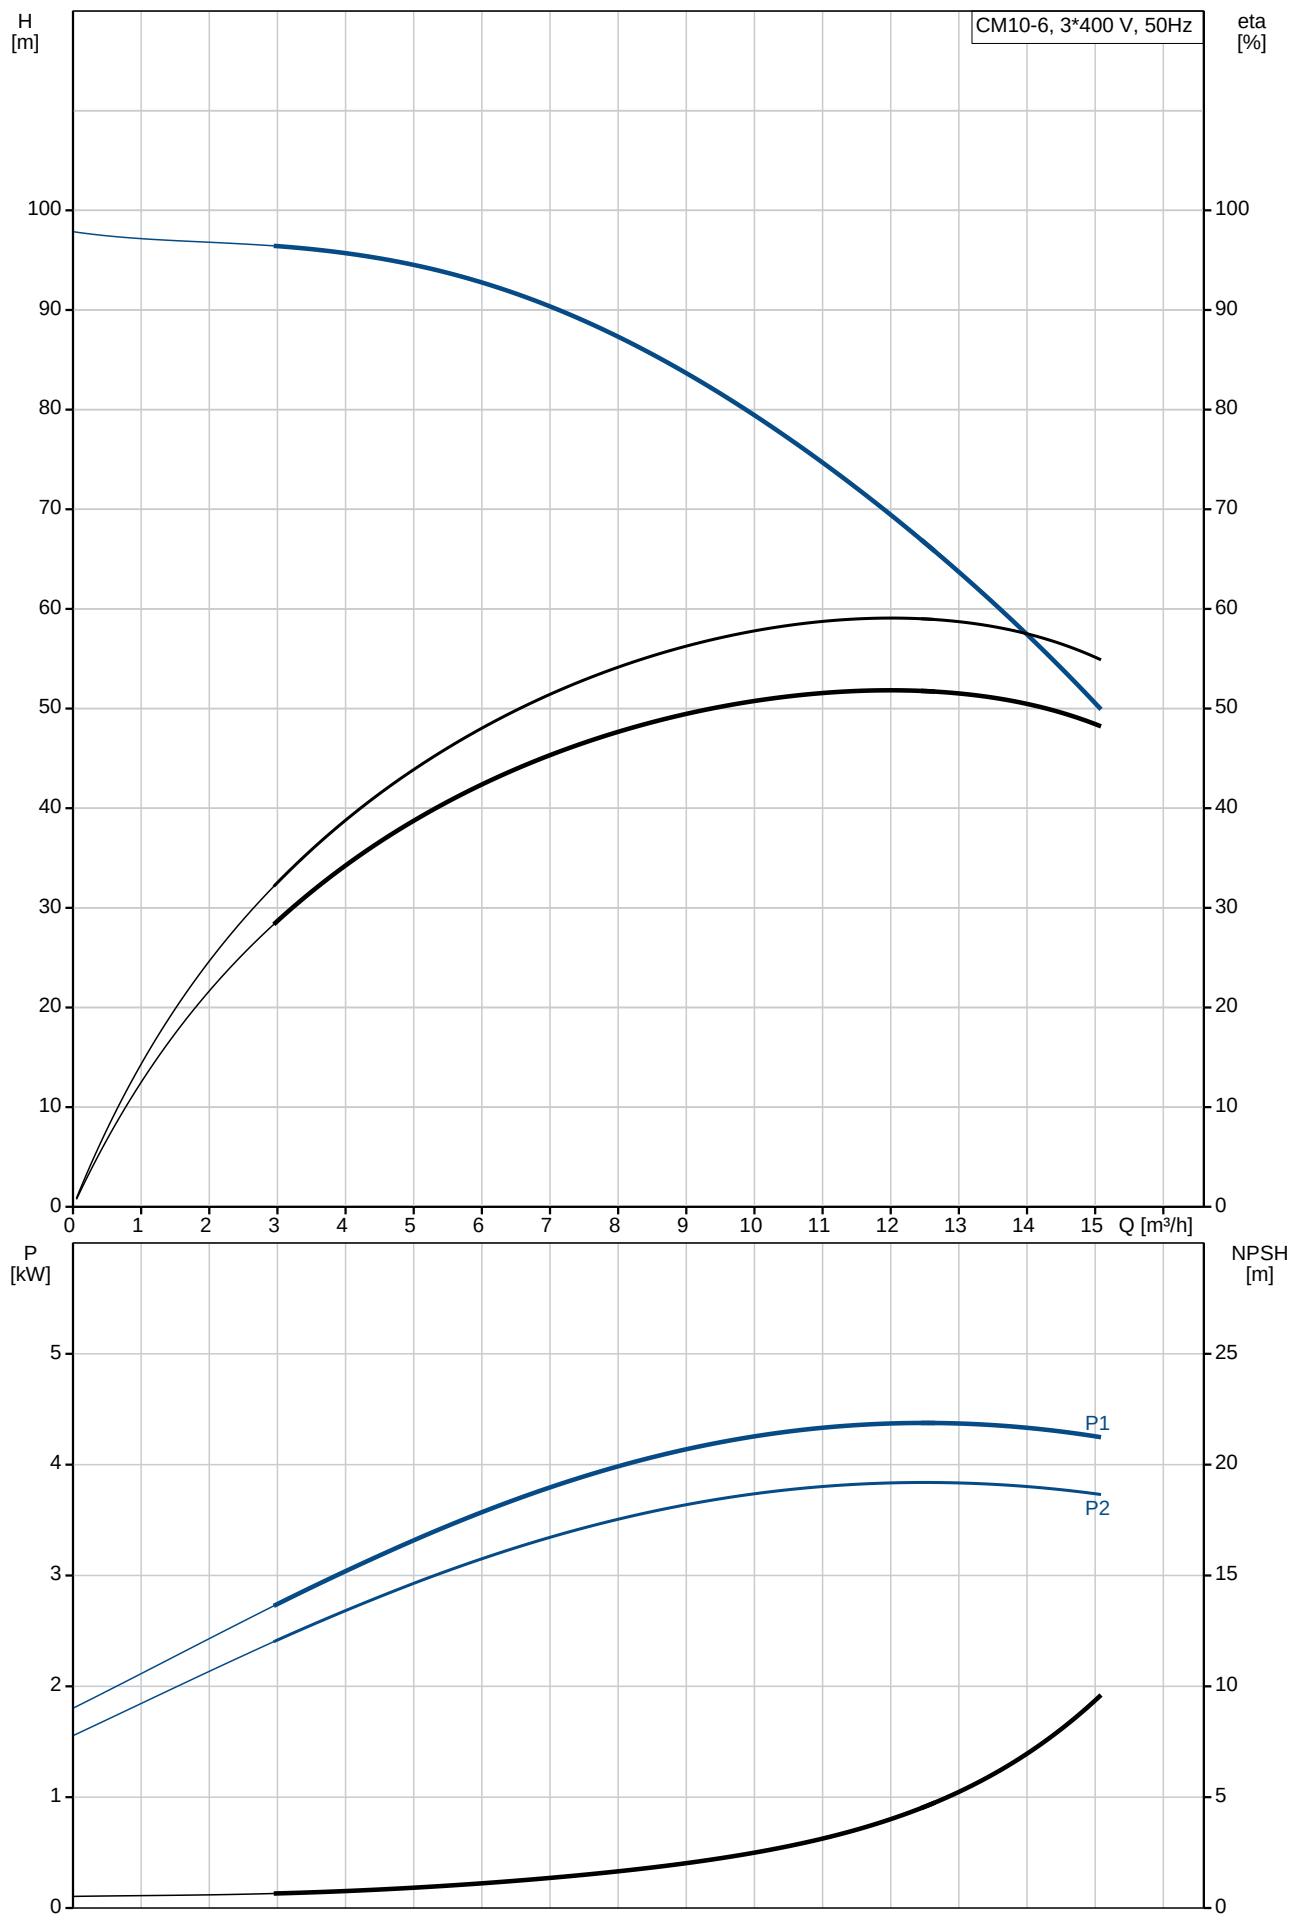


Description	Value
General information:	
Product name:	CM10-6 A-R-I-E-AQQE
Product No:	On request
EAN number:	On request
Technical:	
Rated flow:	10 m³/h
Rated head:	78.3 m
Impellers:	6
Primary shaft seal:	AQQE
Approvals on nameplate:	CE,WRAS,ACS,TR,EAC
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
Materials:	
Pump housing:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Material code:	I
Rubber:	EPDM
Code for rubber:	E
Installation:	
Maximum ambient temperature:	55 °C
Maximum operating pressure:	10 bar
Max pressure at stated temp:	10 bar / 120 °C
Flange standard:	WHITWORTH THREAD RP
Pump inlet:	Rp 1 1/2
Pump outlet:	Rp 1 1/2
Connect code:	R
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	-20 .. 120 °C
Liquid temperature during operation:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	100LB
IE Efficiency class:	IE2
Rated power - P2:	4 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 220-240D/380-415Y V
Service factor:	1
Rated current:	14,0-13,2/8,20-7,80 A
Starting current:	850-950 %
Rated speed:	2900-2920 rpm
Motor efficiency at full load:	85.8 %
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Motor protec:	TP211
Others:	
Minimum efficiency index, MEI ≥:	0.52
Net weight:	37.7 kg
Gross weight:	40.2 kg

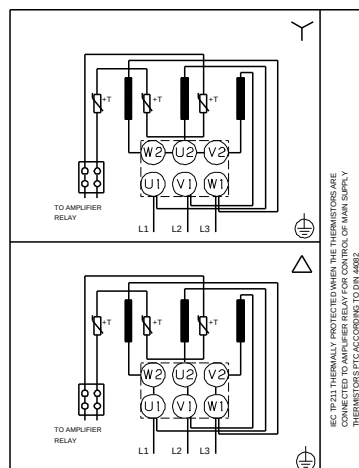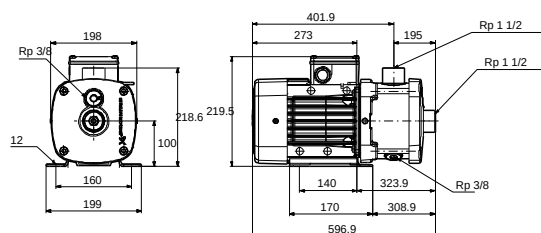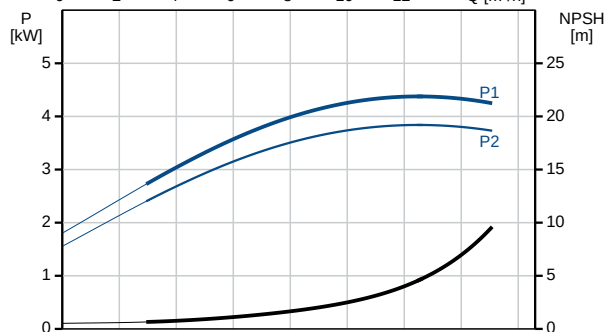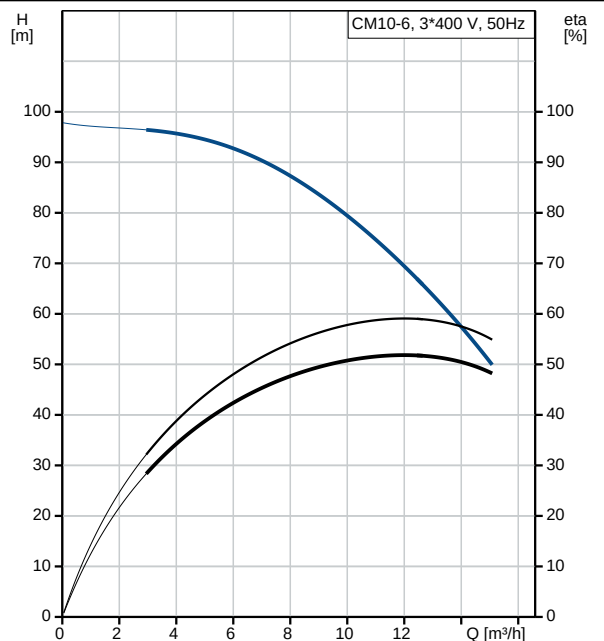

On request CM10-6 A-R-I-E-AQQE 50 Hz

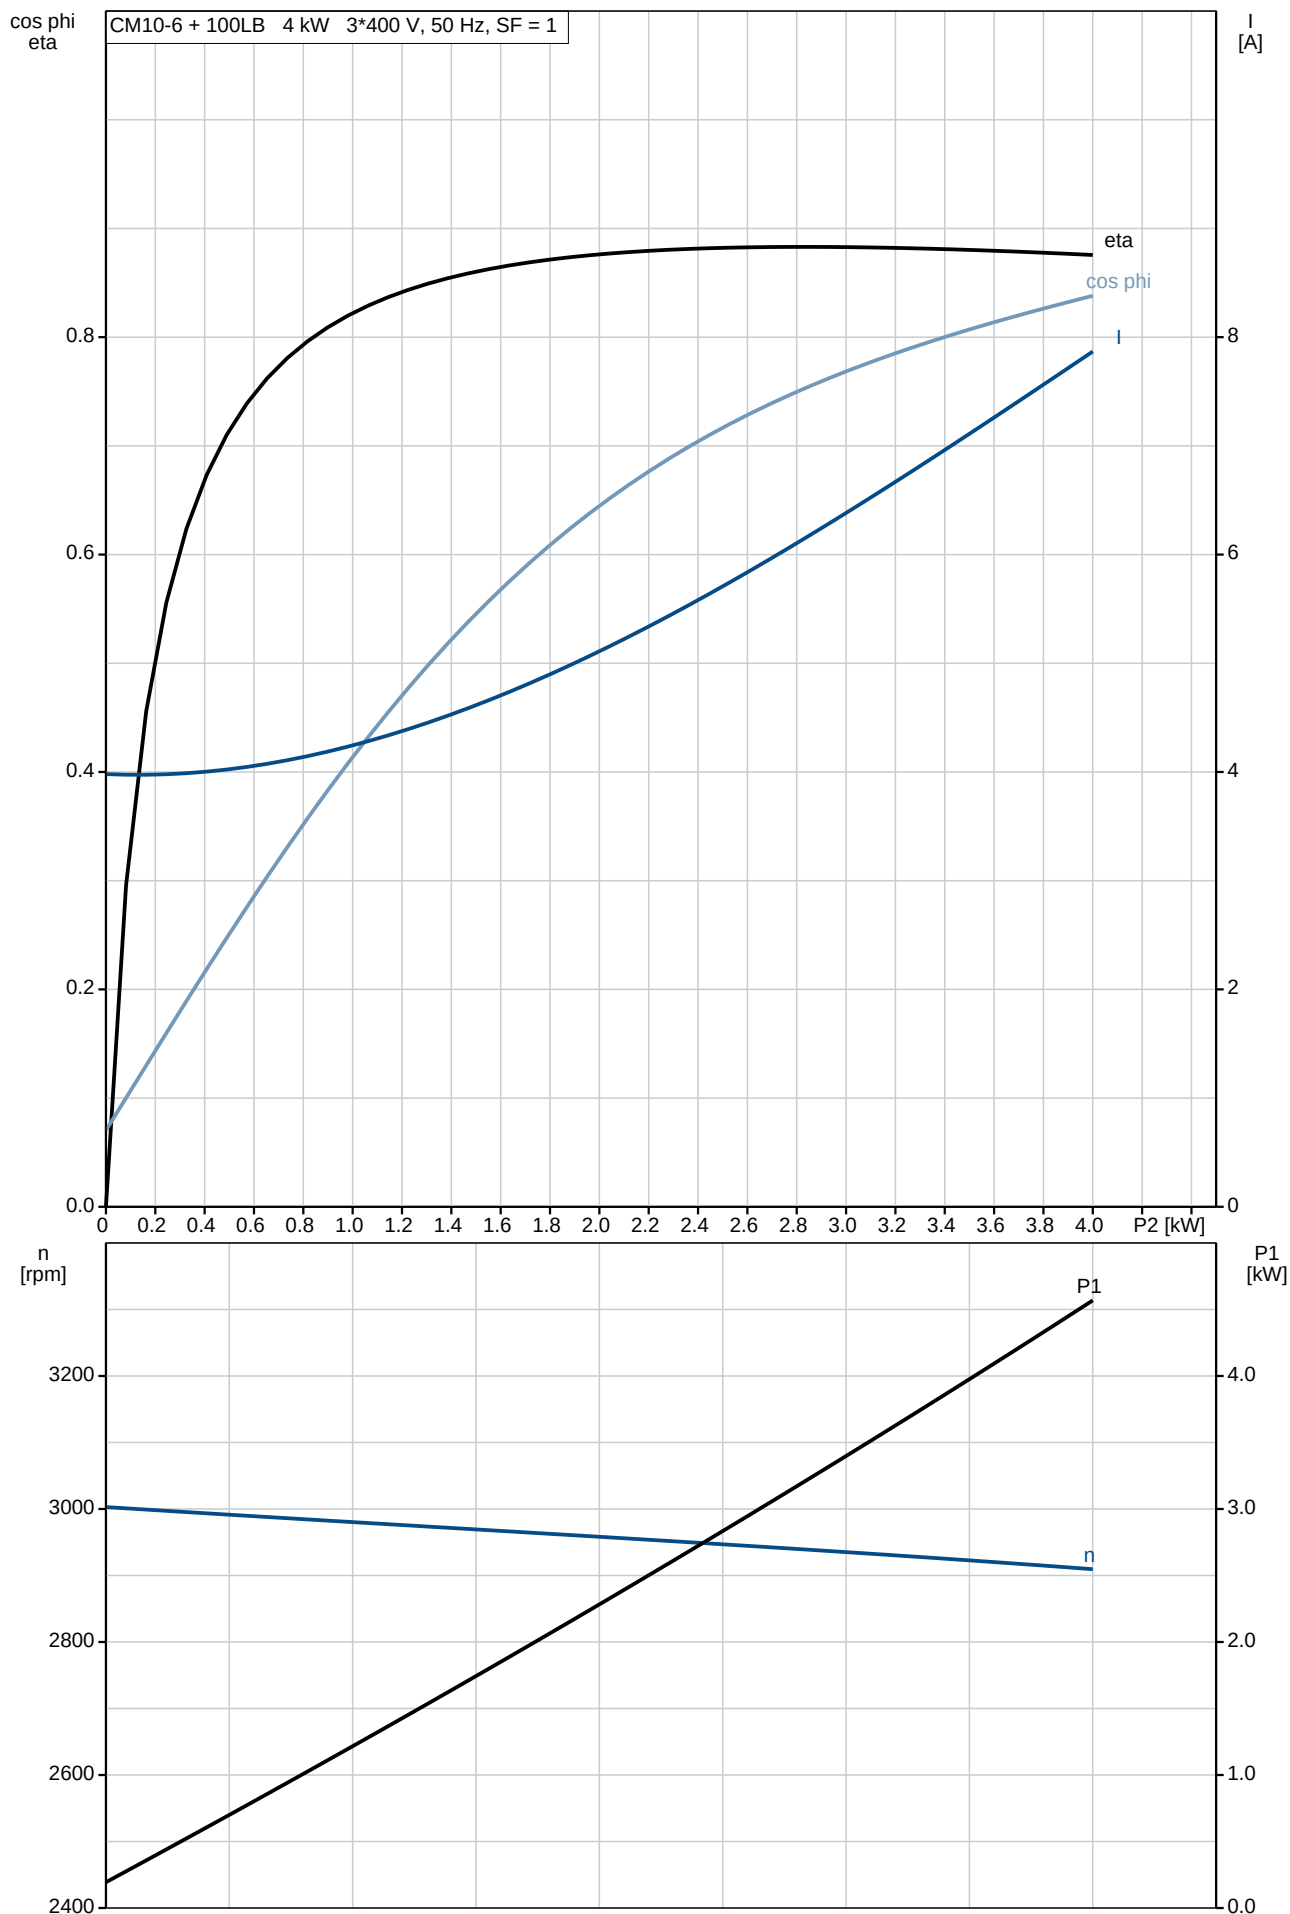


On request CM10-6 A-R-I-E-AQQE 50 Hz

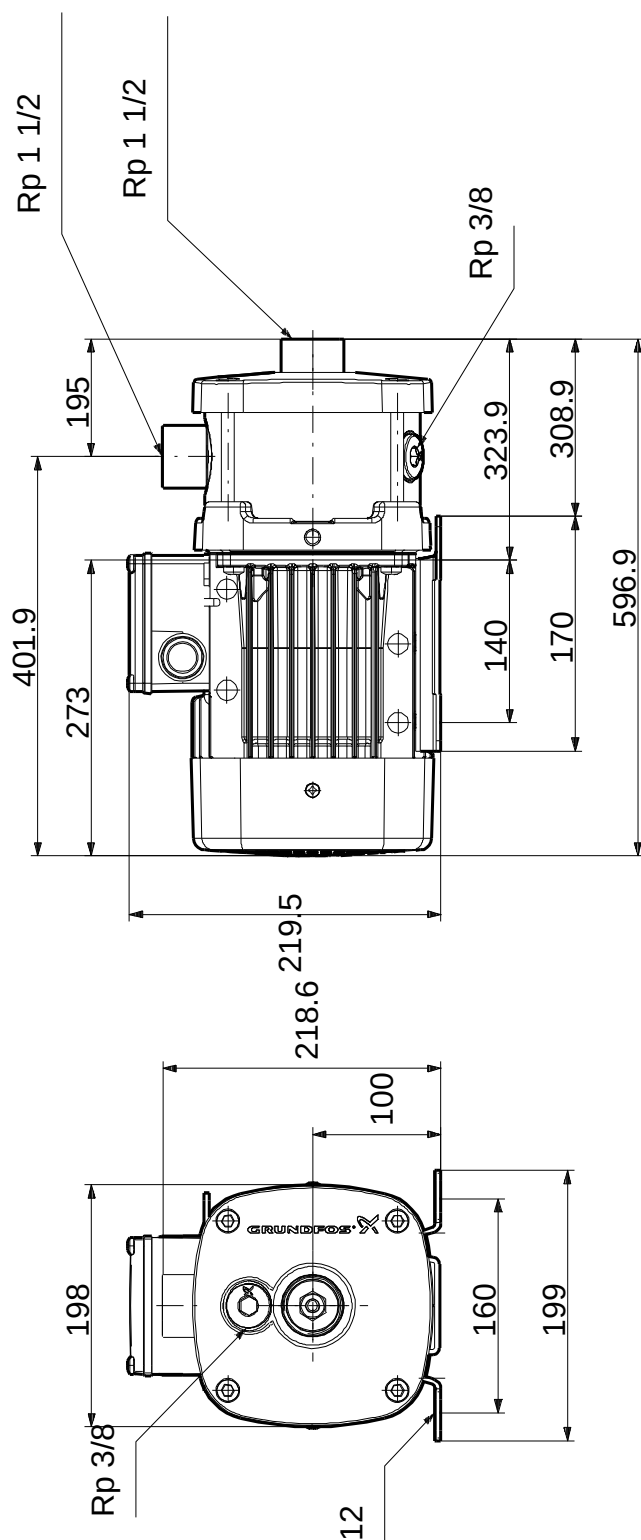


Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Exploded view

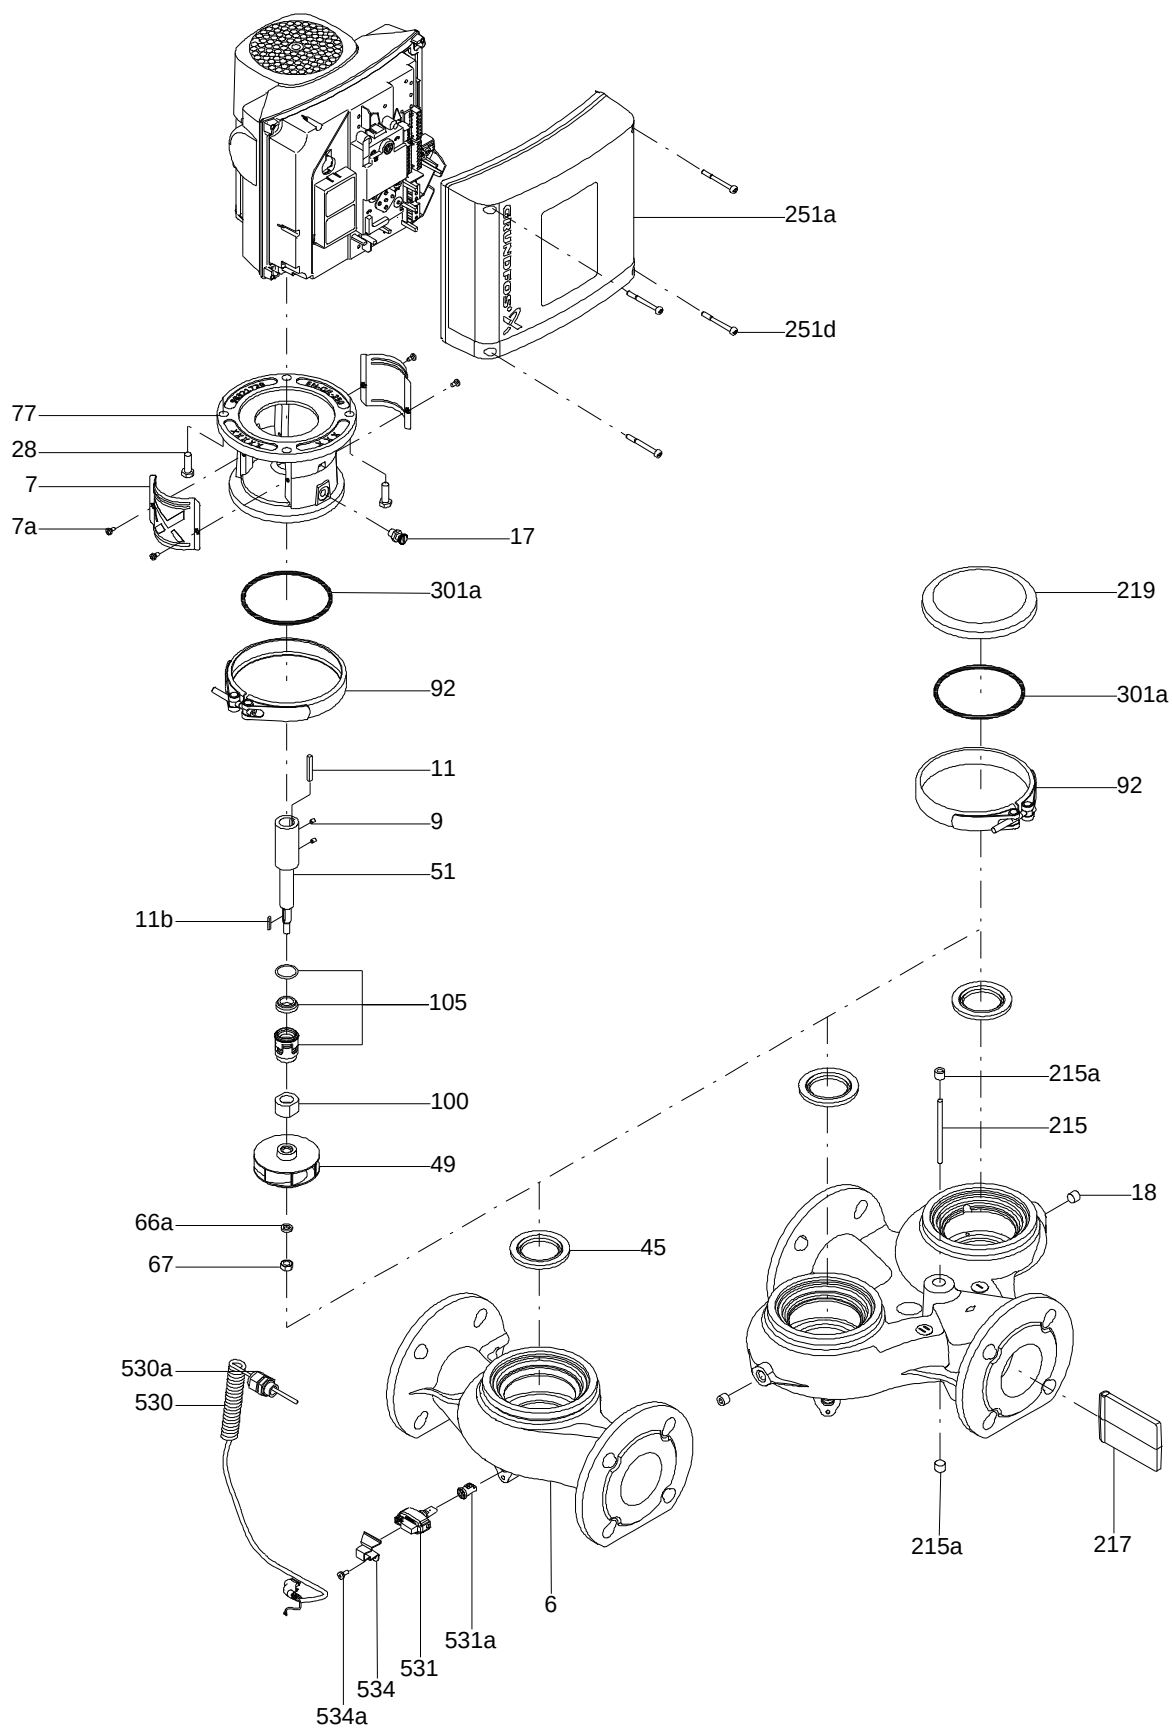


Sectional drawing (TM058200 for TPE2,TPE3)

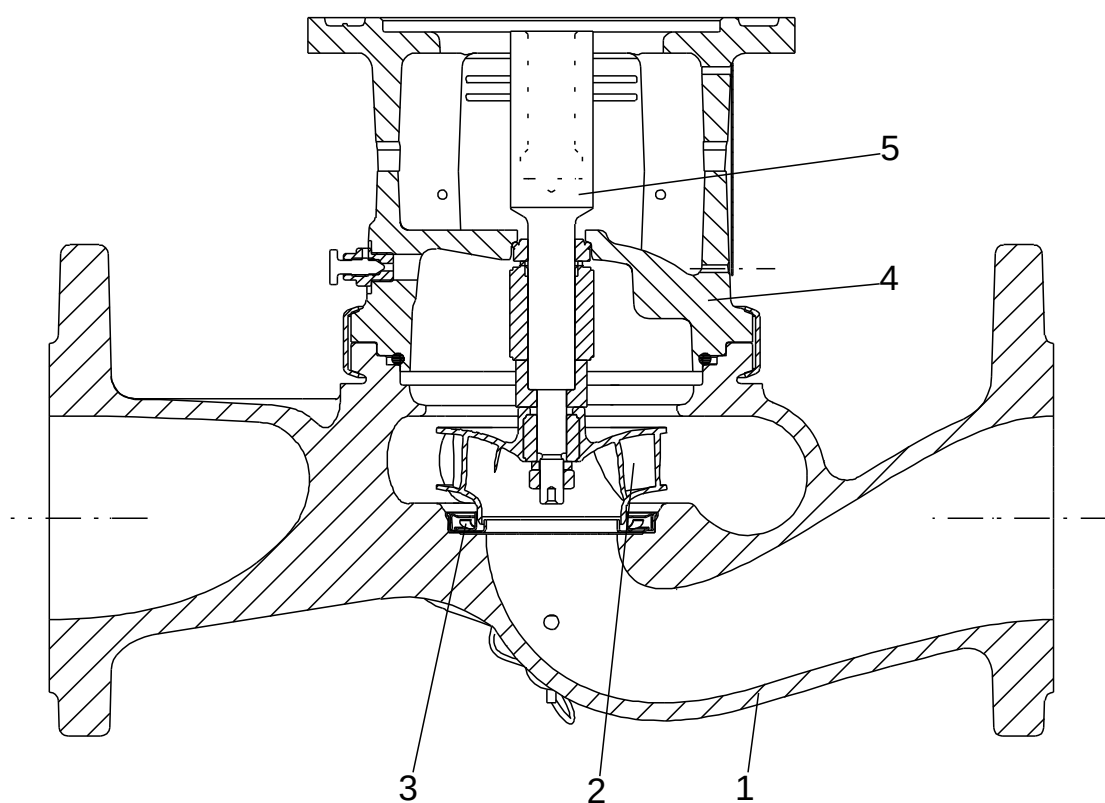

TM058200

Exploded view (TM057026 for MGE model H/I)

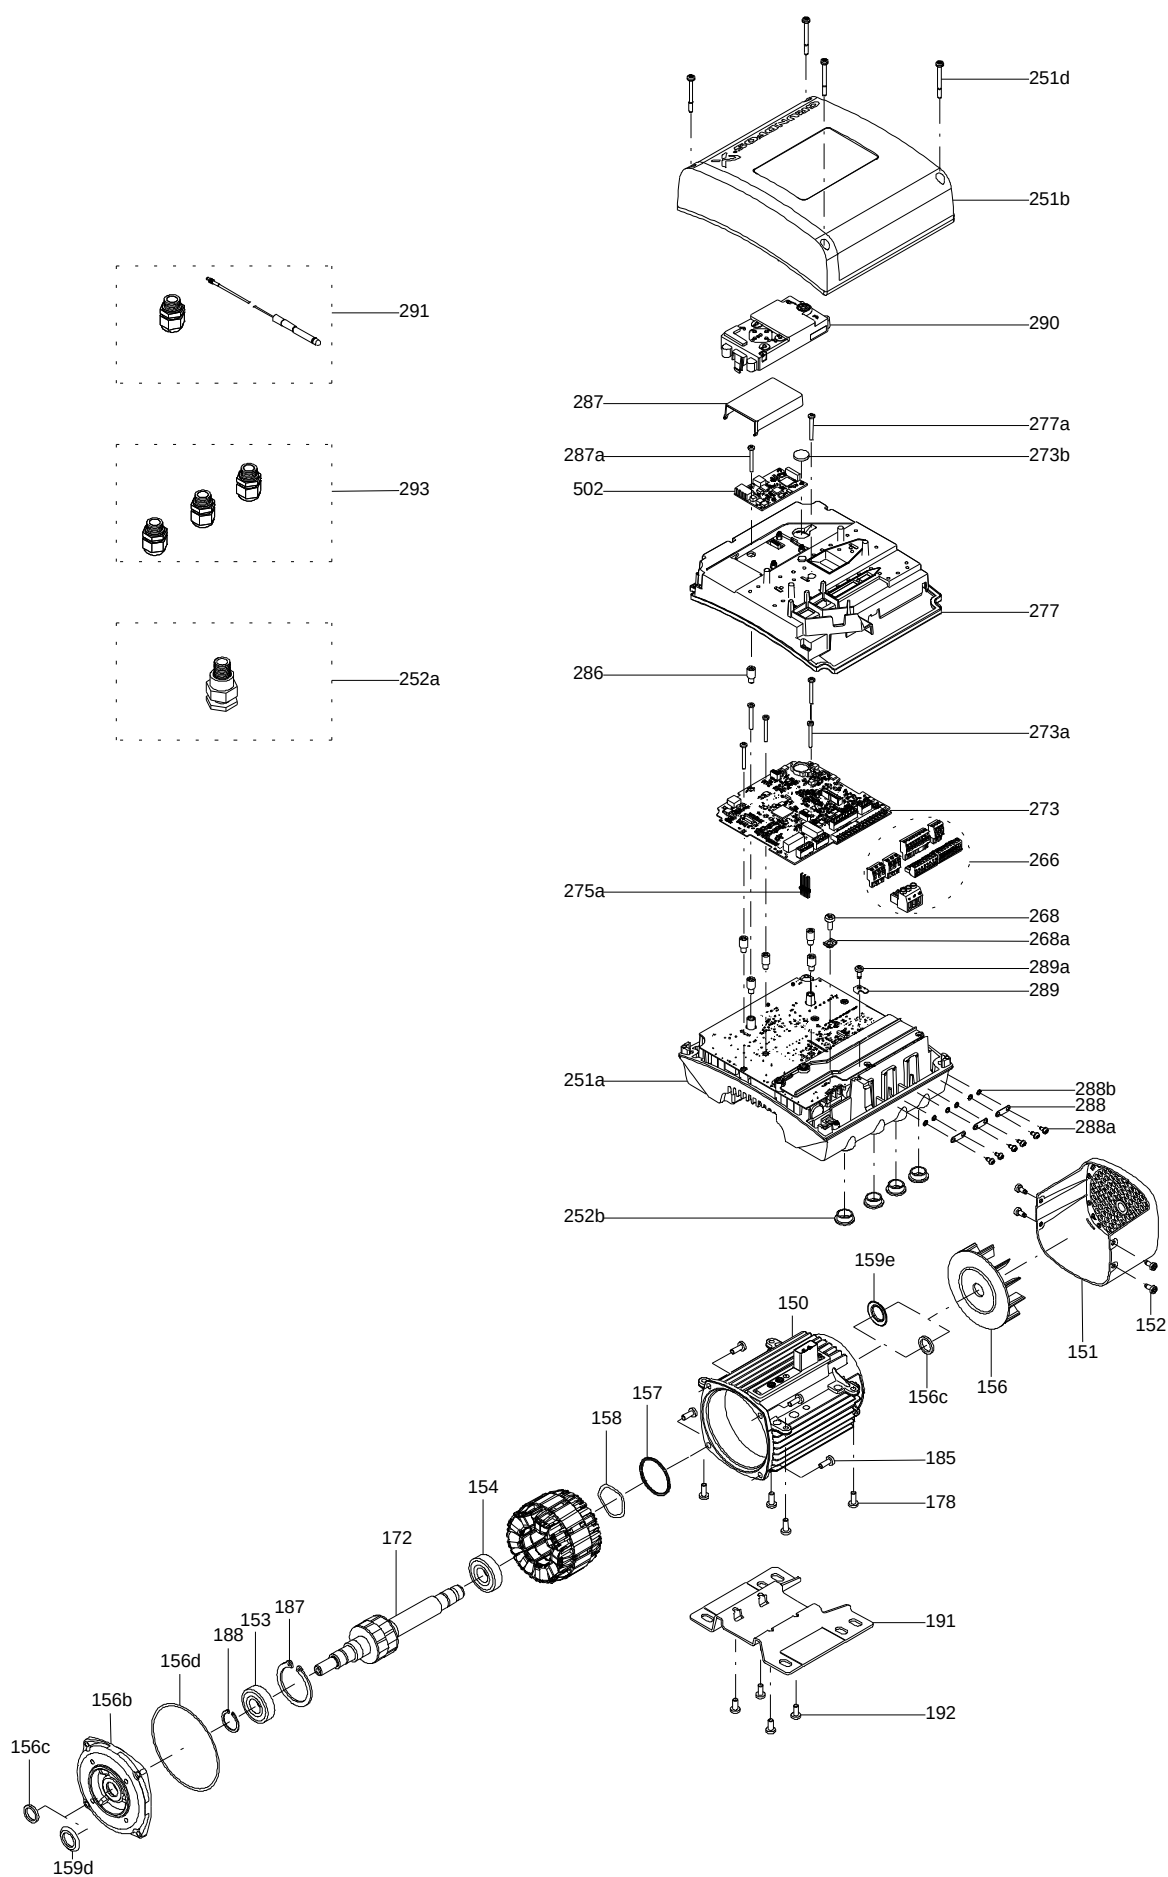

Parts list CM10-6, Product No. On request
Valid from 9.2.2009 (0907)

Pos	Description	Annotation	Données de classification	Référence	Quantité	Unité
	MG100LB				1	pcs
	Cross recess countersunk screw				4	pcs
- 4	Chamber cpl.				4	pcs
45	Seal ring				1	
65	Neck ring retainer				1	
- 4.a	Chamber w. bearing cpl.				1	pcs
	Seal ring				1	
	Guide vane				10	
	Bearing plate				1	
	Bearing bush				1	
	Sand Lifter				1	
3a	Chamber w/o guide vanes				1	
45	Seal ring				1	
65	Neck ring retainer				1	
4.d	Chamber				1	pcs
- 4f	Chamber				1	pcs
	Seal ring				1	
	Inlet part				1	
45	Seal ring				1	
65	Neck ring retainer				1	
6.a	Flange				1	pcs
16	Collar sleeve cpl.				1	pcs
- 25	Drain plug cpl.				2	pcs
11	O-ring		Diameter: 18,5 Material type: EPDM Thickness: 2		1	
25	Plug				1	
26	Hex socket head cap screw		Length (mm): 225 Thread: M8		4	pcs
31	O-ring		Diameter: 153 Material type: EPDM Thickness: 4,7		1	pcs
- 32	Cover plate				1	pcs
	Cover plate				1	
	Plate				1	
36	Lock nut		Thread: M8		1	pcs
47.a	Bearing ring				1	pcs
49	Impeller cpl.				6	pcs
51	Pump shaft		Diameter: D16		1	pcs
64	Spacing pipe				4	pcs
64.a	Spacing pipe				1	pcs
64.a	Spacing pipe				1	pcs
64.a	Spacing pipe				1	pcs
64.c	Clamp				1	pcs
66	Wedge lock washer				1	pcs
76	Nameplate				2	pcs
- 105	Shaft seal				1	pcs
102	O-ring		Diameter: 22,00 Material type: EPDM Thickness: 2,75		1	
103	Seal ring, stationary				1	
104	Seal ring, rotating				1	
107	O-ring		Diameter: 15.5 Material type: EPDM Thickness: 3.18		1	
108	Compression spring				1	
111	Retainer				1	
112	Driver for shaft seal				1	
111.a	Stop ring				1	pcs

Pos	Description	Annotation	Données de classification	Référence	Quantité	Unité
151	Fan cover				1	pcs
151.a	Installation indicator				1	pcs
152	Pan head thread forming screw				4	pcs
156	Fan				1	pcs
191	Foot				1	pcs

Disclaimer: The information about the Grundfos pump in this document may be outdated.

Data may be subject to alterations without further notice.

Please contact us to verify the data above is still accurate/up-to-date.

All information is copyright Grundfos.



info@lenntech.com

<https://www.lenntech.com>

tel. +31 152 610 900

fax. +31 152 616 289