

MLD.24.3.2 3x400V

Grundfos pump 97901110



Thank you for your interest in our products. Please contact us for more information, or visit our website

<https://www.lenntech.com/grundfos/MULDOUB/97901110/MLD-24-3-2.html>

info@lenntech.com

tel. +31 152 610 900


fax. +31 152 616 289

Position	Qty.	Description
	1	MLD.24.3.2  Note! Product picture may differ from actual product Product No.: On request Supplied as complete unit ready for installation, the Multilift consist of a fully integrated collecting tank with two pumps and submersible motors, non-return valve with integrated Y-branch pipe, discharge adapter with flexible connection piece DN100 mounted on the collecting tank and a pre-wired Controller incl. a level sensor. The fully integrated collecting tank has all necessary ports for the connection of inlet pipe, discharge pipe, vent pipe and a manually operated diaphragm pump (accessory). The collecting tank contains 2 inlet sockets. Main inlet DN150 on the stepped tank and DN50 on the top. Multilift corrosion free polyethylen collecting tanks are gas- and odour-proof as well as watertight , reduction of residual water and less sedimentation by chamfered bottom design. Pumps with Vortex impeller and a maintenance free submersible motors, oil chamber with physiological harmless oil filling between two shaft seals. Direction of rotation can be observed from outside over the shaft below the eye bolt. An LC221 controller with microprocessor is equipped with display for full monitoring possibilities. The pump and sensor are connected to the controller with 4m or 10m cable and tube length. The power supply cable is 1,5m with plug (incl. phase inverter for 3 phase motor) Contactless, piezo resistive pressure sensor pluggable inside the cabinet, monitored by controller, accurate to the millimetre shown on display. Blockage free pressure tube inside the tank without movable parts inside wastewater. The controller offer thermal motor protection and monitoring of pump operation. The thermal motor protection consists of thermal switches in the winding. Controller functions: • on/off, regular and failure changeover of two wastewater pumps based on a continuous signal from a piezo-resistive sensor • motor protection via motor-protective circuit breaker and/or current measurement as well as connection of thermal switches. • dry running motor protection via run-time limitation with a following emergency operation • 24h automatic test runs during long periods of inactivity • setting of delay times: - stopping delay (time from the stop level is reached till the pumped is stopped) - starting delay (time from the start level is reached till the pumped is started) - alarm delay (time from a fault appears till an alarm is indicated) to prevents short-time high-level alarm in case of temporary high inflow to the tank. • automatic current measurement for alarm indications • operating indication of: - operating mode (auto, manual) - operating hours - impulses (number of starts)




Position	Qty.	Description																																												
		- highest measured motor current • alarm indication of: - pump status (running, fault) - phase-sequence fault and missing phase - thermal-switch failure - high-water alarm - time for service/maintenance (selectable). • selection of automatic alarm resetting • fault log of up to 20 alarms • selection between different start levels • selection of connected sensor type • calibration of sensor (preset) • selection of maintenance interval (0, 3, 6 or 12 months). As standard, the LC 221 has 6 potential-free outputs for: – pump running – pump failure – high water-level alarm – common fault. 6 digital inputs for the following functions: – connecting a pressure sensor board (pre-assembled) – connecting an analogue sensor (4-20mA or 0-5V) – connecting up to four level switches or pressure switches instead of analogue sensor – connecting a separate level switch to be used for flood detection outside the Multilift. Lifting stations are often installed in a sump inside the basement - the lowest point in the building. In case of e.g. groundwater inflow or water pipe burst, an alarm will be indicated by the controller. – connecting an external alarm reset – connecting the thermal switch of the motor. The Multilift range is designed due to the standard EN12050-1, approved and monitored by external institute LGA. Further approvals are VDE, GHOST, CB, EMV Technical: <table><tr><td>Type of impeller:</td><td>VORTEX</td></tr><tr><td>Maximum particle size:</td><td>50 mm</td></tr><tr><td>Valve type:</td><td>FLAP VALVE</td></tr></table> Materials: <table><tr><td>Gasket:</td><td>NBR</td></tr></table> Liquid: <table><tr><td>Maximum liquid temperature:</td><td>40 °C</td></tr><tr><td>Density:</td><td>998.2 kg/m³</td></tr></table> Electrical data: <table><tr><td>Power input - P1:</td><td>2 x 3.1 kW</td></tr><tr><td>Rated power - P2:</td><td>2 x 2.7 kW</td></tr><tr><td>Mains frequency:</td><td>50 Hz</td></tr><tr><td>Rated voltage:</td><td>3 x 400 V</td></tr><tr><td>Voltage tolerance:</td><td>+10/-14 %</td></tr><tr><td>Max starts per. hour:</td><td>60</td></tr><tr><td>Rated current:</td><td>2 X 5,5 A</td></tr><tr><td>Cos phi - power factor:</td><td>0.81</td></tr><tr><td>Rated speed:</td><td>2920 rpm</td></tr><tr><td>Motor efficiency at full load:</td><td>86.2 %</td></tr><tr><td>Number of poles:</td><td>2</td></tr><tr><td>Start. method:</td><td>direct-on-line</td></tr><tr><td>Enclosure class (IEC 34-5):</td><td>IP68</td></tr><tr><td>Insulation class (IEC 85):</td><td>F</td></tr><tr><td>Type of cable plug:</td><td>CEE 3P+N+E</td></tr><tr><td>Mains cable:</td><td>1.5 m</td></tr></table>	Type of impeller:	VORTEX	Maximum particle size:	50 mm	Valve type:	FLAP VALVE	Gasket:	NBR	Maximum liquid temperature:	40 °C	Density:	998.2 kg/m³	Power input - P1:	2 x 3.1 kW	Rated power - P2:	2 x 2.7 kW	Mains frequency:	50 Hz	Rated voltage:	3 x 400 V	Voltage tolerance:	+10/-14 %	Max starts per. hour:	60	Rated current:	2 X 5,5 A	Cos phi - power factor:	0.81	Rated speed:	2920 rpm	Motor efficiency at full load:	86.2 %	Number of poles:	2	Start. method:	direct-on-line	Enclosure class (IEC 34-5):	IP68	Insulation class (IEC 85):	F	Type of cable plug:	CEE 3P+N+E	Mains cable:	1.5 m
Type of impeller:	VORTEX																																													
Maximum particle size:	50 mm																																													
Valve type:	FLAP VALVE																																													
Gasket:	NBR																																													
Maximum liquid temperature:	40 °C																																													
Density:	998.2 kg/m³																																													
Power input - P1:	2 x 3.1 kW																																													
Rated power - P2:	2 x 2.7 kW																																													
Mains frequency:	50 Hz																																													
Rated voltage:	3 x 400 V																																													
Voltage tolerance:	+10/-14 %																																													
Max starts per. hour:	60																																													
Rated current:	2 X 5,5 A																																													
Cos phi - power factor:	0.81																																													
Rated speed:	2920 rpm																																													
Motor efficiency at full load:	86.2 %																																													
Number of poles:	2																																													
Start. method:	direct-on-line																																													
Enclosure class (IEC 34-5):	IP68																																													
Insulation class (IEC 85):	F																																													
Type of cable plug:	CEE 3P+N+E																																													
Mains cable:	1.5 m																																													

Position	Qty.	Description
		Controls: Type of control box: LC221.2 Tank: Total volume of tank(s): 270 l Total effective volume of collecting tank at 180 mm inlet: 190 l


On request MLD.24.3.2 50 Hz

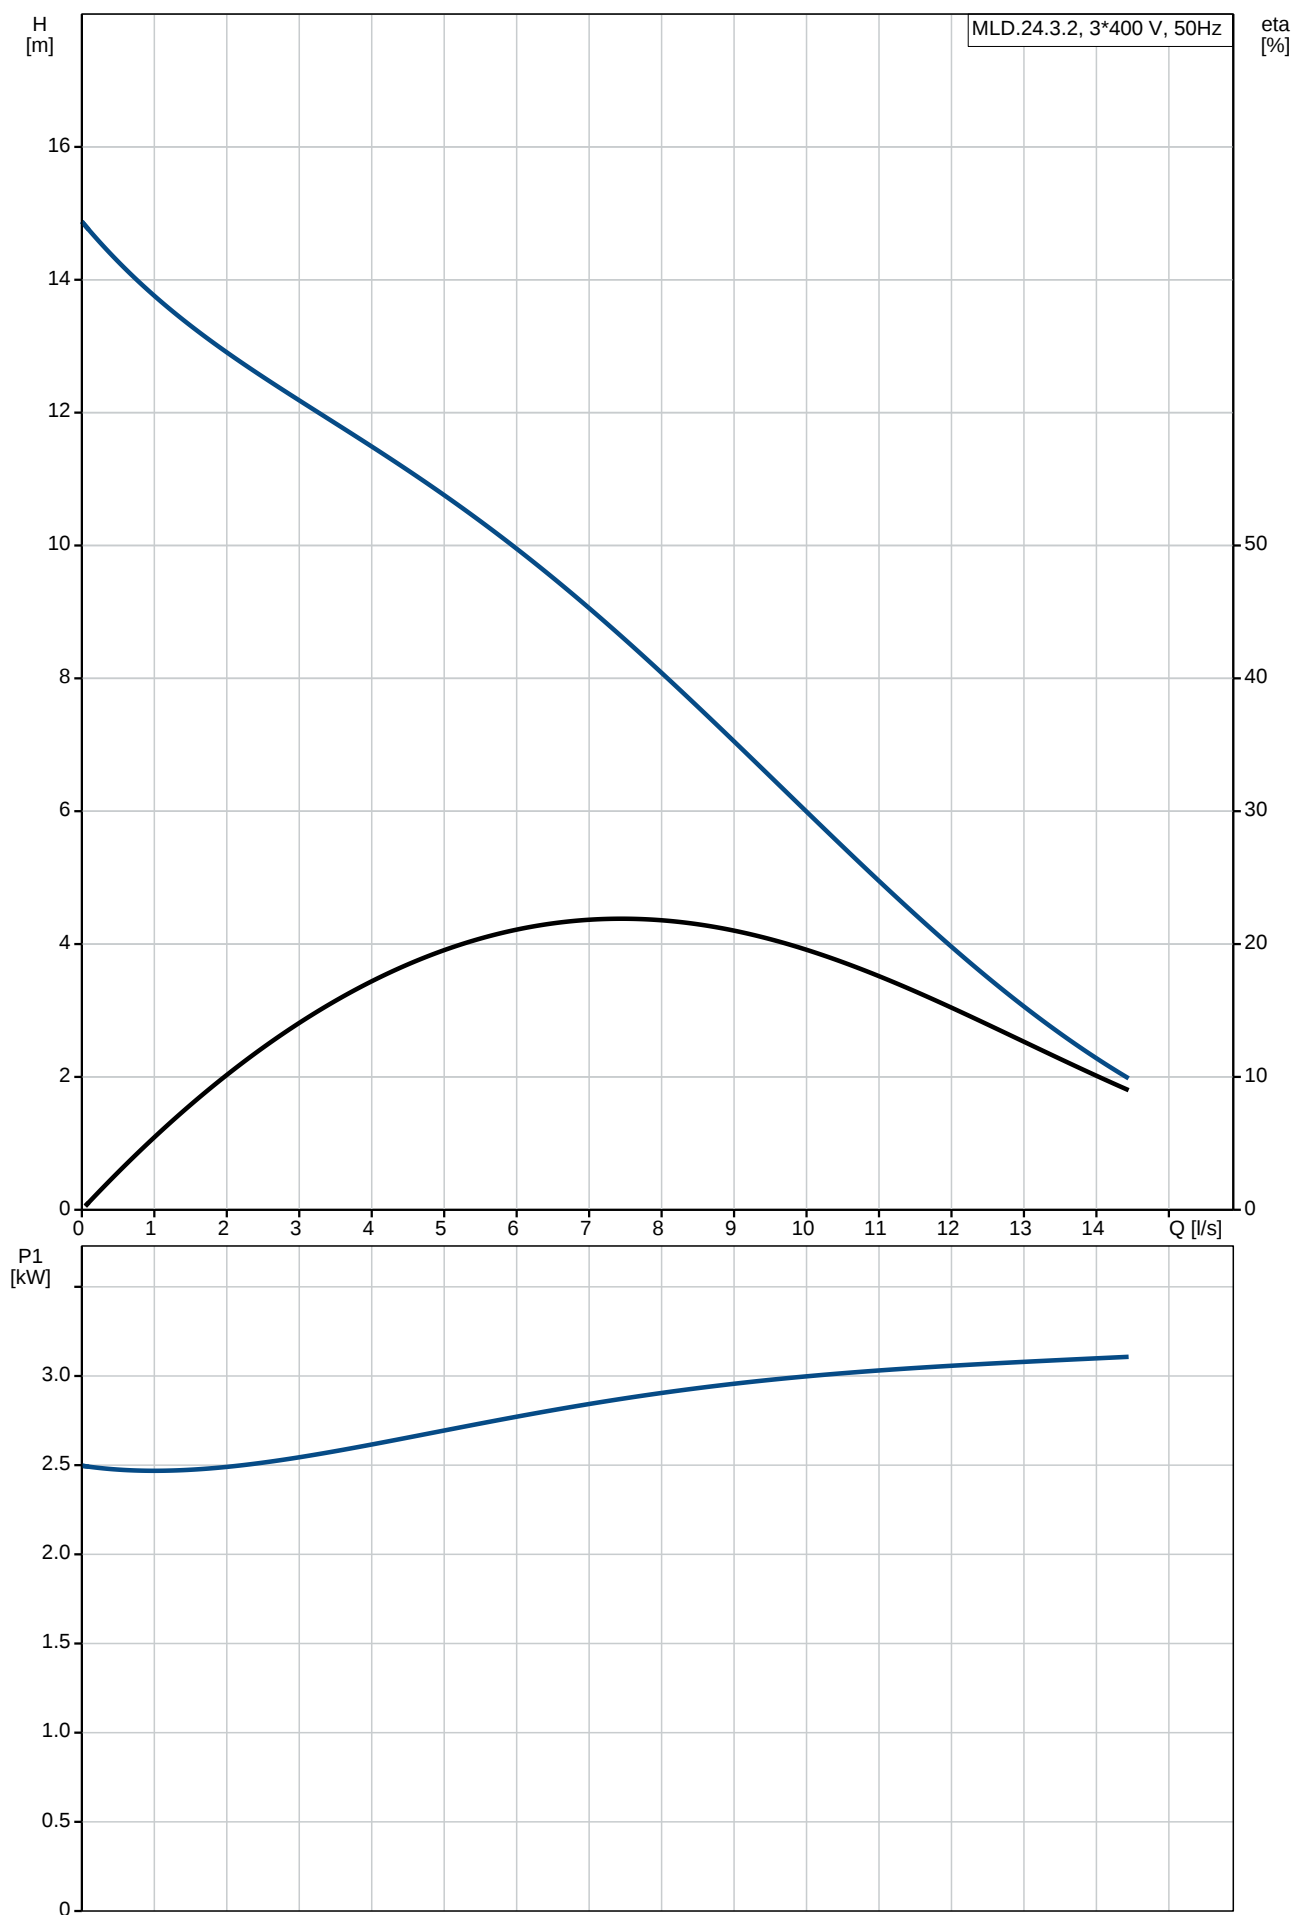

Description	Value
General information:	
Product name:	MLD.24.3.2
Product No:	On request
EAN number:	On request
Technical:	
Max flow:	14.4 l/s
Head max:	14.9 m
Type of impeller:	VORTEX
Maximum particle size:	50 mm
Valve type:	FLAP VALVE
Materials:	
Gasket:	NBR
Liquid:	
Maximum liquid temperature:	40 °C
Density:	998.2 kg/m ³
Electrical data:	
Power input - P1:	2 x 3.1 kW
Rated power - P2:	2 x 2.7 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 400 V
Voltage tolerance:	+10/-14 %
Max starts per. hour:	60
Rated current:	2 X 5,5 A
Cos phi - power factor:	0.81
Rated speed:	2920 rpm
Motor efficiency at full load:	86.2 %
Number of poles:	2
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Motor protec:	BIMETAL THERMAL SWITCH
Motor cable:	4 m
Cable type:	H07 RN-F
Type of cable plug:	CEE 3P+N+E
Mains cable:	1.5 m
	H05 VV-F
Controls:	
Type of control box:	LC221.2
Operation mode:	S3-50%,1MIN
Tank:	
Total volume of tank(s):	270 l
Total effective volume of collecting tank at 180 mm inlet:	190 l

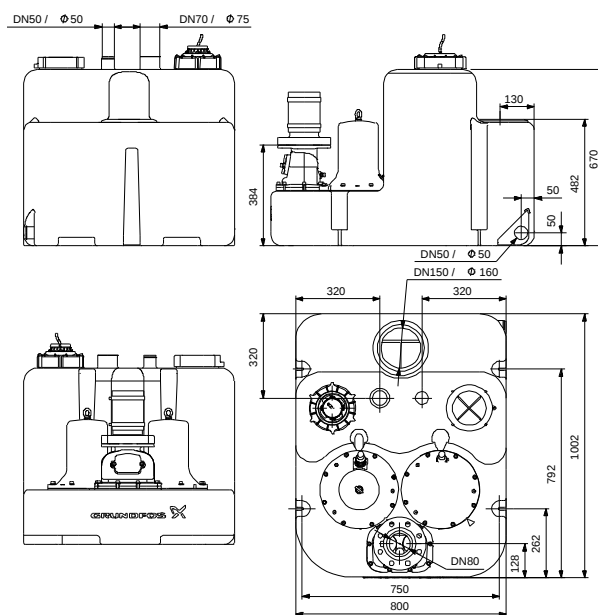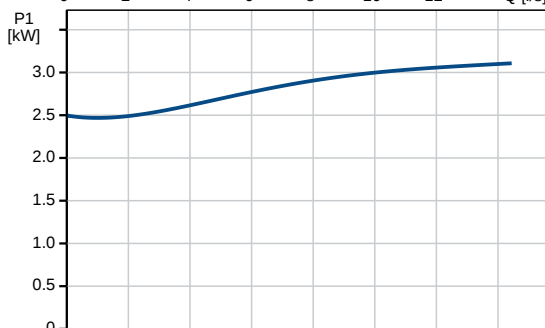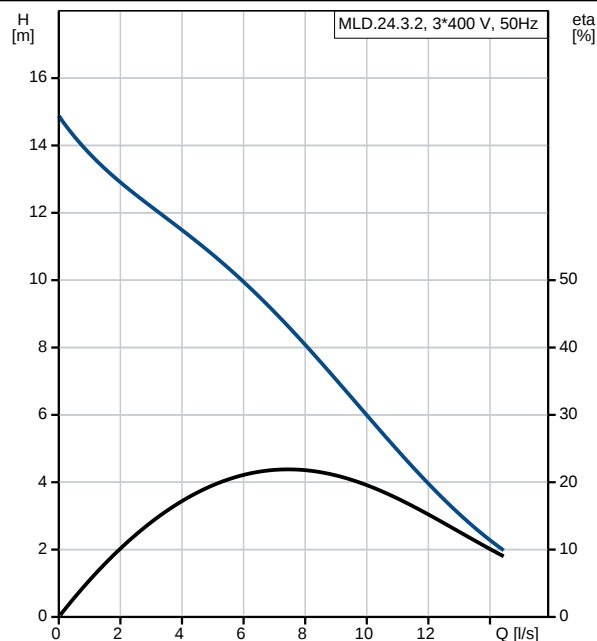

On request MLD.24.3.2 50 Hz

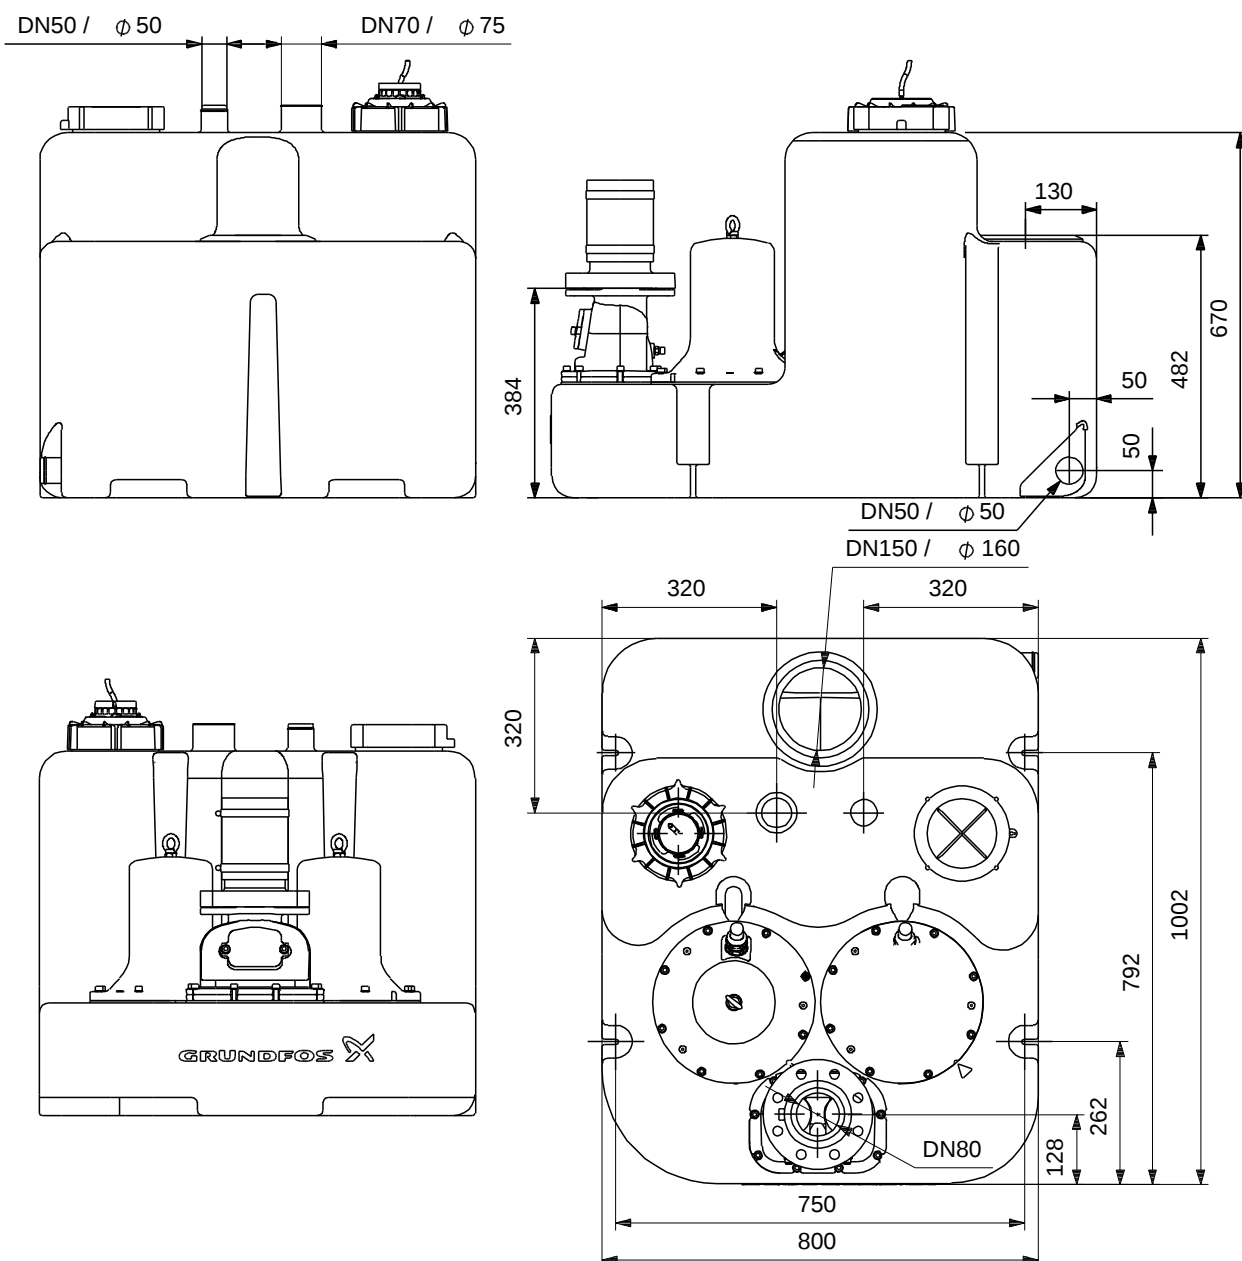

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Exploded view



Sectional drawing (TM058200 for TPE2,TPE3)



TM058200

Exploded view (TM057026 for MGE model H/I)



Disclaimer: The information about the Grundfos pump in this document may be outdated.

Data may be subject to alterations without further notice.

Please contact us to verify the data above is still accurate/up-to-date.

All information is copyright Grundfos.



info@lenntech.com

<https://www.lenntech.com>

tel. +31 152 610 900

fax. +31 152 616 289