

SEV.80.80.240.2.52H.C.N.51D

Grundfos pump 98179845



Thank you for your interest in our products. Please contact us for more information, or visit our website

<https://www.lenntech.com/grundfos/SESLFAM/98179845/SEV-80-80-240-2-52H-C-N-51D.html>

info@lenntech.com

tel. +31 152 610 900

fax. +31 152 616 289

Position	Qty.	Description
	1	SEV.80.80.240.2.52H.C.N.51D  Note! Product picture may differ from actual product Product No.: On request Non-self-priming, single-stage, centrifugal pump designed for handling wastewater, process water and unscreened raw sewage. The pump is designed for intermittent and continuous operation. The cooling jacket ensures that the pump can operate submerged or dry installed without motor cooling. The efficient SuperVortex impeller provides passage of long fibres and solids up to 80 mm and suitable for wastewater with a dry matter content of up to 5 %. For installation on auto coupling, the Grundfos SmartSeal gasket system provides a leak-proof connection. The pump comes with a high efficient Grundfos blueflux® motor made with IE3 components. Further product details Typical applications are transfer of liquid, such as: - large quantities of drainage and surface water - domestic wastewater with discharge from toilets - wastewater from commercial buildings without discharge from toilets - sludge-containing industrial wastewater. The pump is ideal for the pumping of the above liquids from for instance: - municipal network pumping stations - raw water intake systems - wastewater treatment plants - public buildings - blocks of flats - factories/industry. The pump is suitable for both temporary and permanent installation. The lifting brackets fitted on the pumps enables easy transportation to and installation on the installation site. Pump The pump is fitted with an easy-to-clean stainless steel motor sleeve (EN 1.4301) that is extremely robust and impact-resistant. The pump housing and motor top are made in cast iron (EN-GJL-250) and the impeller is made of ductile cast-iron (EN-GJS-500). All surfaces of the cast iron parts are protected with cataphoresis coating. The surface of the cast iron pump parts is afterwards painted with environmental friendly powder coating (type NCS 9000N (black), gloss code 30, thickness 100 µm) which ensures high impact and corrosion protection. The final pump is assembled from already painted parts which ensures that no rust or scale can be formed in grooves between parts, etc. The SuperVortex impeller is a symmetrical multivane winglet impeller. The design ensures a flow entirely outside the impeller providing limited contact between the impeller and the pumped liquid. This ensures that long fibres, rags and more passes freely through the pump without getting caught and without causing clogging or jamming.  This pump is equipped with the unique SmartTrim impeller clearance adjustment system that enables easy restoring of factory-set impeller clearance. By tightening the adjustment screws on the exterior of the pump housing, peak pumping efficiency can be maintained. This can be done on site, quickly and easily, without dismantling the pump and without using special tools.

The shaft seals of the pump consist of two mechanical seals that ensure a reliable sealing between the pumped liquid and motor. The shaft seal is a cartridge seal that enables easy service.

The combination of the primary and secondary seals in a cartridge shaft seal system results in a shorter assembly length compared to conventional shaft seals. Furthermore, this design minimises the risk of incorrect fitting and can be installed on site without the need for special tools.

- Primary seal: Silicon carbide/silicon carbide (SiC/SiC)
- Secondary seal: Carbon/ceramic

The shaft seal is bidirectional, meaning it operates correctly in case of backflow through the pump.

The pump discharge flange is mounted with the Grundfos SmartSeal auto-coupling gasket, that provides a completely leak-proof connection between the pump and the base unit of the auto-coupling system. This optimises the efficiency of the entire pumping system and keeps operating costs at a minimum.

Motor

The product carries the Grundfos blueflux® label. It represents the best from Grundfos within energy-efficient motors and frequency converters. Grundfos blueflux® solutions ensures that the motor is built out of high efficiency components.



The motor is a watertight, totally encapsulated motor supplied with a 10 m power cable. A watertight stainless-steel cable entry with soft shape and sealing rings to prevent damage of the cable or leaks.

The motor construction is compact with short shaft which reduces vibrations resulting in increased efficiency and lifetime of the shaft seal and ball bearings.

Thermal switches are incorporated in the motor windings to protect the motor against overheating.

The pump has a closed motor cooling system and can be installed either dry or submerged. The motor is factory-filled with Grundfos motor liquid SML-3 which is a propylene glycol mixture. The motor liquid ensures both cooling of the motor and lubrication of the shaft seal. The shaft seal has a built-in impeller ensuring circulation of the cooling liquid.

The pump is designed for speed-controlled operation to keep the energy consumption at a minimum. To avoid the risk of sedimentation in the pipes, we recommend that you operate the speed-controlled pump within a speed range of 30 % to 100 % and at a flow rate above 1 m/s.

Controls:

Moisture sensor:	with moisture sensors
Water-in-air sensor:	N

Liquid:

Liquid temperature range:	0 .. 40 °C
Density:	998.2 kg/m³

Technical:

Type of impeller:	SUPERVORTEX
Maximum particle size:	80 mm
Primary shaft seal:	SIC-SIC
Secondary shaft seal:	SIC-CARBON
Curve tolerance:	ISO9906:2012 3B

Materials:


Pump housing:	Cast iron EN 1561 EN-GJL-250
Impeller:	Cast iron EN 1563 EN-GJS-500-7
Motor:	Cast iron EN 1561 EN-GJL-250

Installation:



Maximum ambient temperature:	40 °C
Flange standard:	DIN
Pump inlet:	DN 100
Pump outlet:	DN 80
Pressure rating:	PN 10
Maximum installation depth:	20 m

Position	Qty.	Description
		Auto-coupling: 96102240 Inst vertical: 96308237 Base stand: 96102313 Frame range: 52 Electrical data: Power input - P1: 27 kW Rated power - P2: 24 kW Mains frequency: 50 Hz Rated voltage: 3 x 380-415/660-690 V Voltage tolerance: +10/-10 % Max starts per. hour: 20 Rated current: 51-47/30-28 A Maximum current consumption: 49 A Starting current: 582/320 A Rated current at no load: 24.6 A Rated speed: 2955 rpm Motor efficiency at full load: 88 % Motor efficiency at 3/4 load: 86 % Motor efficiency at 1/2 load: 84 % Number of poles: 2 Start. method: star/delta Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): H Explosion proof: no Ex-protection standard: N Length of cable: 10 m Cable type: S1BN8-F Winding resistance: 0.260 Ohm Cos phi 1/1: 0.82 Cos phi 1/2: 0.69 Cos phi 3/4: 0.77 Others: Net weight: 324 kg

On request SEV.80.80.240.2.52H.C.N.51D 50 Hz

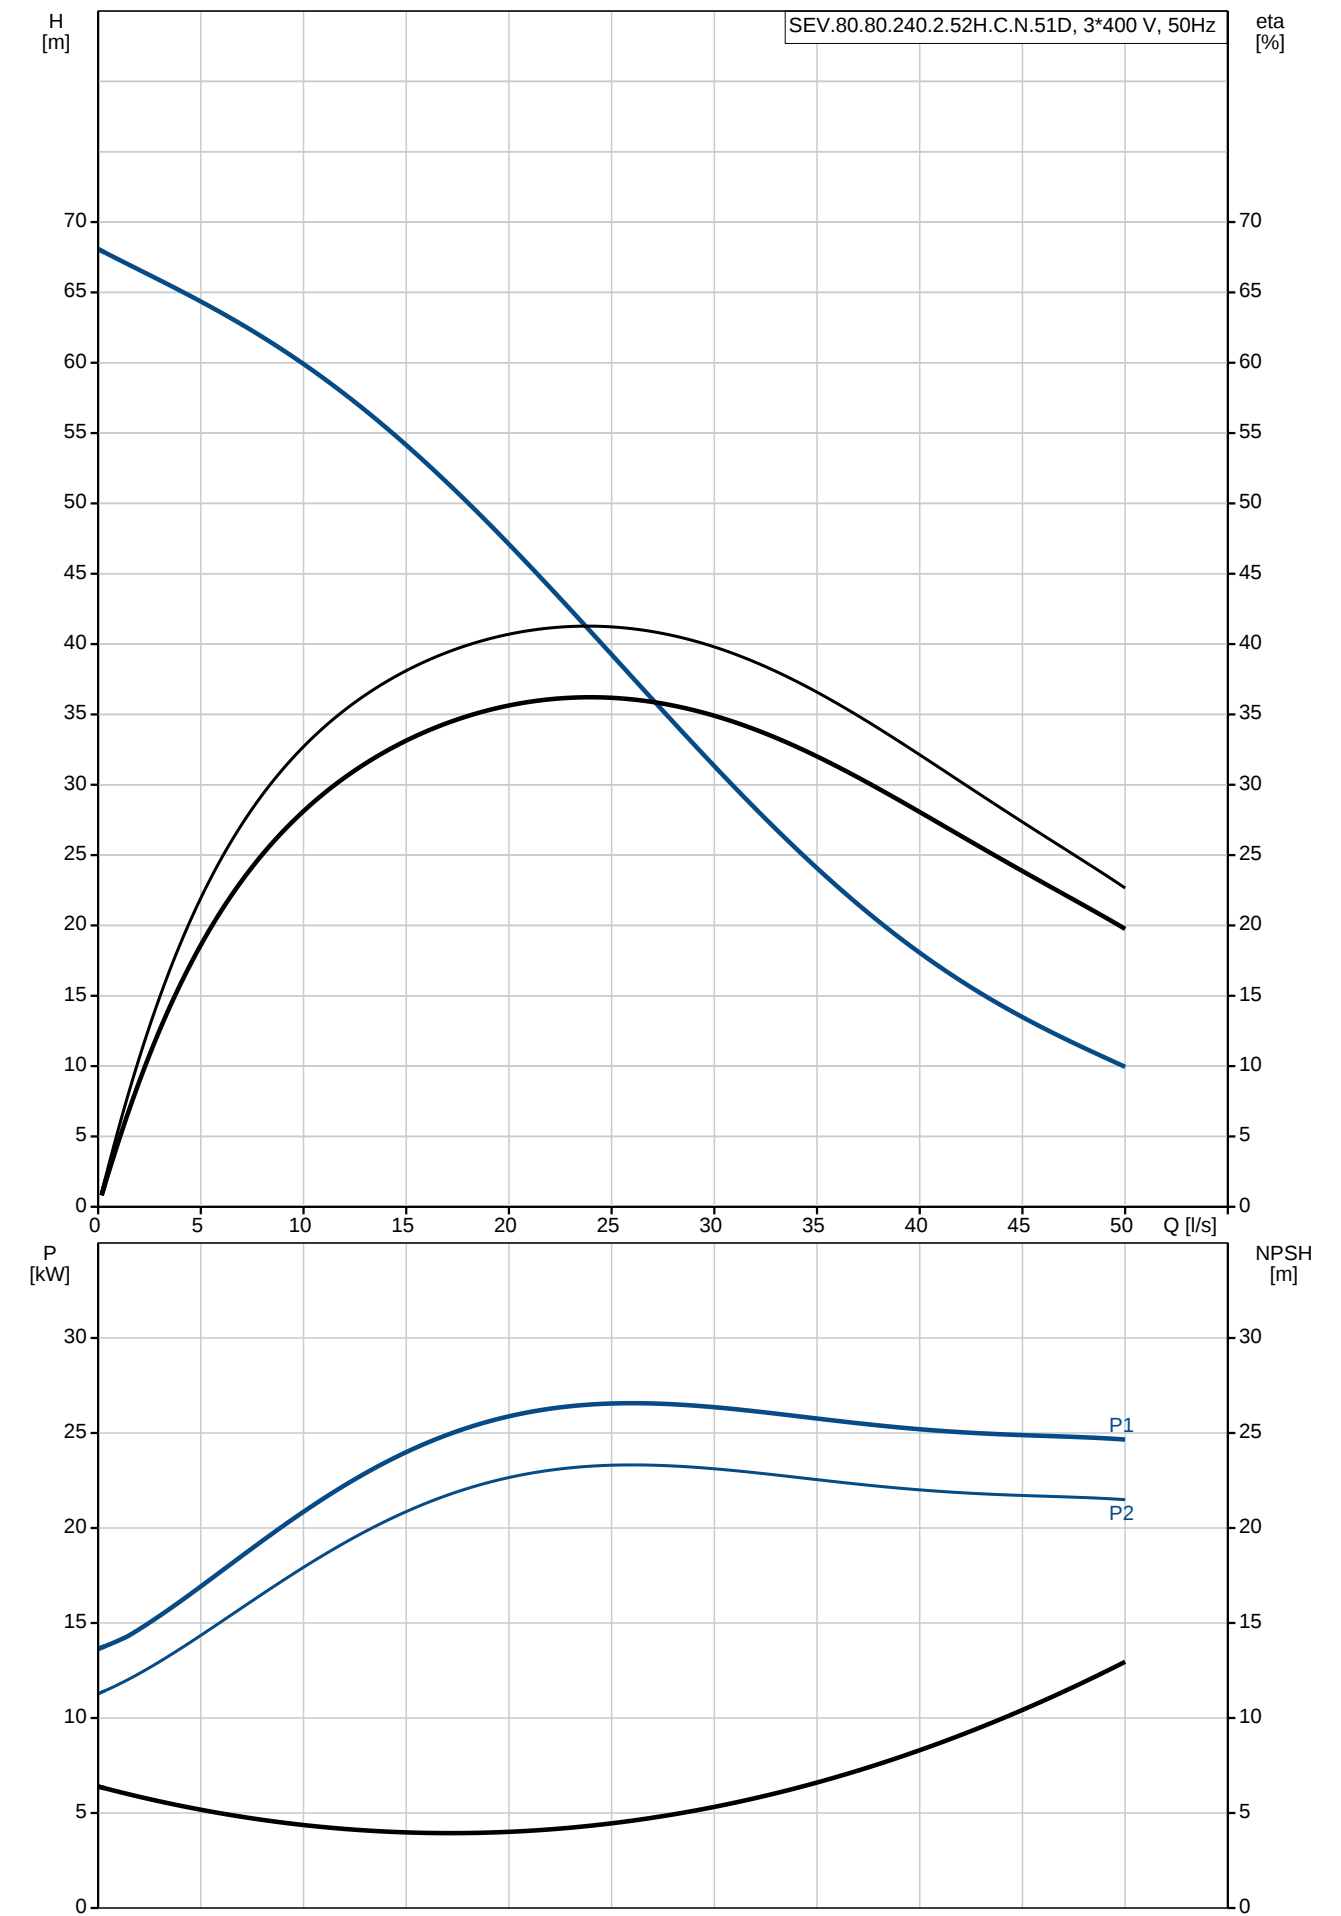

Description	Value
General information:	
Product name:	SEV.80.80.240.2.52H.C.N.51D
Product No:	On request
EAN number:	On request
Technical:	
Max flow:	50 l/s
Head max:	63 m
Type of impeller:	SUPERVORTEX
Maximum particle size:	80 mm
Primary shaft seal:	SIC-SIC
Secondary shaft seal:	SIC-CARBON
Curve tolerance:	ISO9906:2012 3B
Cooling jacket:	with cooling jacket
Materials:	
Pump housing:	Cast iron
	EN 1561 EN-GJL-250
Impeller:	Cast iron
	EN 1563 EN-GJS-500-7
Motor:	Cast iron
	EN 1561 EN-GJL-250
Installation:	
Maximum ambient temperature:	40 °C
Flange standard:	DIN
Pump inlet:	DN 100
Pump outlet:	DN 80
Pressure rating:	PN 10
Maximum installation depth:	20 m
Installation:	C
Inst dry/wet:	D/S
Installation:	vertical
Auto-coupling:	96102240
Inst vertical:	96308237
Base stand:	96102313
Frame range:	52
Liquid:	
Liquid temperature range:	0 .. 40 °C
Density:	998.2 kg/m ³
Electrical data:	
Power input - P1:	27 kW
Rated power - P2:	24 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-415/660-690 V
Voltage tolerance:	+10/-10 %
Max starts per. hour:	20
Rated current:	51-47/30-28 A
Maximum current consumption:	49 A
Starting current:	582/320 A
Rated current at no load:	24.6 A
Rated speed:	2955 rpm
Motor efficiency at full load:	88 %
Motor efficiency at 3/4 load:	86 %
Motor efficiency at 1/2 load:	84 %
Number of poles:	2
Start. method:	star/delta
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	H
Explosion proof:	no
Ex-protection standard:	N
Motor protec:	KLIXON
Length of cable:	10 m
Cable type:	S1BN8-F
Cable size:	7X6 + 5X1,5
Cable resistance:	3.30 mOhm/m
Winding resistance:	0.260 Ohm

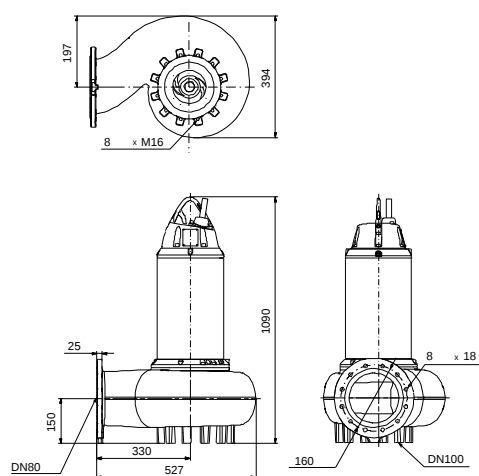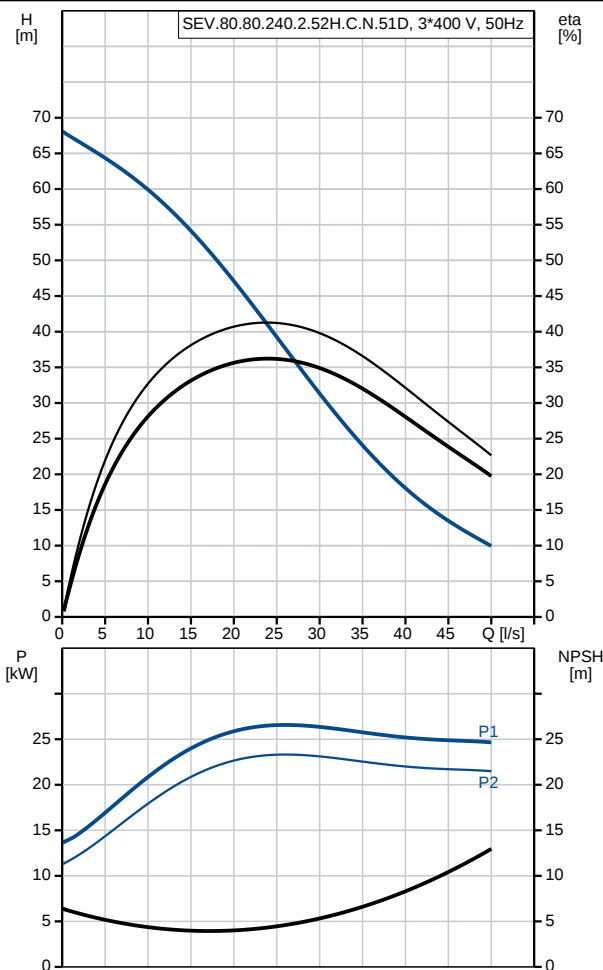


Wiring diagram. 12-wire cable




Description	Value
Cos phi 1/1:	0.82
Cos phi 1/2:	0.69
Cos phi 3/4:	0.77
Controls:	
Moisture sensor:	with moisture sensors
Water-in-air sensor:	N
Others:	
Net weight:	324 kg

On request SEV.80.80.240.2.52H.C.N.51D 50 Hz

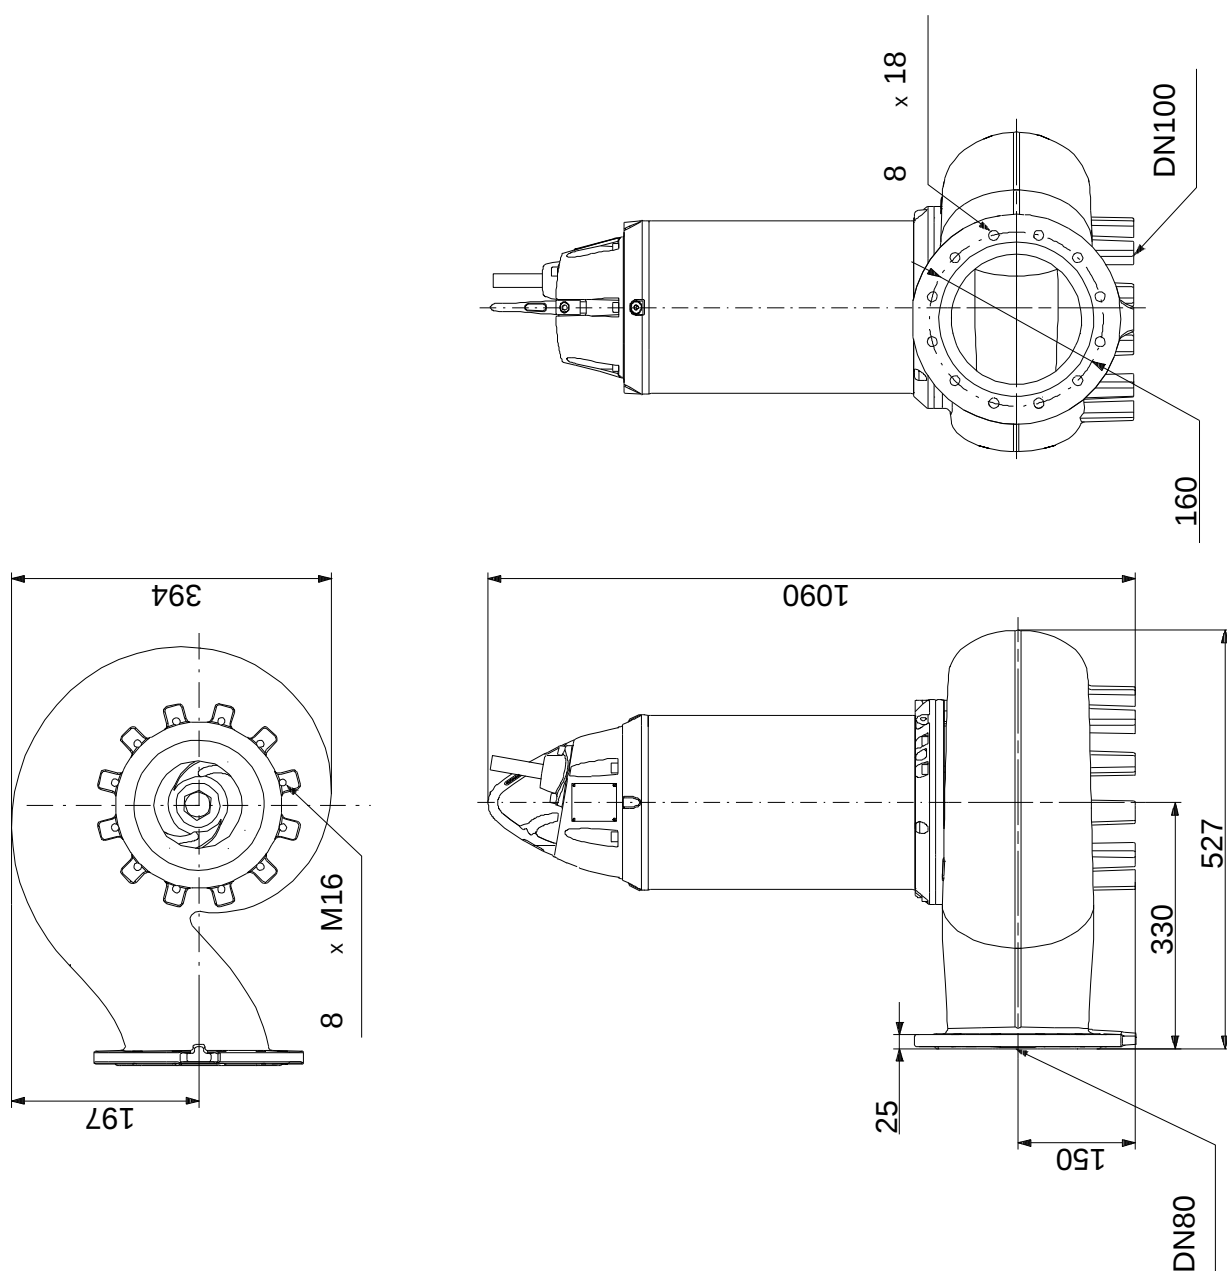


Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

On request SEV.80.80.240.2.52H.C.N.51D 50 Hz

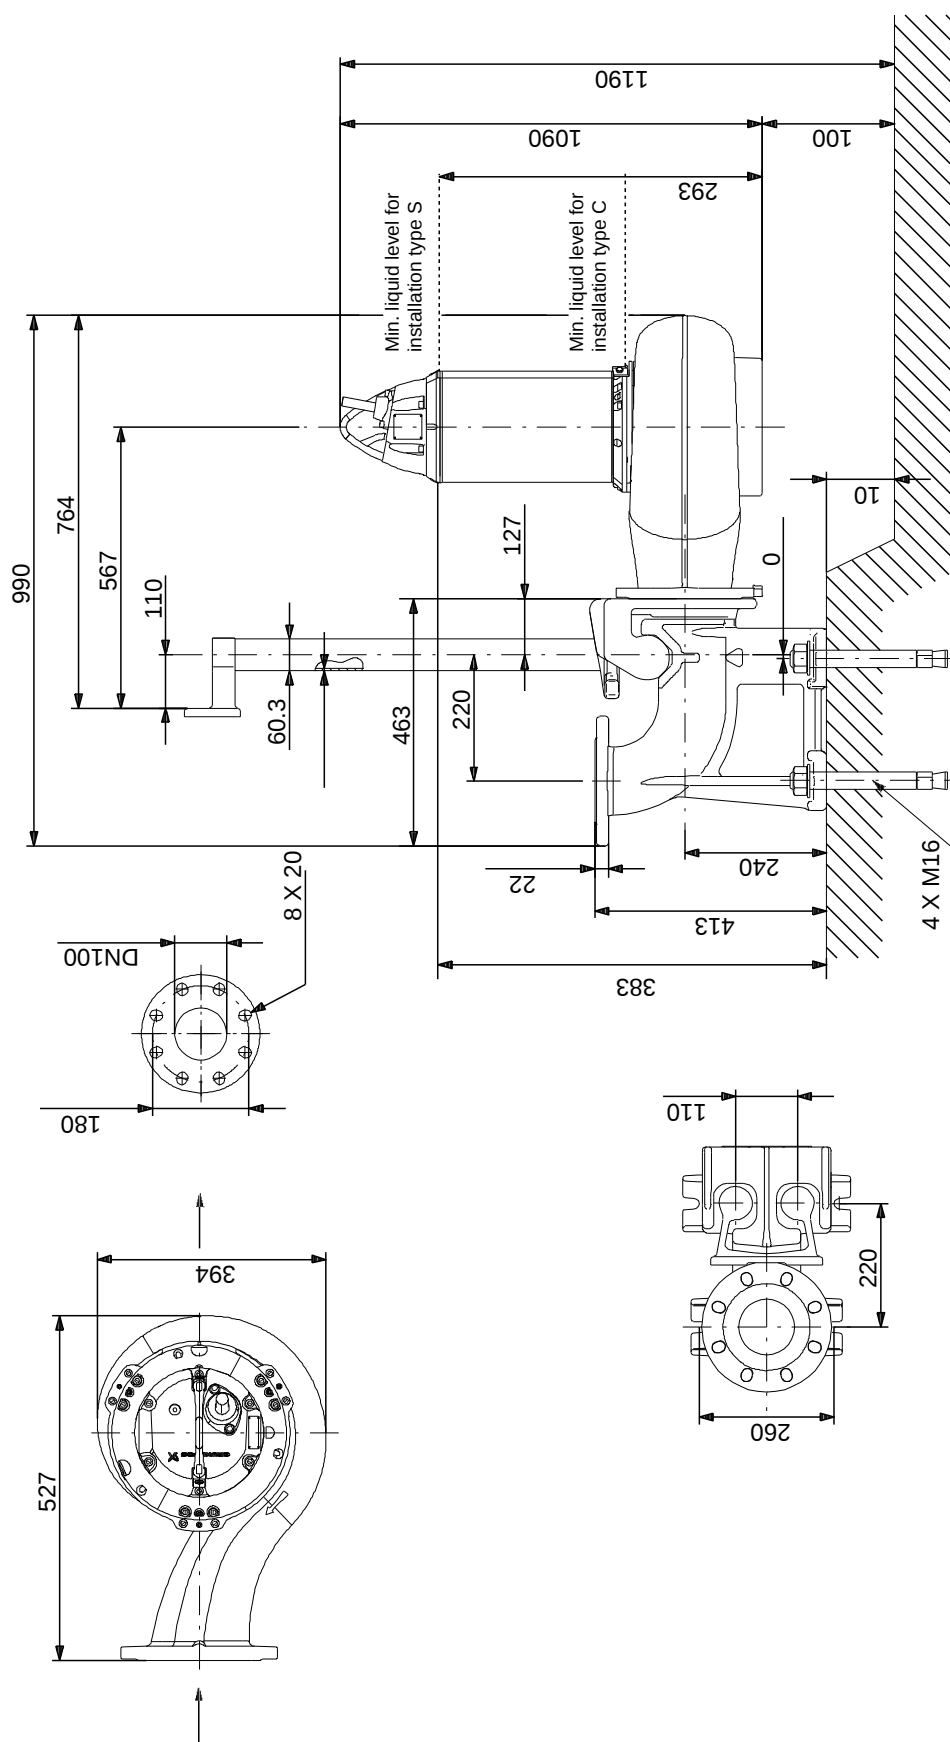


Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

On request SEV.80.80.240.2.52H.C.N.51D 50 Hz

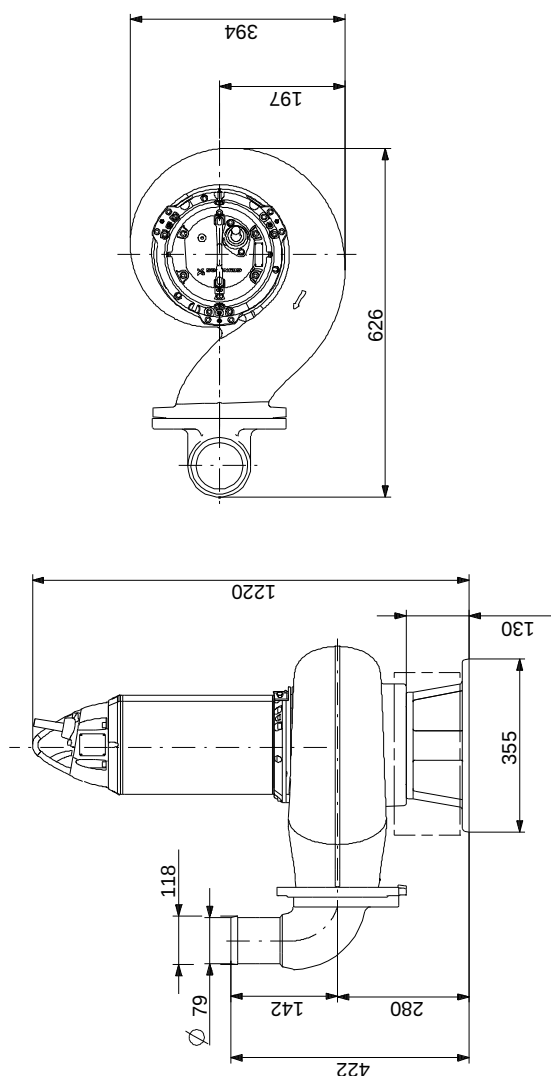

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

On request SEV.80.80.240.2.52H.C.N.51D 50 Hz

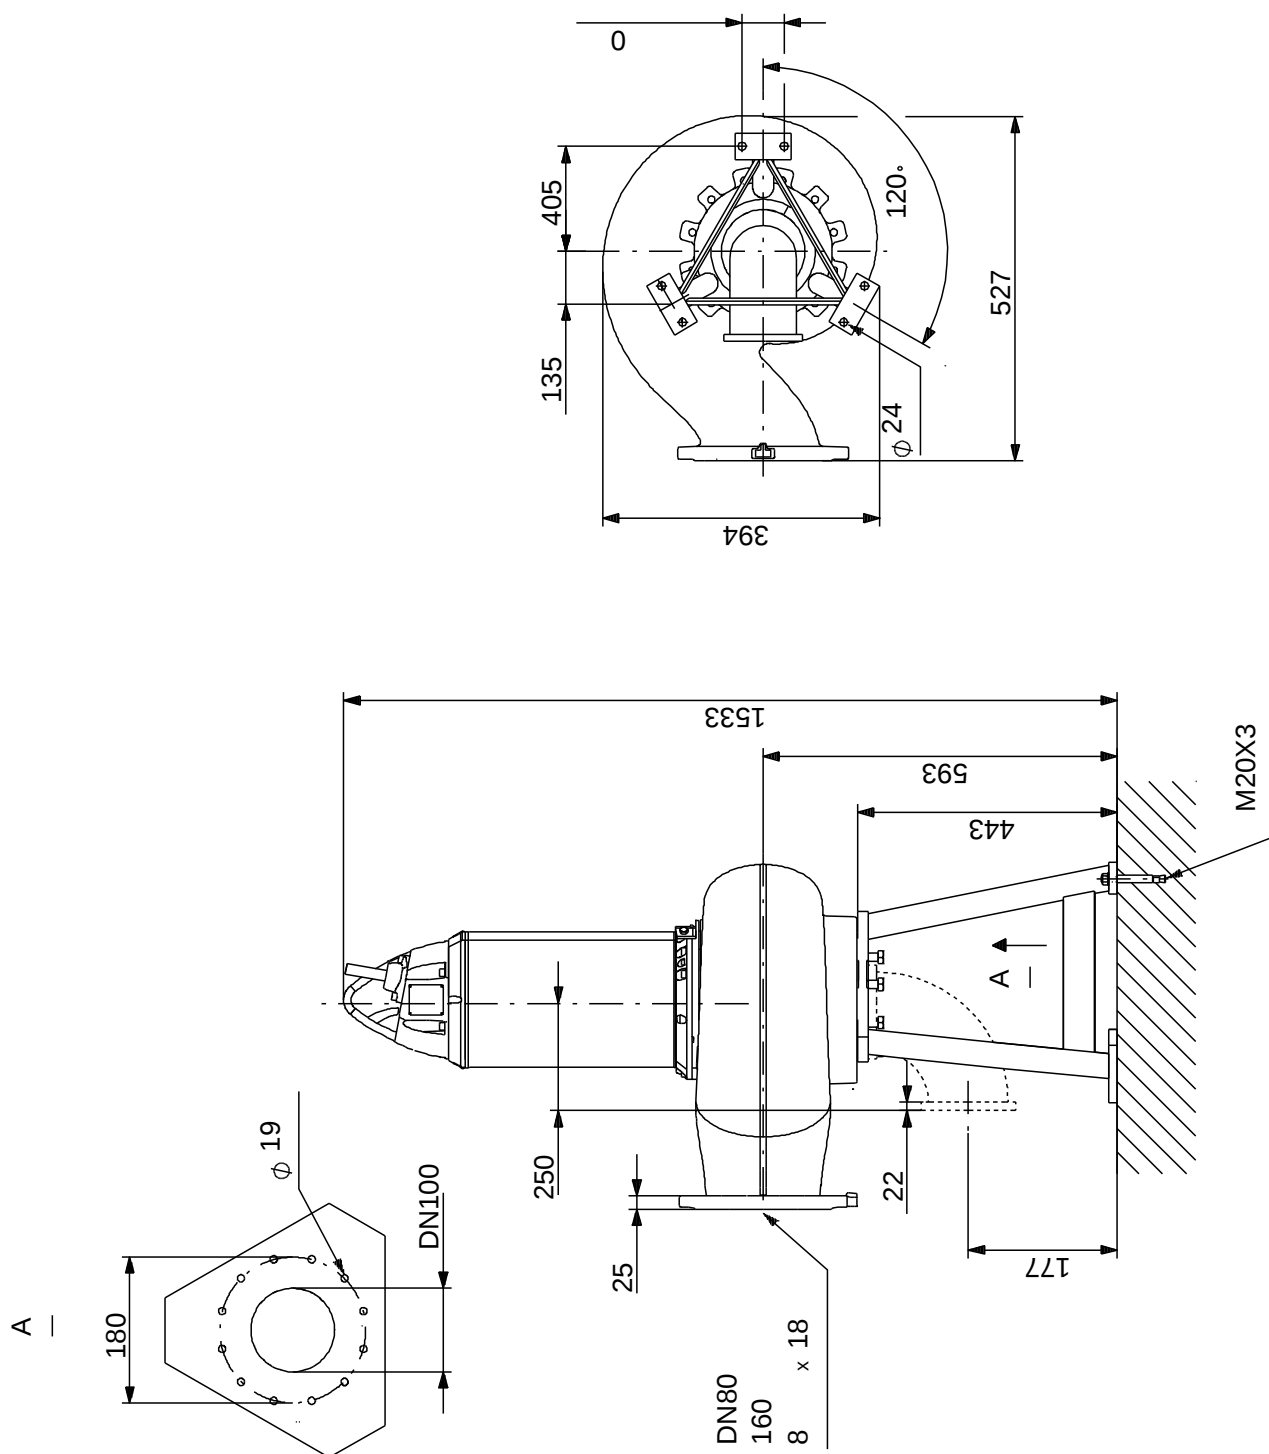

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Exploded view




Sectional drawing (TM058200 for TPE2,TPE3)



TM058200

Exploded view (TM057026 for MGE model H/I)

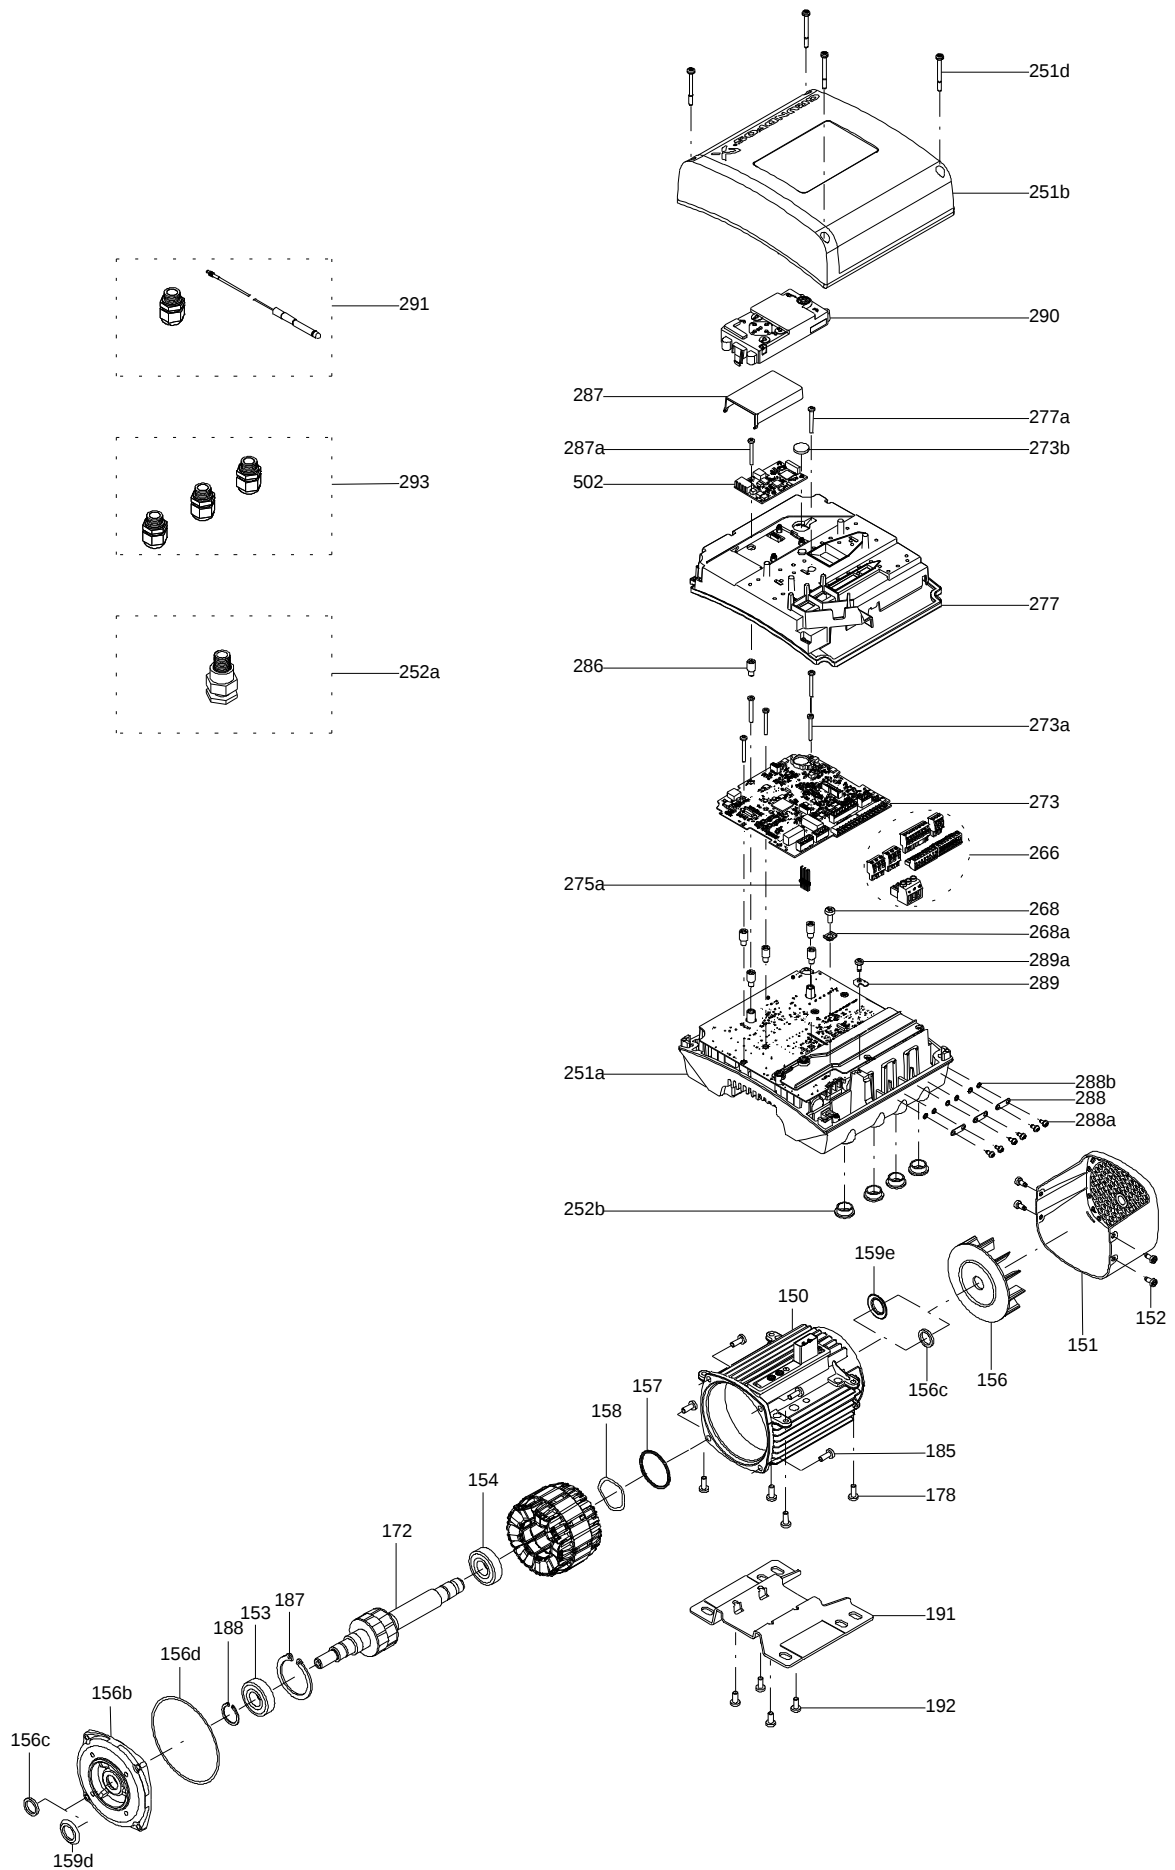

Parts list SEV.80.80.240.2.52H.C.N.51D, Product No. On request
Valid from 12.6.2012 (1224)

Pos	Description	Annotation	Données de classification	Référence	Quantité	Unité
-	Motor				1	pcs
	Washer				6	
	Hose				1	
	Grease				30	
	Cable shoe w/piggy back				1	
	Absorbent				1	
	Cable tie				1	
	Hex socket head cap screw				3	
	Formed wire spring				1	
6	Washer				3	
25	Plug				1	
55a	Retaining ring				1	
58	Seal housing				1	
58a	Seal housing				1	
59	Cover				1	
61	Bearing bracket, upper				1	
150b	Cooling jacket				1	
150c	Cooling jacket				1	
155	Bearing bracket, lower				1	
164a	Motor cover				1	
173e	Hex head screw				1	
173f	Disc spring				1	
178	Hex socket head cap screw				6	
182	Hex socket head cap screw		Designation: M 10 Length (mm): 30		3	
182b	Hex head bolt				3	
182c	Washer				3	
183	Hex socket head cap screw		Designation: M 10 Length (mm): 30		3	
185	Hex socket head cap screw				3	
190	Handle				1	
190b	Hex socket head cap screw				2	
193	Plug				2	
193	Plug				2	
520	Moisture sensor				1	
520a	Slot cheese head screw		Length (mm): 10 Thread: M3		1	
520c	Hex socket head cap screw				1	
521	Switch				1	
521a	Disc spring				1	
521b	Hex socket head cap screw				1	
522	Holder				1	
522c	Lock washer				1	
754	Cooling jacket				1	
-	O-ring				1	pcs
	O-ring				1	
37a	O-ring				2	
72a	O-ring				1	
106	O-ring				1	
107	O-ring				1	
157	O-ring		Diameter: 209 MM Material type: NBR Thickness: 5,7 MM		1	
157b	O-ring				1	
157c	O-ring				2	
157d	O-ring				1	
182d	O-ring				3	
-	Cable arrangement				1	pcs
	Cable cpl.				1	

Pos	Description	Annotation	Données de classification	Référence	Quantité	Unité
	Cable socket				5	
	Connector				7	
168	Cable entry				1	
168a	Cable entry				1	
168b	Cable connector				1	
176a	Terminal block				1	
176c	Plug housing				1	
181a	Hex socket head cap screw				2	
198	Rubber seal				1	
198a	Washer				1	
198b	Washer				1	
198c	Disc spring				4	
1031	Connector pin				5	
-	Fastener				1	pcs
66	Washer				1	
67	Hex head screw				1	
-	Fastener				1	pcs
	Washer				6	
26	Hex socket head cap screw				6	
184b	Hex socket head cap screw				3	
193	Plug				1	
-	Rotor assembly				1	pcs
153	Ball bearing				1	
154	Ball bearing				1	
172	Shaft w/rotor				1	
188	Lock washer				1	
197	Washer		Internal diameter: 60		1	
			Outer diameter: 75			
			Thickness: 3			
37b	O-ring				1	pcs
49	Impeller				1	pcs
50	Volute casing				1	pcs
77	Seal housing				1	pcs
- 105	Shaft seal				1	pcs
	O-ring				1	
	O-ring				1	
	O-ring				1	
	Impeller				1	
	Shaft seal				1	
	Shaft seal				1	
	Shaft seal				1	
	Shaft seal				1	
150	Stator w/housing				1	pcs
181	Cable cpl.				1	pcs

Disclaimer: The information about the Grundfos pump in this document may be outdated.

Data may be subject to alterations without further notice.

Please contact us to verify the data above is still accurate/up-to-date.

All information is copyright Grundfos.



info@lenntech.com

<https://www.lenntech.com>

tel. +31 152 610 900

fax. +31 152 616 289