

## TP 32-50/2-A-O-A-GQQE 400Y 50HZ

Grundfos Pump 98346572



**Thank you for your interest in our products**


Please contact us for more information, or visit our website

<https://www.lenntech.com/grundfos/TP000/98346572/TP-32-50-2-A-O-A-GQQE.html>

[info@lenntech.com](mailto:info@lenntech.com)


tel. +31-15-261.09.00

fax. +31-15-261.62.89



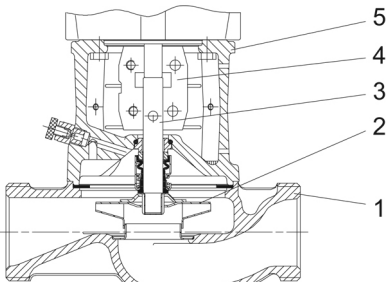
| Position | Qty. | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          | 1    | <p><b>TP 32-50/2 A-O-A-GQQE</b></p>  <p>Product No.: <a href="#">98346572</a></p> <p>Single-stage, close-coupled, volute pump with in-line suction and discharge ports of identical diameter. The pump is of the top-pull-out design, i.e. the power head (motor, pump head and impeller) can be removed for maintenance or service while the pump housing remains in the pipework.</p> <p>The pump is fitted with an unbalanced rubber bellows seal. The shaft seal is according to EN 12756. Pipework connection is via PN 10 union connections (ISO 228-1).</p> <p>The pump is fitted with a fan-cooled asynchronous motor.</p> <p><b>Further product details</b></p> <p><b>Pump</b></p> <p>Pump housing and pump head are electrocoated to improve the corrosion resistance. Electrocoating includes:</p> <ol style="list-style-type: none"> <li>1) Alkaline-based cleaning.</li> <li>2) Pretreatment with zinc phosphate coating.</li> <li>3) Cathodic electrocoating (epoxy).</li> <li>4) Curing of paint film at 200-250 °C.</li> </ol>  <ol style="list-style-type: none"> <li>1: Pump housing</li> <li>2: Impeller</li> <li>3: Shaft</li> <li>4: Coupling</li> <li>5: Pump head</li> </ol> <p>The pump housing is provided with a replaceable stainless steel/PTFE neck ring to reduce the amount of liquid running from the discharge side of the impeller to the suction side. The impeller is secured with a split cone pressed onto the shaft.</p> <p>The shaft seal is an unbalanced rubber bellows seal with reduced seal face. Due to the bellows, the seal does not wear the shaft, and the axial movement is not prevented by deposits on the shaft. The narrow seal face makes the seal perform well in high-viscosity and anti-freezing liquids.</p> <p>Primary seal:</p> <ul style="list-style-type: none"> <li>- Rotating seal ring material: Silicon carbide (SiC)</li> <li>- Stationary seat material: Silicon carbide (SiC)</li> </ul> <p>This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles.</p> <p>Secondary seal material: EPDM (ethylene-propylene rubber)</p> <p>EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils.</p> <p>A circulation of liquid through the duct of the air vent screw ensures lubrication and cooling of the shaft seal.</p> <p>The motor stool forms connection between the pump housing and the motor, and is equipped with a manual air vent screw for venting of the pump housing and the shaft seal chamber. The sealing between motor stool and pump housing is an O-ring or a flat gasket.</p> |

| Position | Qty. | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          |      | <p>The central part of the motor stool is provided with guards for protection against the shaft and coupling. Motor and pump shaft are connected via a rigid two-part coupling.</p> <p><b>Motor</b></p> <p>The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards. Electrical tolerances comply with IEC 60034.</p> <p>The motor is flange-mounted with tapped-hole flange (FT).</p> <p>Motor mounting designation in accordance with IEC 60034-7: IM B 14, IM V 18 (Code I) / IM 3601, IM 3611 (Code II).</p> <p>The motor does not incorporate motor protection and must be connected to a motor-protective circuit breaker which can be manually reset. The motor-protective circuit breaker must be set according to the rated current of the motor (I1/1).</p> <p><b>Technical data</b></p> <p><b>Liquid:</b></p> <p>Pumped liquid: Water</p> <p>Liquid temperature range: -25 .. 60 °C</p> <p>Liquid temperature during operation: 20 °C</p> <p>Density: 998.2 kg/m³</p> <p><b>Technical:</b></p> <p>Speed for pump data: 2800 rpm</p> <p>Rated flow: 4.91 m³/h</p> <p>Rated head: 3.29 m</p> <p>Actual impeller diameter: 68 mm</p> <p>Primary shaft seal: GQQE</p> <p>Curve tolerance: ISO9906:2012 3B</p> <p><b>Materials:</b></p> <p>Pump housing: Cast iron<br/>EN-JL1020<br/>ASTM A48-25B</p> <p>Impeller: Composite PES/PP 30% GF</p> <p><b>Installation:</b></p> <p>Range of ambient temperature: -30 .. 40 °C</p> <p>Maximum operating pressure: 10 bar</p> <p>Flange standard: UNION</p> <p>Pipe connection: G 2</p> <p>Pressure rating: PN 10</p> <p>Port-to-port length: 180 mm</p> <p>Flange size for motor: FT75</p> <p><b>Electrical data:</b></p> <p>Motor type: SIEMENS</p> <p>Rated power - P2: 0.12 kW</p> <p>Power (P2) required by pump: 0.12 kW</p> <p>Mains frequency: 50 Hz</p> <p>Rated voltage: 3 x 220-240D/380-415Y V</p> <p>Rated current: 0,59/0,34 A</p> <p>Cos phi - power factor: 0,80-0,72</p> <p>Rated speed: 2800-2850 rpm</p> <p>Number of poles: 2</p> <p>Enclosure class (IEC 34-5): 55 Dust/Jetting</p> <p>Insulation class (IEC 85): F</p> <p><b>Others:</b></p> <p>Minimum efficiency index, MEI ≥: --.-</p> <p>ErP status: EuP Standalone/Prod.</p> <p>Net weight: 8.1 kg</p> <p>Gross weight: 9.1 kg</p> <p>Shipping volume: 0.02 m³</p> |


98346572 TP 32-50/2 50 Hz

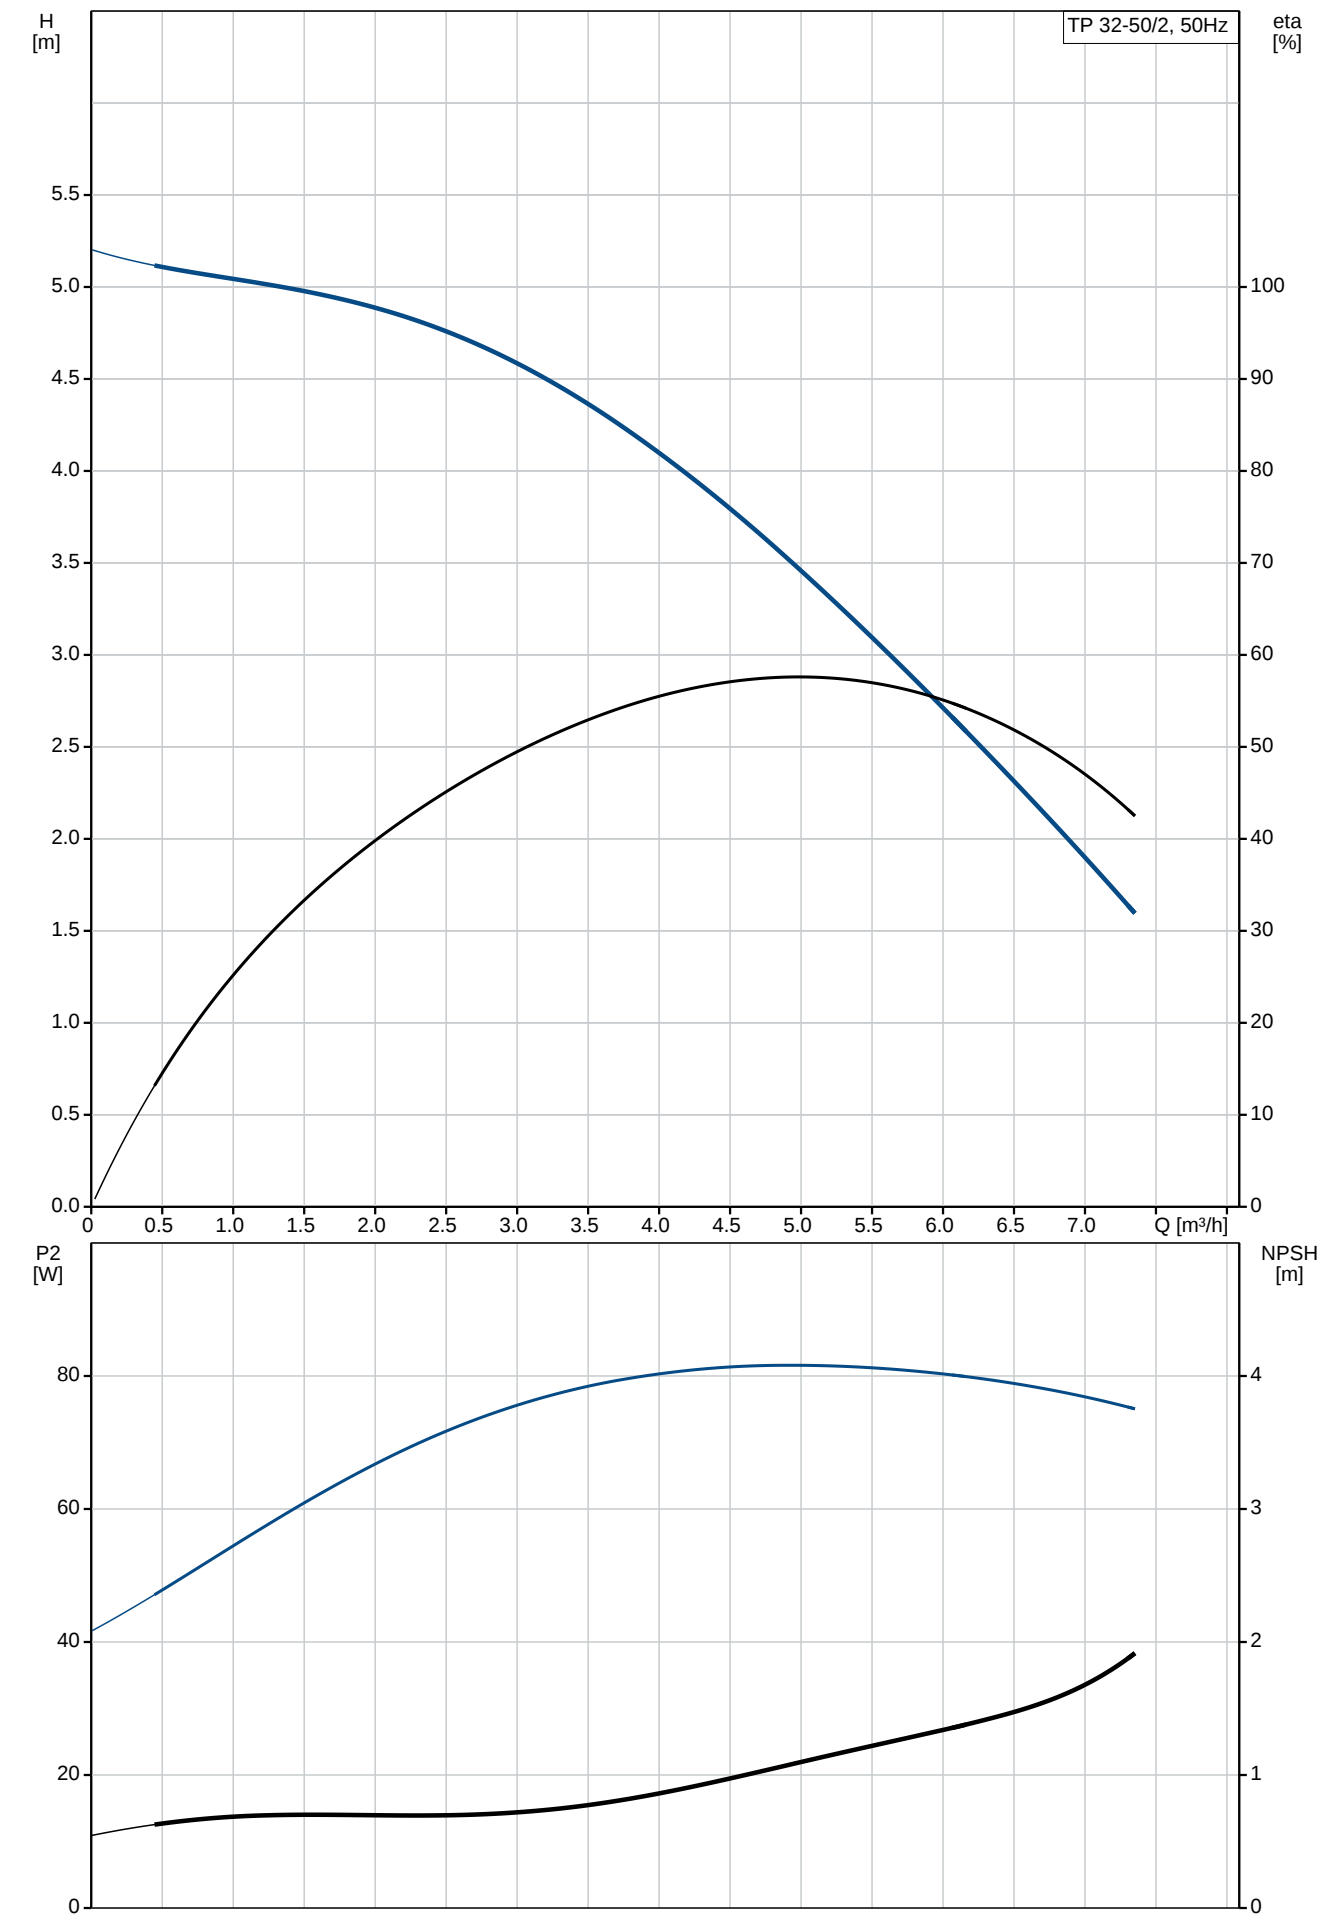


| Description                          | Value                                  |
|--------------------------------------|----------------------------------------|
| <b>General information:</b>          |                                        |
| Product name:                        | TP 32-50/2 A-O-A-GQQE                  |
| Product No:                          | 98346572                               |
| EAN number:                          | 5711493379737                          |
| <b>Technical:</b>                    |                                        |
| Speed for pump data:                 | 2800 rpm                               |
| Rated flow:                          | 4.91 m³/h                              |
| Rated head:                          | 3.29 m                                 |
| Head max:                            | 50 dm                                  |
| Actual impeller diameter:            | 68 mm                                  |
| Primary shaft seal:                  | GQQE                                   |
| Curve tolerance:                     | ISO9906:2012 3B                        |
| Pump version:                        | A                                      |
| Model:                               | B                                      |
| <b>Materials:</b>                    |                                        |
| Pump housing:                        | Cast iron<br>EN-JL1020<br>ASTM A48-25B |
| Impeller:                            | Composite PES/PP 30% GF                |
| Material code:                       | A                                      |
| <b>Installation:</b>                 |                                        |
| Range of ambient temperature:        | -30 .. 40 °C                           |
| Maximum operating pressure:          | 10 bar                                 |
| Flange standard:                     | UNION                                  |
| Connect code:                        | O                                      |
| Pipe connection:                     | G 2                                    |
| Pressure rating:                     | PN 10                                  |
| Port-to-port length:                 | 180 mm                                 |
| Flange size for motor:               | FT75                                   |
| <b>Liquid:</b>                       |                                        |
| Pumped liquid:                       | Water                                  |
| Liquid temperature range:            | -25 .. 60 °C                           |
| Liquid temperature during operation: | 20 °C                                  |
| Density:                             | 998.2 kg/m³                            |
| <b>Electrical data:</b>              |                                        |
| Motor type:                          | SIEMENS                                |
| Rated power - P2:                    | 0.12 kW                                |
| Power (P2) required by pump:         | 0.12 kW                                |
| Mains frequency:                     | 50 Hz                                  |
| Rated voltage:                       | 3 x 220-240D/380-415Y V                |
| Rated current:                       | 0,59/0,34 A                            |
| Cos phi - power factor:              | 0,80-0,72                              |
| Rated speed:                         | 2800-2850 rpm                          |
| Number of poles:                     | 2                                      |
| Enclosure class (IEC 34-5):          | 55 Dust/Jetting                        |
| Insulation class (IEC 85):           | F                                      |
| Motor protec:                        | NONE                                   |
| Motor No:                            | 81602312                               |
| <b>Others:</b>                       |                                        |
| Minimum efficiency index, MEI ≥:     | --.-                                   |
| ErP status:                          | EuP Standalone/Prod.                   |
| Net weight:                          | 8.1 kg                                 |
| Gross weight:                        | 9.1 kg                                 |
| Shipping volume:                     | 0.02 m³                                |

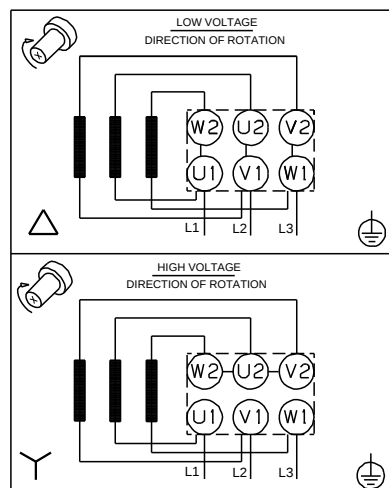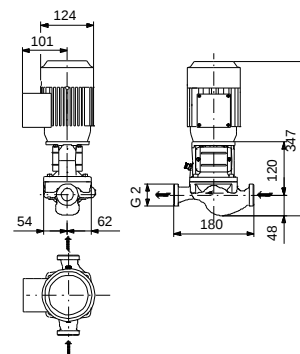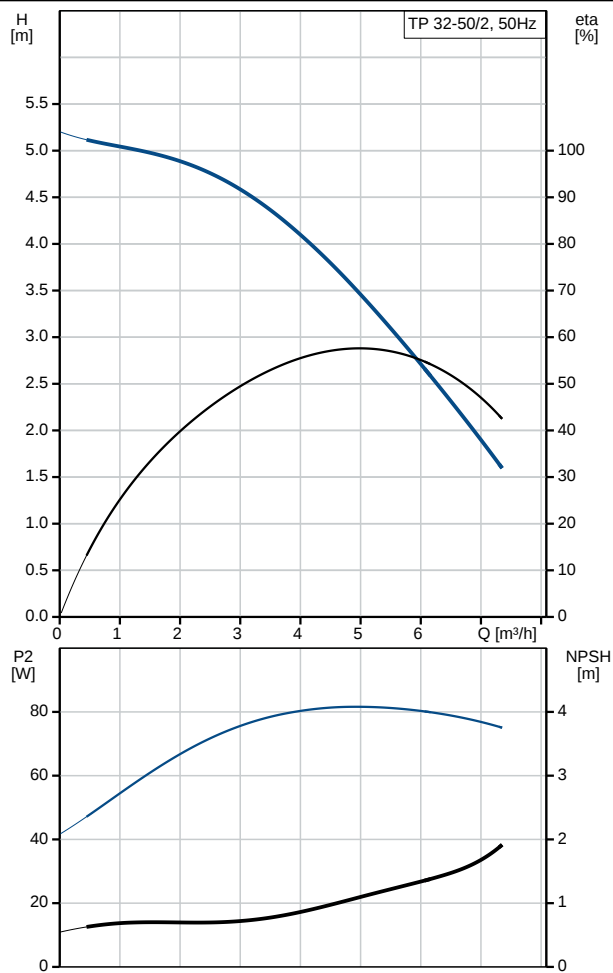

# 98346572 TP 32-50/2 50 Hz

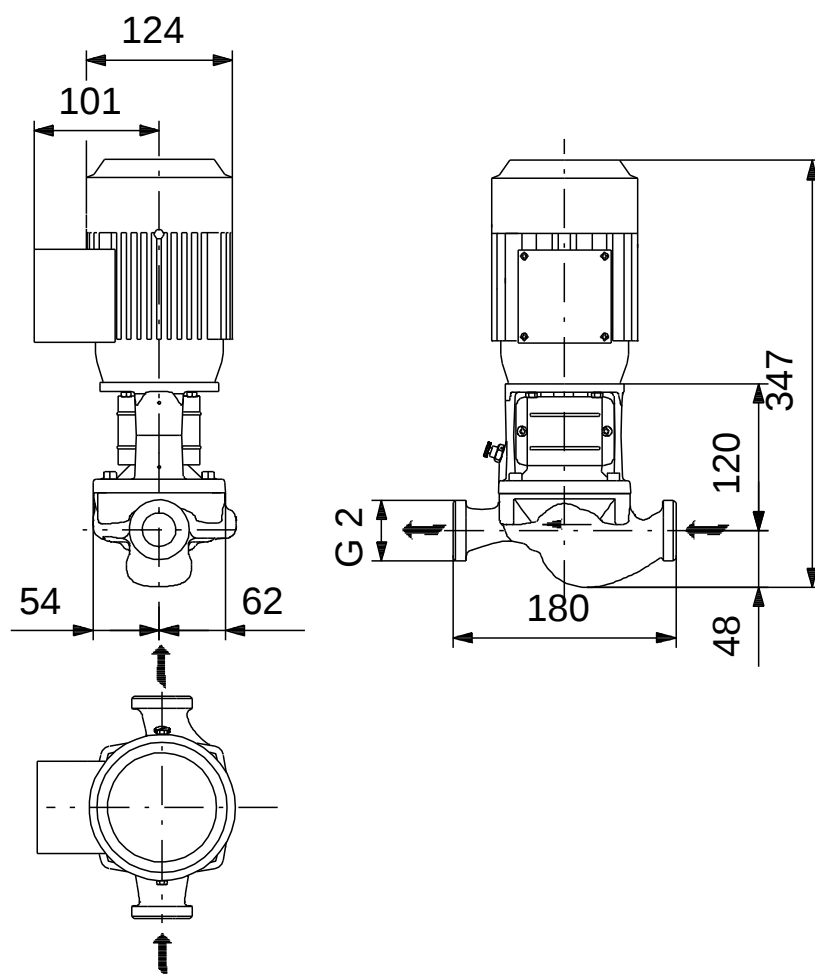

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.

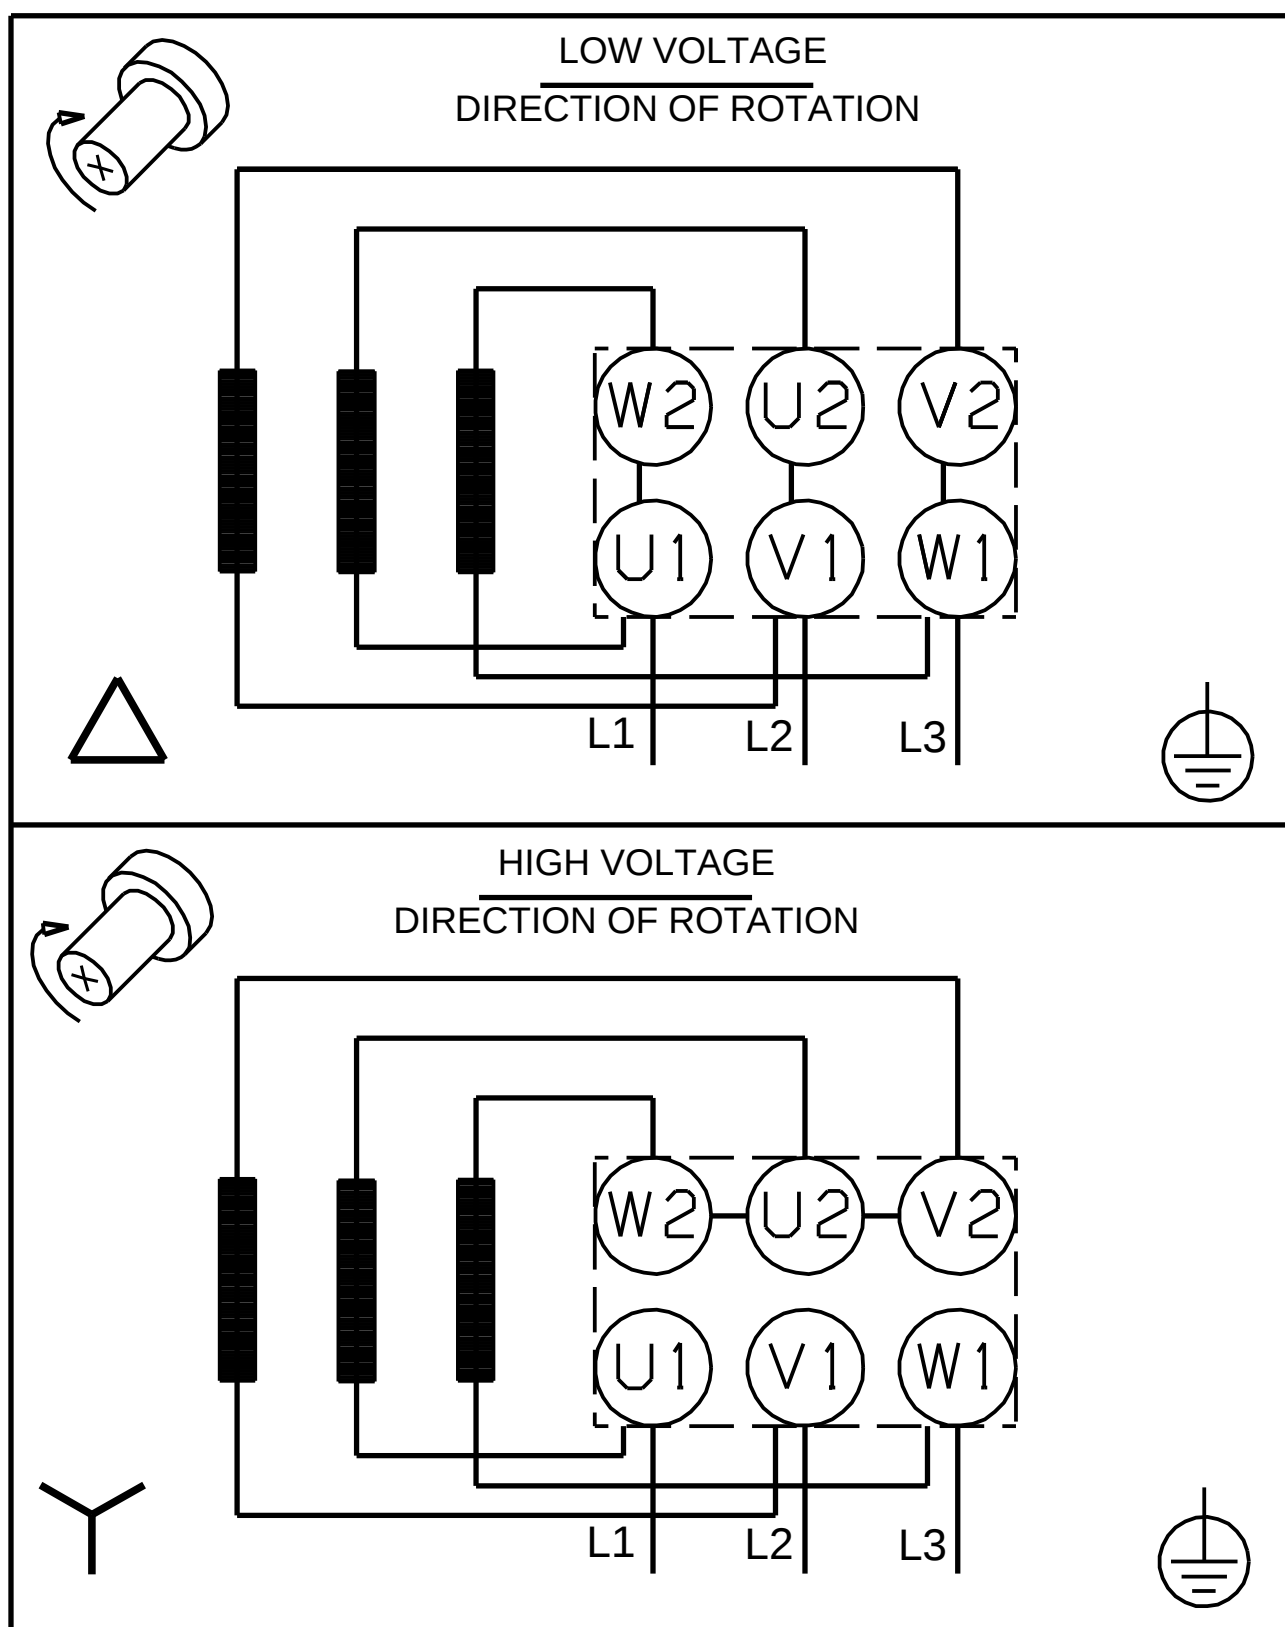

Note! All units are in [mm] unless others are stated.

*Disclaimer: The information about the Grundfos pump in this document may be outdated.  
Data may be subject to alterations without further notice.  
Please contact us to verify the data above is still accurate/up-to-date.*

*All information is copyright Grundfos.*



[info@lenntech.com](mailto:info@lenntech.com)

[www.lenntech.com](http://www.lenntech.com)

tel. +31-15-261.09.00

fax. +31-15-261.62.89