

CM5-7 O-R-I-E-AQQE C-A-A-N

Grundfos Pump 98482190



Thank you for your interest in our products

Please contact us for more information, or visit our website

<https://www.lenntech.com/grundfos/CMSP0/98482190/CM5-7-O-R-I-E-AQQE.html>

info@lenntech.com

tel. +31-15-261.09.00

fax. +31-15-261.62.89

Position	Qty.	Description
	1	CM5-7 O-R-I-E-AQQE  Product No.: 98482190 Compact, reliable, horizontal, multistage, end-suction centrifugal pump with axial suction port and radial discharge port. The pump is self-priming and can create a suction lift of up to 8 m metres. Pump materials in contact with the liquid are in stainless steel. The mechanical shaft seal is a special designed, unbalanced O-ring seal. Pipework connection is via internal Whitworth pipe threads, Rp (ISO 7/1). The pump is fitted with a 1-phase, foot-mounted, fan-cooled asynchronous motor. Further product details Pump and motor are integrated in a compact and user-friendly design. The pump is fitted to a low base plate, making it ideal for installation in systems where compactness is important. The pump can create a suction lift of 8 m metres in less than five minutes. Compared to other self-priming pumps, the CM pump offers lower noise level, higher reliability as well as compactness and customised solutions. The pump is made of stainless-steel components (EN 1.4301 / AISI 304) and is therefore corrosion-proof. The state-of-the-art design and materials of the shaft seal ensure high wear resistance, improved sticking and dry-running capabilities and long operating life. Servicing the pump requires no special service tools. Service parts are in stock for quick delivery and are available as kits, single parts or bulk. Service videos are available on www.youtube.com. Pump A combination of a stop ring and a Nord-lock® washer secures a tight and reliable fixation of the impeller spacing pipes to the splined pump shaft. It is possible to remove and fit the hydraulic parts from the pump side. The inlet and outlet port are integrated in the pump sleeve. The inlet part, chambers and discharge part are hold together by four staybolts and a retaining flange. The pump is fitted with an unbalanced O-ring seal with a rigid torque transmission system. It has a fixed seal driver ensuring a reliable rotation of all parts. The dynamic secondary seal is an O-ring. Primary seal: - Rotating seal ring material: Silicon carbide (SiC) - Stationary seat material: Silicon carbide (SiC) This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles. Secondary seal material: EPDM (ethylene-propylene rubber) EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils.  The pump shaft is connected to the motor shaft through a left thread and tight fit. The shaft cannot be dismantled. Motor The motor is a totally enclosed, fan-cooled motor with principal dimensions to EN 50347. Electrical tolerances comply with EN 60034.

The motor has built-in thermal protection (PTO current and temperature sensors) in accordance with IEC 60034-11 and requires no further motor protection. The protection reacts to both slow- and quick-rising temperatures, e.g. constant overload and stalled conditions.

As the thermal protection incorporates automatic reset, the motor must be connected in a way which ensures that the automatic reset cannot cause accidents.

Technical data

Liquid:

Pumped liquid: Water
Liquid temperature range: 0 .. 60 °C
Liquid temperature during operation: 20 °C
Density: 998.2 kg/m³

Technical:

Speed for pump data: 2900 rpm
Rated flow: 4.7 m³/h
Rated head: 53.8 m
Primary shaft seal: AQQE
Approvals on nameplate: CE,WRAS,ACS,TR,EAC
Curve tolerance: ISO9906:2012 3B
Self-priming: 8 m

Materials:

Pump housing: Stainless steel
DIN W.-Nr. 1.4301
AISI 304
Impeller: Stainless steel
DIN W.-Nr. 1.4301
AISI 304
Rubber: EPDM

Installation:

Maximum ambient temperature: 55 °C
Maximum operating pressure: 10 bar
Max pressure at stated temp: 10 bar / 60 °C
Flange standard: WHITWORTH THREAD RP
Pump inlet: Rp 1
Pump outlet: Rp 1


Electrical data:

Motor type: 90SA
Rated power - P₂: 1.3 kW
Mains frequency: 50 Hz
Rated voltage: 1 x 220-240 V
Service factor: 1
Rated current: 8,4-8,0 A
Starting current: 340 %
Rated speed: 2710-2710 rpm
Enclosure class (IEC 34-5): IP55
Insulation class (IEC 85): F




Others:

Minimum efficiency index, MEI ≥: 0,7
Net weight: 23.4 kg
Gross weight: 25.9 kg

98482190 CM5-7 50 Hz

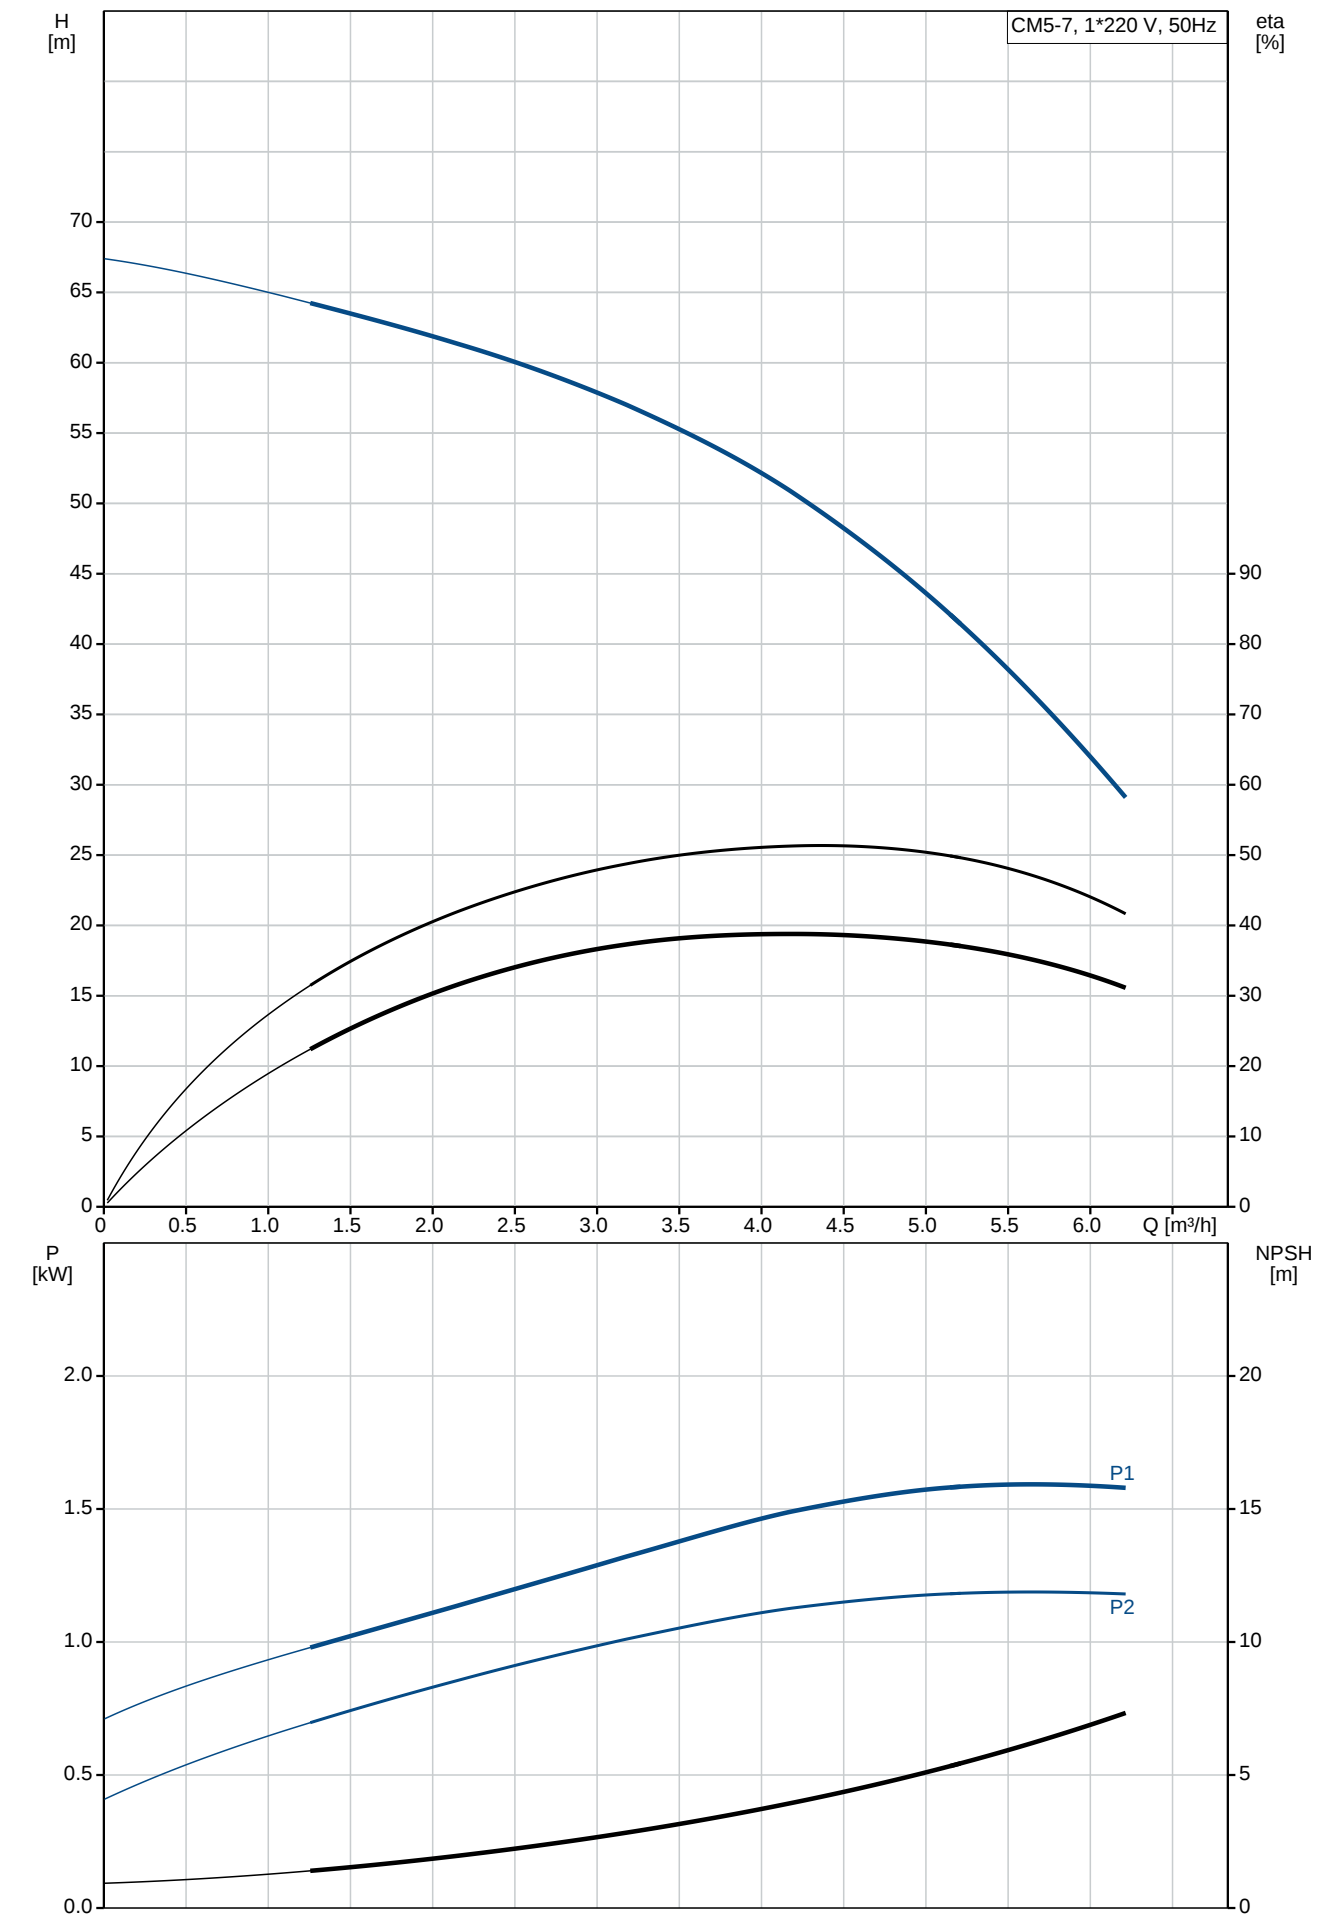

Description	Value
General information:	
Product name:	CM5-7 O-R-I-E-AQQE
Product No:	98482190
EAN number:	5711495880897
Technical:	
Speed for pump data:	2900 rpm
Rated flow:	4.7 m³/h
Rated head:	53.8 m
Impellers:	7
Primary shaft seal:	AQQE
Approvals on nameplate:	CE,WRAS,ACS,TR,EAC
Curve tolerance:	ISO9906:2012 3B
Pump version:	O
Model:	A
Self-priming:	8 m
Materials:	
Pump housing:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Impeller:	Stainless steel
	DIN W.-Nr. 1.4301
	AISI 304
Material code:	I
Rubber:	EPDM
Code for rubber:	E
Installation:	
Maximum ambient temperature:	55 °C
Maximum operating pressure:	10 bar
Max pressure at stated temp:	10 bar / 60 °C
Flange standard:	WHITWORTH THREAD RP
Connect code:	R
Pump inlet:	Rp 1
Pump outlet:	Rp 1
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 60 °C
Liquid temperature during operation:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	90SA
Rated power - P2:	1.3 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Service factor:	1
Rated current:	8,4-8,0 A
Starting current:	340 %
Rated speed:	2710-2710 rpm
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Motor protec:	TP211
Others:	
Minimum efficiency index, MEI ≥:	0,7
Net weight:	23.4 kg
Gross weight:	25.9 kg

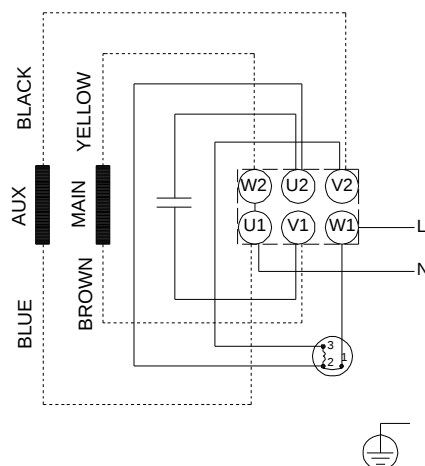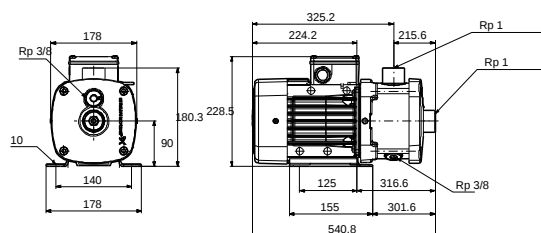
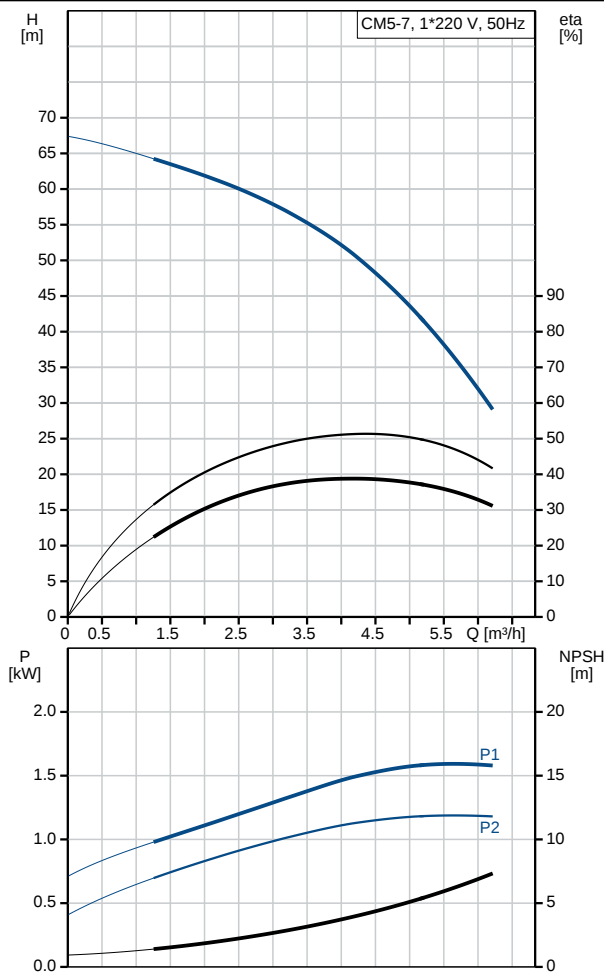


98482190 CM5-7 50 Hz


cos phi
eta

CM5-7 + 90SA 1.3 kW 1*220 V, 50 Hz, SF = 1

I [A]

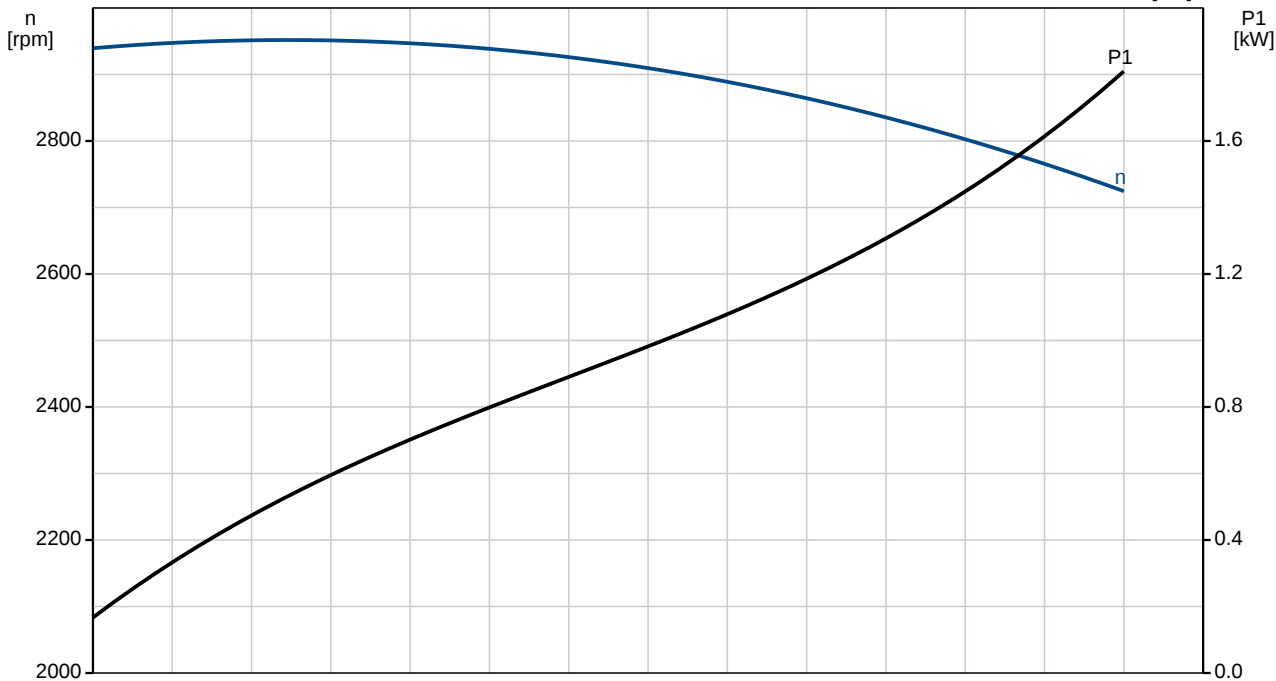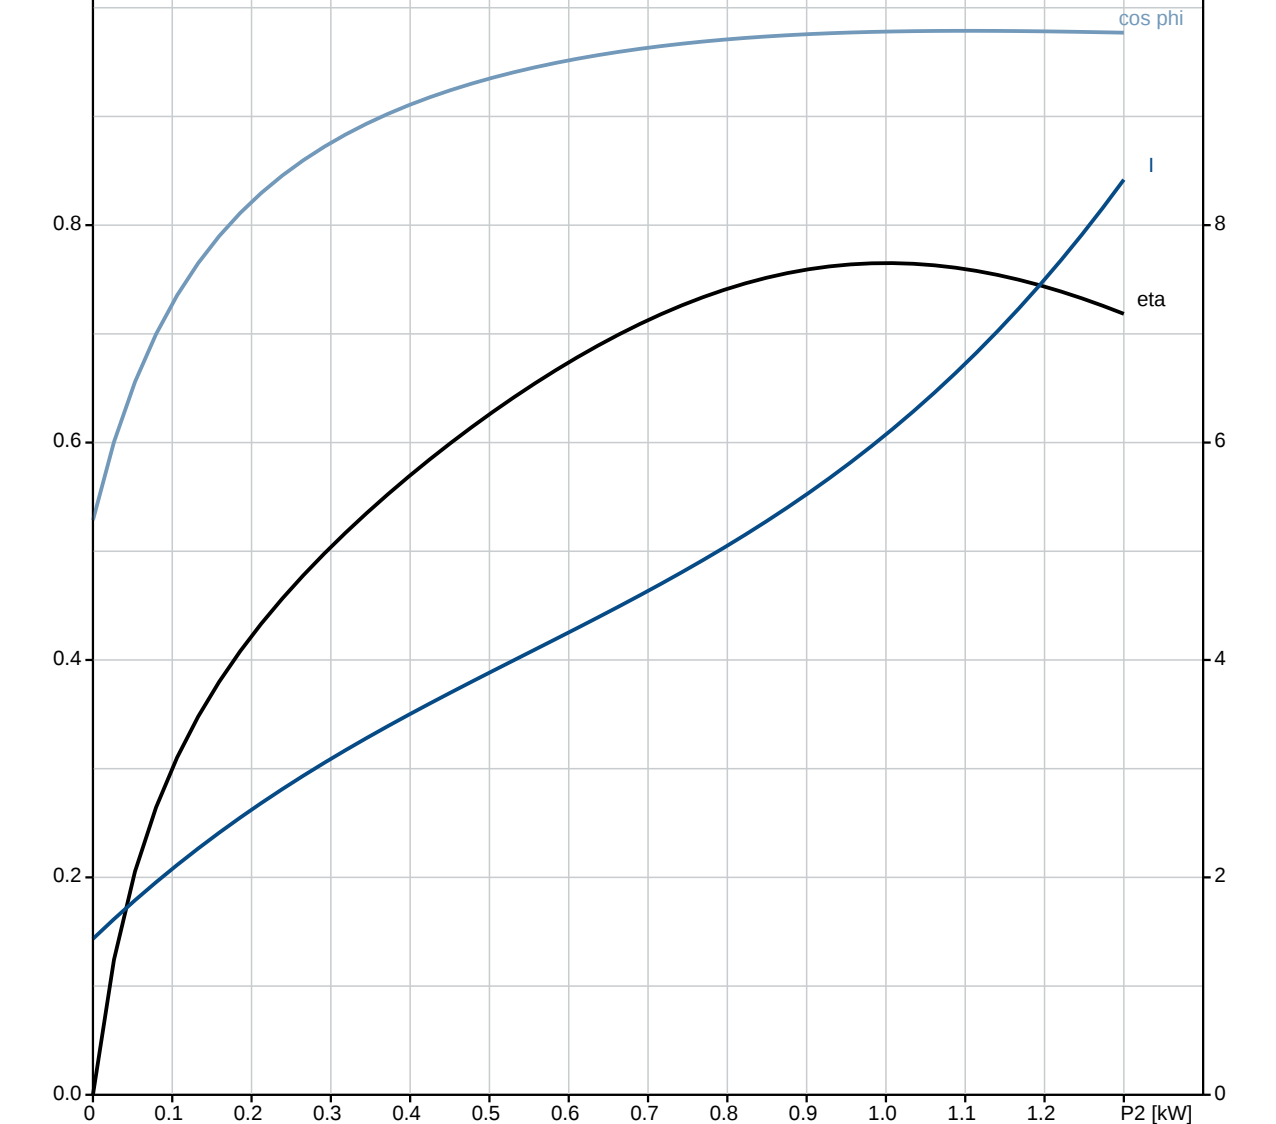


98482190 CM5-7 50 Hz

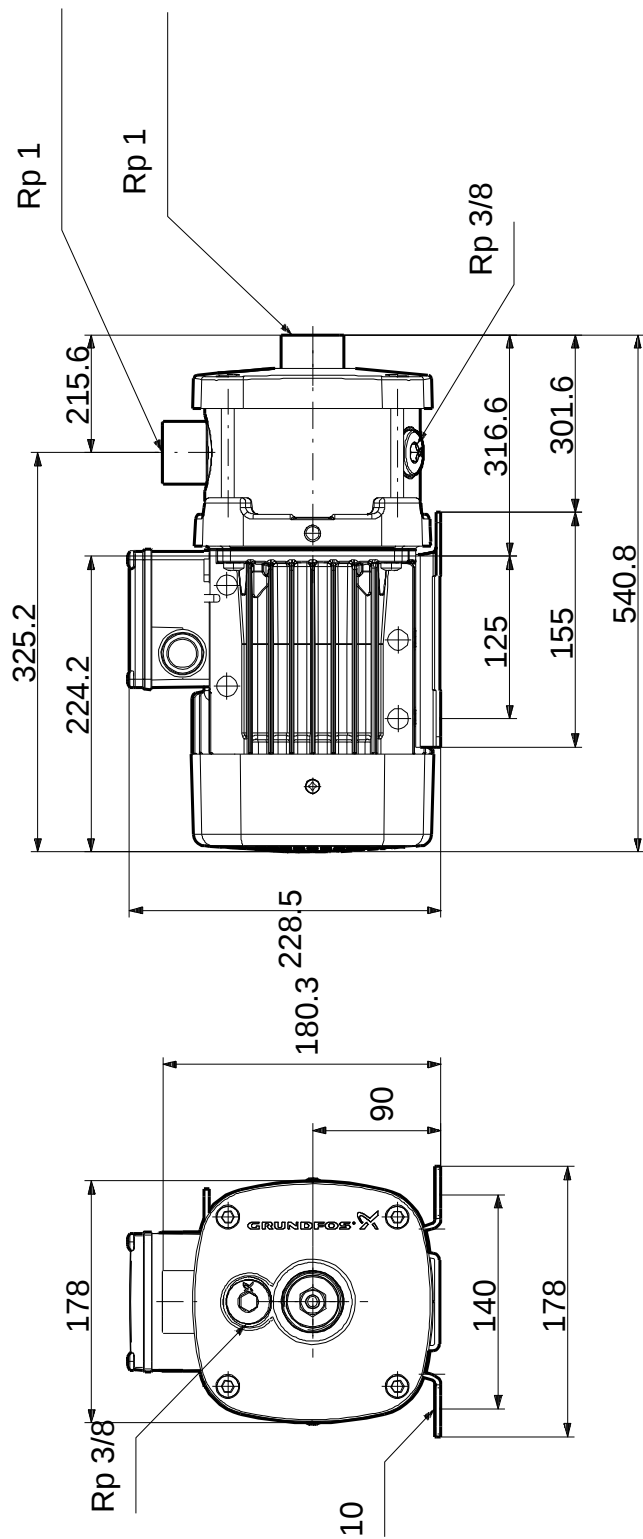

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

98482190 CM5-7 50 Hz

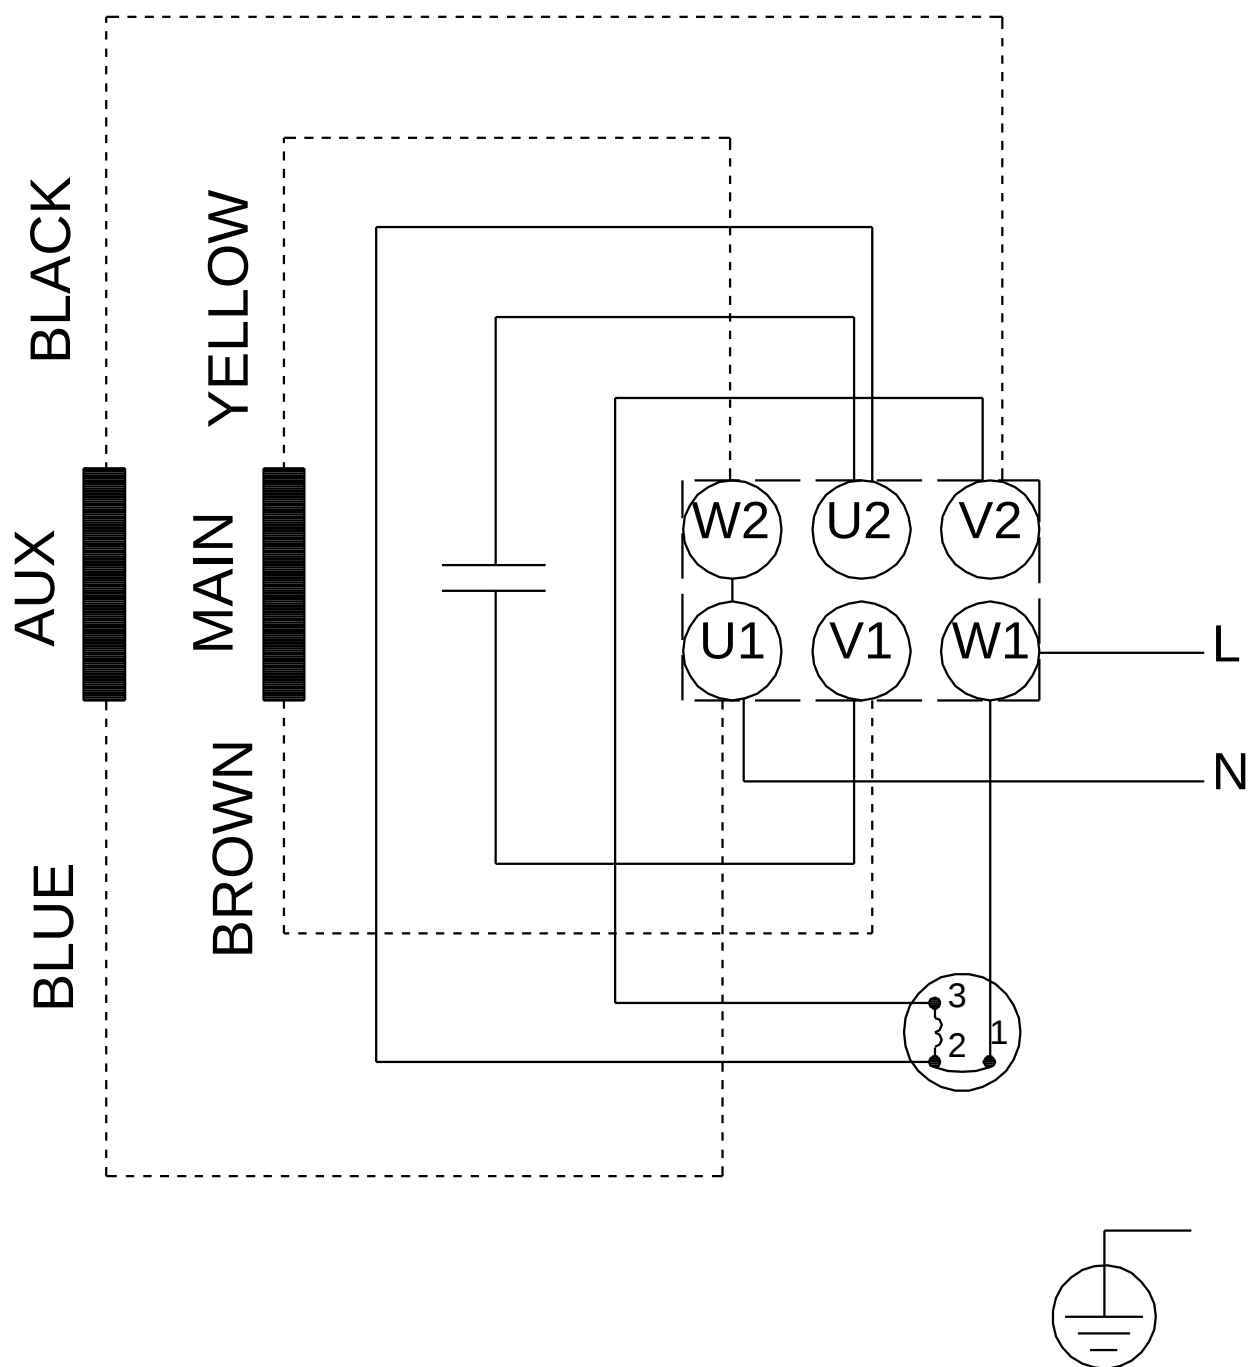

Note! All units are in [mm] unless others are stated.

*Disclaimer: The information about the Grundfos pump in this document may be outdated.
Data may be subject to alterations without further notice.
Please contact us to verify the data above is still accurate/up-to-date.*

All information is copyright Grundfos.



info@lenntech.com

www.lenntech.com

tel. +31-15-261.09.00

fax. +31-15-261.62.89