

MAGNA

CG8

STRONG ACID CATION

POLYSTYRENIC GEL
8% CROSSLINKED
SODIUM FORM

ResinTech CG8 is a strong acid cation resin in sodium form. It is amber in color and made from 8% cross-linked gel. It is a workhorse cation resin optimized for commercial/industrial and residential softening applications that require good regeneration efficiency and oxidative stability. CG8 is intended for use in all commercial and industrial applications including both softening and demineralization.

APPLICATIONS

- Softening - Industrial
- Demineralization
- Iron Removal
- Ammonia Removal



TYPICAL PROPERTIES & PHYSICAL CHARACTERISTICS	
Polymer Matrix	Styrenic Gel
Ionic Form	Sodium
Functional Group	Sulfonic Acid
Physical Form	Spherical Beads
Particle Size	16 to 50 US Mesh (297 - 1190 µm)
% < 50 mesh (300µm)	< 1%
Minimum Sphericity	93%
Uniformity Coefficient	1.6
Reversible Swelling	Na to H 5% to 9%
Temp Limit	280°F (138°C)
Capacity (meq/mL)	2.0
Moisture Retention	42% to 49%
Shipping Weight	51 - 53 lbs/ft³ (817 - 849 g/L)
Color	Amber
Regenerability	Yes

CERTIFICATIONS

- WQA Gold Seal*
- Kosher Certified
- Halal Certified
- FDA Compliance**

* NSF/ANSI/CAN 61: Drinking Water System Components - Health Effects

** Paragraph 21CFR173.25 of the Food Additives Regulations of the US FDA

Revision 1.3

ResinTech, Inc.®

PACKAGING OPTIONS




- 500 ml samples
- 1 ft³ bags
- 1 ft³ boxes
- 1 ft³ drums
- 7 ft³ drums
- 42 ft³ supersacks

RESINTECH INC.
 INNOVATIONS IN ION EXCHANGE

MAGNA CG8

STRONG ACID CATION

POLYSTYRENIC GEL
8% CROSSLINKED
SODIUM FORM

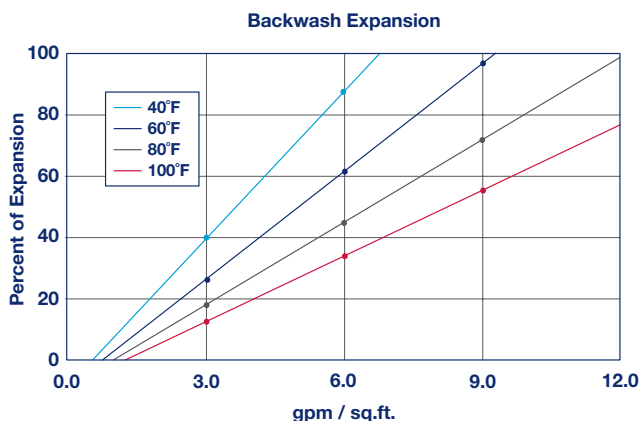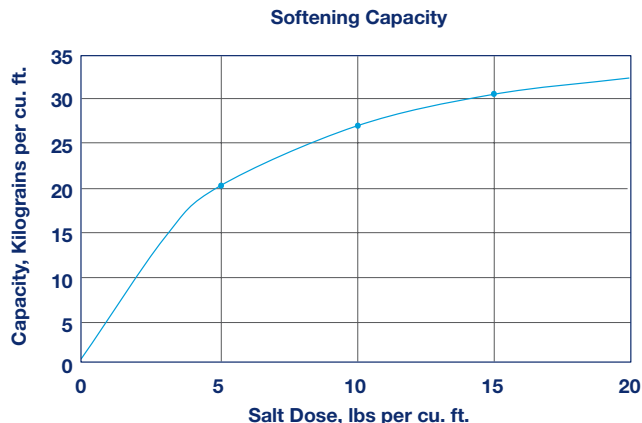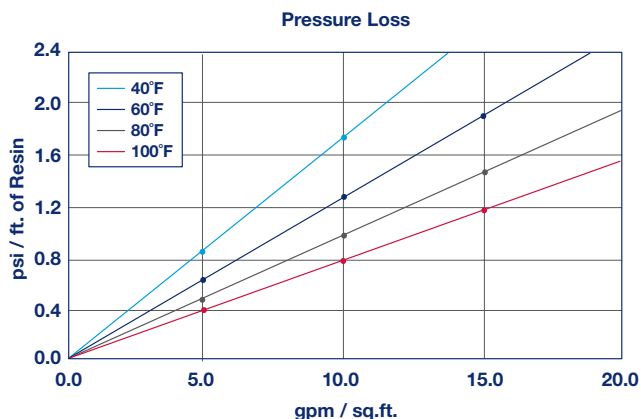

Capacity and leakage data are based on the following: 2:1 Ca:Mg ratio, 500 ppm TDS as CaCO₃, 0.2% hardness in the salt and 10% brine concentration applied co-currently through the resin over 30 minutes. No engineering downgrade has been applied.

SUGGESTED OPERATING CONDITIONS

Maximum continuous temperature	280°F
Sodium form	
Minimum bed depth	24 inches
Backwash expansion	25 to 50 percent
Maximum pressure loss	25 psi
Operating pH range	0 to 14 SU
Regenerant Concentration	
Hydrogen cycle	5 to 10 percent HCl
Hydrogen cycle	1 to 8 percent H ₂ SO ₄
Salt cycle	10 to 15 percent NaCl
Regenerant level	4 to 15 lbs./cu.ft.
Regenerant flow rate.	0.5 to 1.5 gpm/cu.ft.
Regenerant contact time	>20 minutes
Displacement flow rate	Same as dilution water
Displacement volume	10 to 15 gallons/cu.ft.
Rinse flow rate	Same as service flow
Rinse volume	35 to 60 gallons/cu.ft.
Service flow rate	1 to 10 gpm/cu.ft.

Note: These guidelines describe average low risk operating conditions. They are not intended to be absolute minimums or maximums. For operation outside these guidelines, contact ResinTech Technical Support

IRON REMOVAL

CG8 has good capacity for ferrous iron. Iron content in the feedwater should not be more than 1 mg/L Fe per each 17 mg/L of hardness.

AMMONIA REMOVAL

CG8 is slightly selective for ammonia compared to sodium but hardness is much more preferred. Ammonia is not ionized at pH above 9 and is not well removed when the pH is significantly alkaline.

LENNTech
WATER TREATMENT SOLUTIONS

info@lenntech.com Tel. +31-152-610-900
www.lenntech.com Fax. +31-152-616-289

RESINTECH INC.
INNOVATIONS IN ION EXCHANGE