

SP5A- 4 0.37kW 1x220V 50Hz

Grundfos Pump 5002104



Thank you for your interest in our products



Please contact us for more information, or visit our website

<https://www.lenntech.com/grundfos/SPFAM/5002104/SP-5A-4.html>

info@lenntech.com


tel. +31-15-261.09.00

fax. +31-15-261.62.89



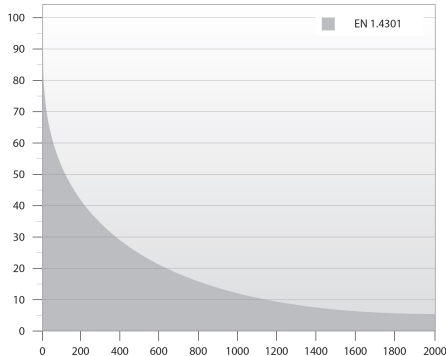
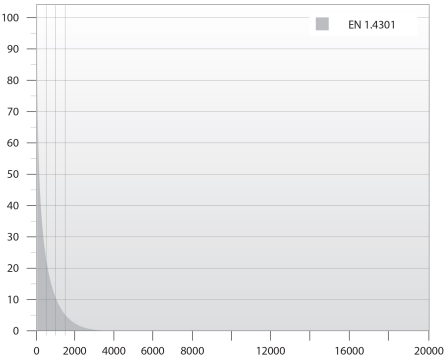
Position	Qty.	Description
	1	SP 5A-4  Note! Product picture may differ from actual product Product No.: 5002104 Submersible borehole pump, suitable for pumping clean water. Can be installed vertically or horizontally. All steel components are made in stainless steel, EN 1.4301 (AISI 304), that ensures high corrosive resistance. This pump carries drinking water approval. The pump is fitted with a 0.37 kW MS402 motor with sand shield, lip seal, water-lubricated journal bearings and a volume compensating diaphragm. The motor is a canned type submersible motor offering good mechanical stability and high efficiency. Suitable for temperatures up to 40 °C. The motor is not fitted with a temperature sensor. If temperature monitoring is desired, a Pt1000 sensor can be fitted. The motor is for direct-on-line starting (DOL). Further product details The pump is suitable for applications similar to the following: - raw-water supply - irrigation - groundwater lowering - pressure boosting - fountain applications. The Grundfos SP pump is renowned for its high efficiency and already complies with the requirements of the Minimum Efficiency Index, and therefore Grundfos is amongst the best in class within submersible pumps.  Pump All pump surfaces that are in contact with pumped liquids are made in stainless steel which makes them corrosion- and wear-resistant. The corrosion diagram below shows the capabilities of the pump and motor in relation to the temperature in Celsius (y-axis) and the concentration of chloride in ppm (x-axis).   The elastomer parts in the pump are made of NBR (Nitrile-Butadiene Rubber) and TPU (Thermoplastic Poly-Urethane) which offers good wear resistance and long service intervals. The top chamber features a built-in non-return valve to prevent backflow and reduce the risk of water hammer.

Position	Qty.	Description
		The suction interconnector is fitted with a strainer to prevent large particles from entering the pump. The suction interconnector is designed to comply with NEMA standards for motor mounting/dimensions. Motor The stator is hermetically encapsulated in stainless steel and the windings are embedded in polymer compound. This results in high mechanical stability, optimum cooling and reduces the risk of short circuits in the windings. The shaft seal is of the lip seal type characterised by low friction against the rotor shaft. The NBR elastomer offers good wear resistance, good elasticity and resistance to particles. The rubber material is approved for use in potable water. The motor can be fitted with a Pt100 or Pt1000 sensor that together with a control unit ensures that the maximum operating temperature conditions are not exceeded. Liquid: Pumped liquid: Water Maximum liquid temperature: 40 °C Max liquid t at 0.15 m/sec: 40 °C Liquid temperature during operation: 20 °C Density: 998.2 kg/m³ Technical: Speed for pump data: 2900 rpm Rated flow: 5 m³/h Rated head: 16 m Shaft seal for motor: LIPSEAL Approvals on nameplate: CE,EAC Curve tolerance: ISO9906:2012 3B Motor version: T40 Materials: Pump: Stainless steel EN 1.4301 Impeller: Stainless steel EN 1.4301 Motor: Stainless steel DIN W.-Nr. 1.4301 AISI 304 Installation: Pump outlet: Rp1 1/2 Motor diameter: 4 inch Electrical data: Motor type: MS402 Type of motor: CSIR Rated power - P2: 0.37 kW Mains frequency: 50 Hz Rated voltage: 1 x 230 V Rated current: 3.95 A Starting current: 380 % Cos phi - power factor: 0,77 Rated speed: 2860 rpm Start. method: direct-on-line Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): B Built-in temp. transmitter: no Others: Minimum efficiency index, MEI ≥: 0.56 ErP status: EuP Standalone/Prod. Net weight: 9.6 kg Gross weight: 10.9 kg Shipping volume: 8 m³


5002104 SP 5A-4 50 Hz

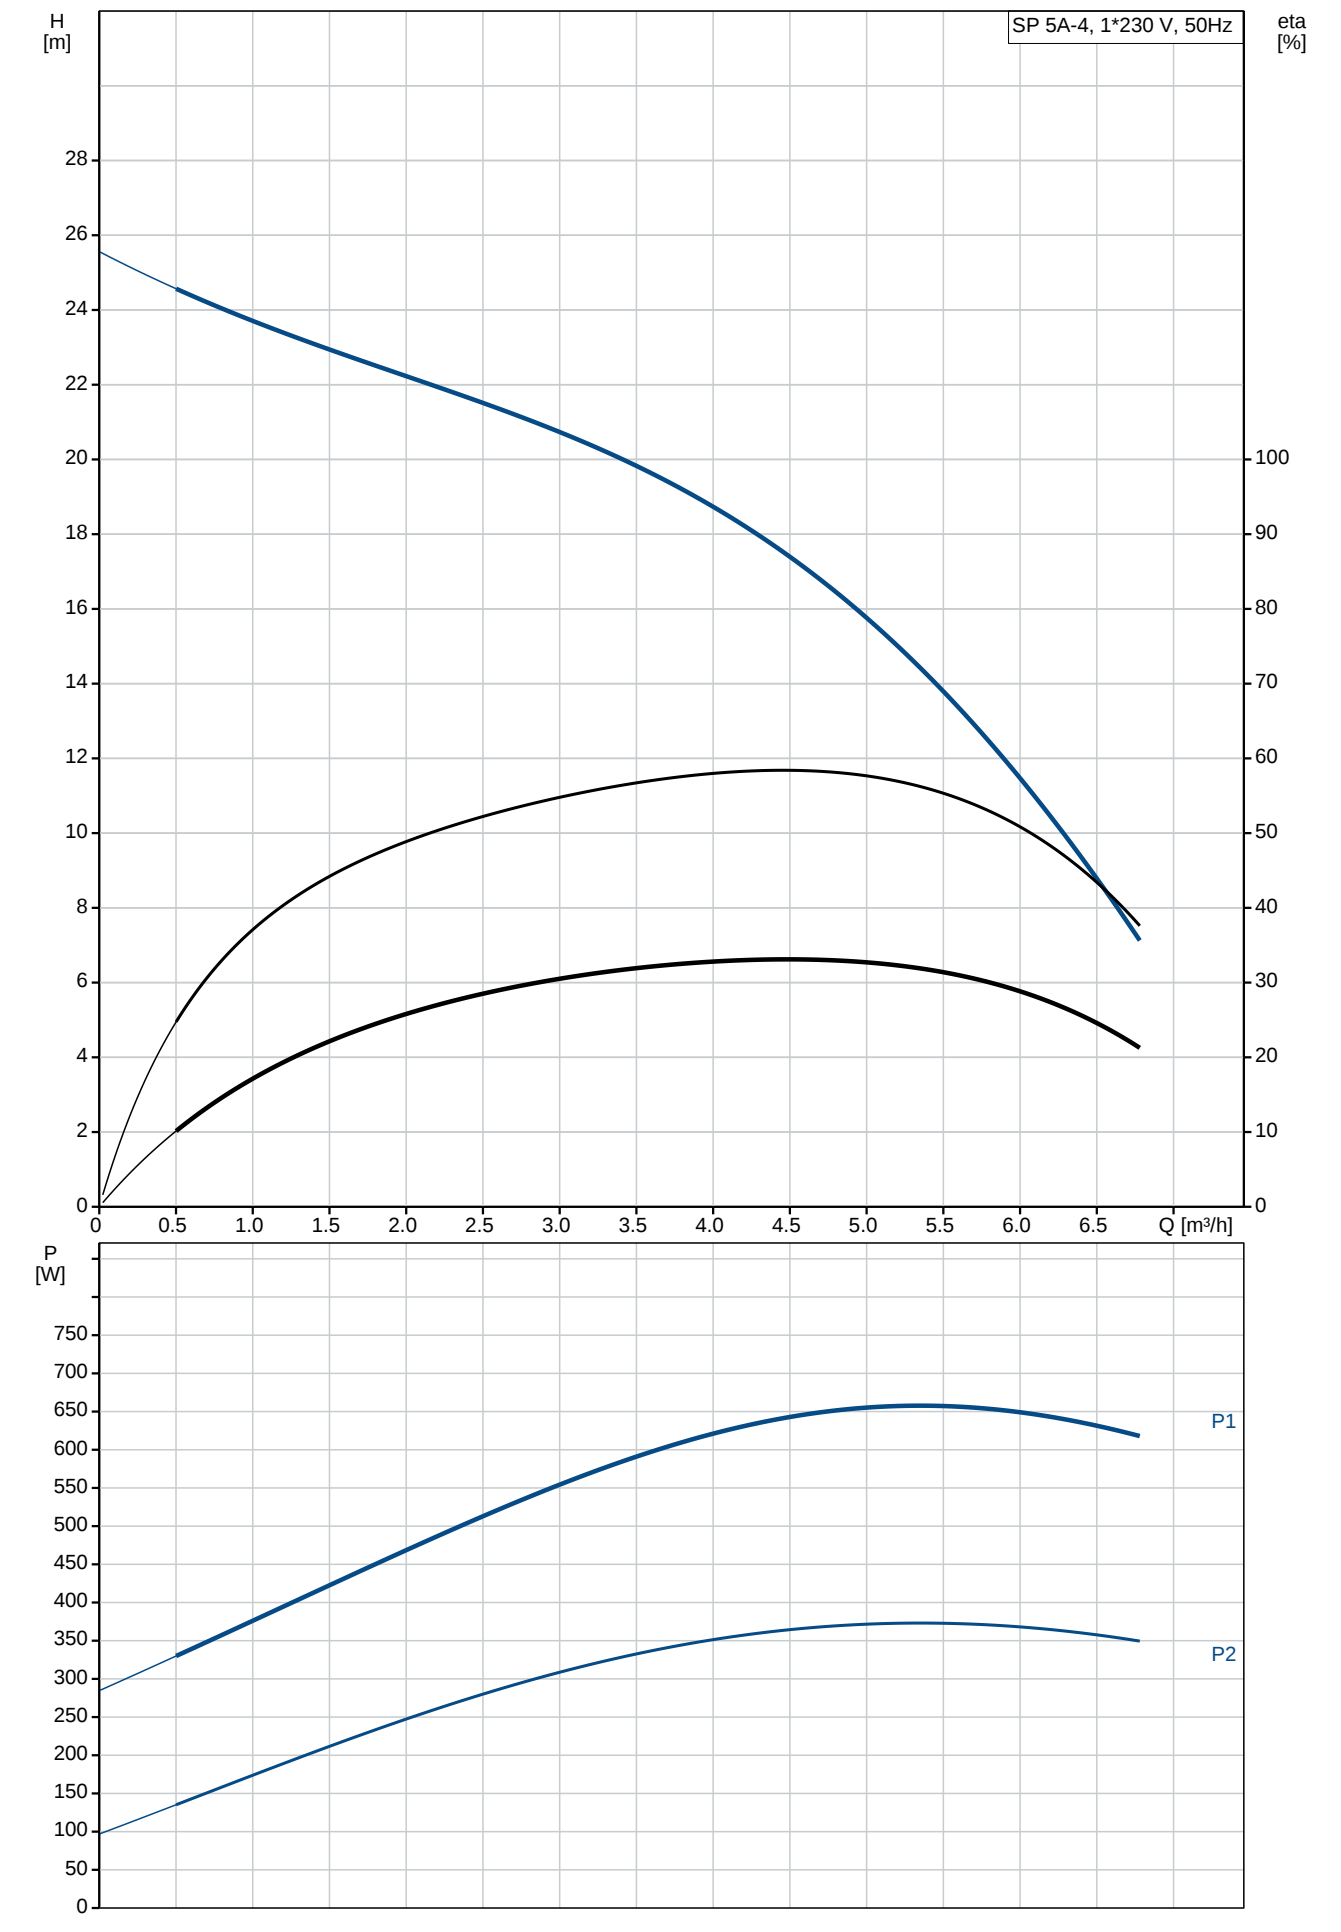


Description	Value
General information:	
Product name:	SP 5A-4
Product No:	5002104
EAN number:	5700390227258
Technical:	
Speed for pump data:	2900 rpm
Rated flow:	5 m³/h
Rated head:	16 m
Stages:	4
Shaft seal for motor:	LIPSEAL
Approvals on nameplate:	CE,EAC
Curve tolerance:	ISO9906:2012 3B
Model:	A
Valve:	pump with built-in non-return valve
Motor version:	T40
Materials:	
Pump:	Stainless steel EN 1.4301
Impeller:	Stainless steel EN 1.4301
Motor:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
Installation:	
Pump outlet:	Rp1 1/2
Motor diameter:	4 inch
Liquid:	
Pumped liquid:	Water
Maximum liquid temperature:	40 °C
Max liquid t at 0.15 m/sec:	40 °C
Liquid temperature during operation:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	MS402
Type of motor:	CSIR
Applic. motor:	NEMA
Rated power - P2:	0.37 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Rated current:	3.95 A
Starting current:	380 %
Cos phi - power factor:	0,77
Rated speed:	2860 rpm
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	B
Motor protec:	CONTACT
Thermal protec:	internal
Built-in temp. transmitter:	no
Motor No:	79213102
Others:	
Minimum efficiency index, MEI ≥:	0.56
ErP status:	EuP Standalone/Prod.
Net weight:	9.6 kg
Gross weight:	10.9 kg
Shipping volume:	8 m³

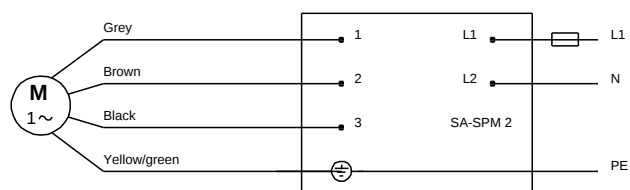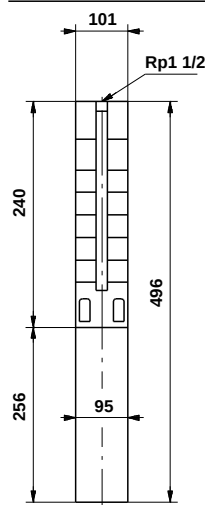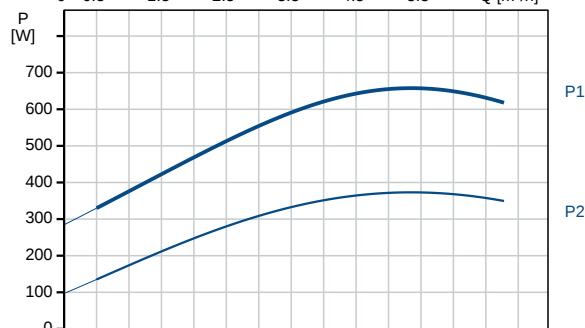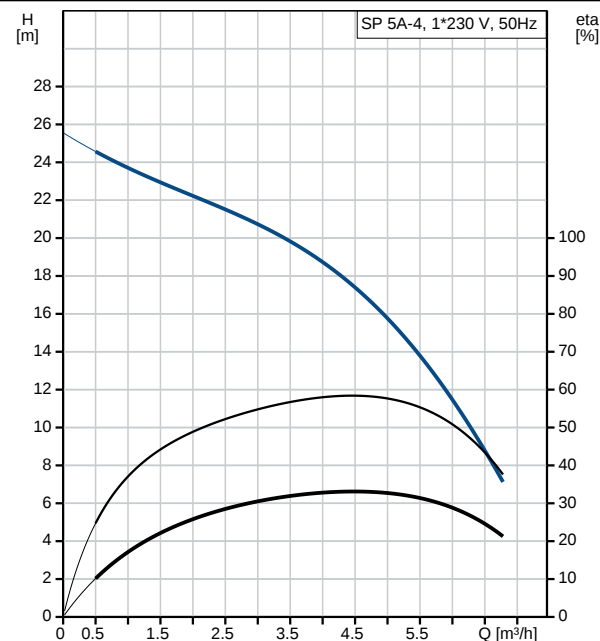

5002104 SP 5A-4 50 Hz

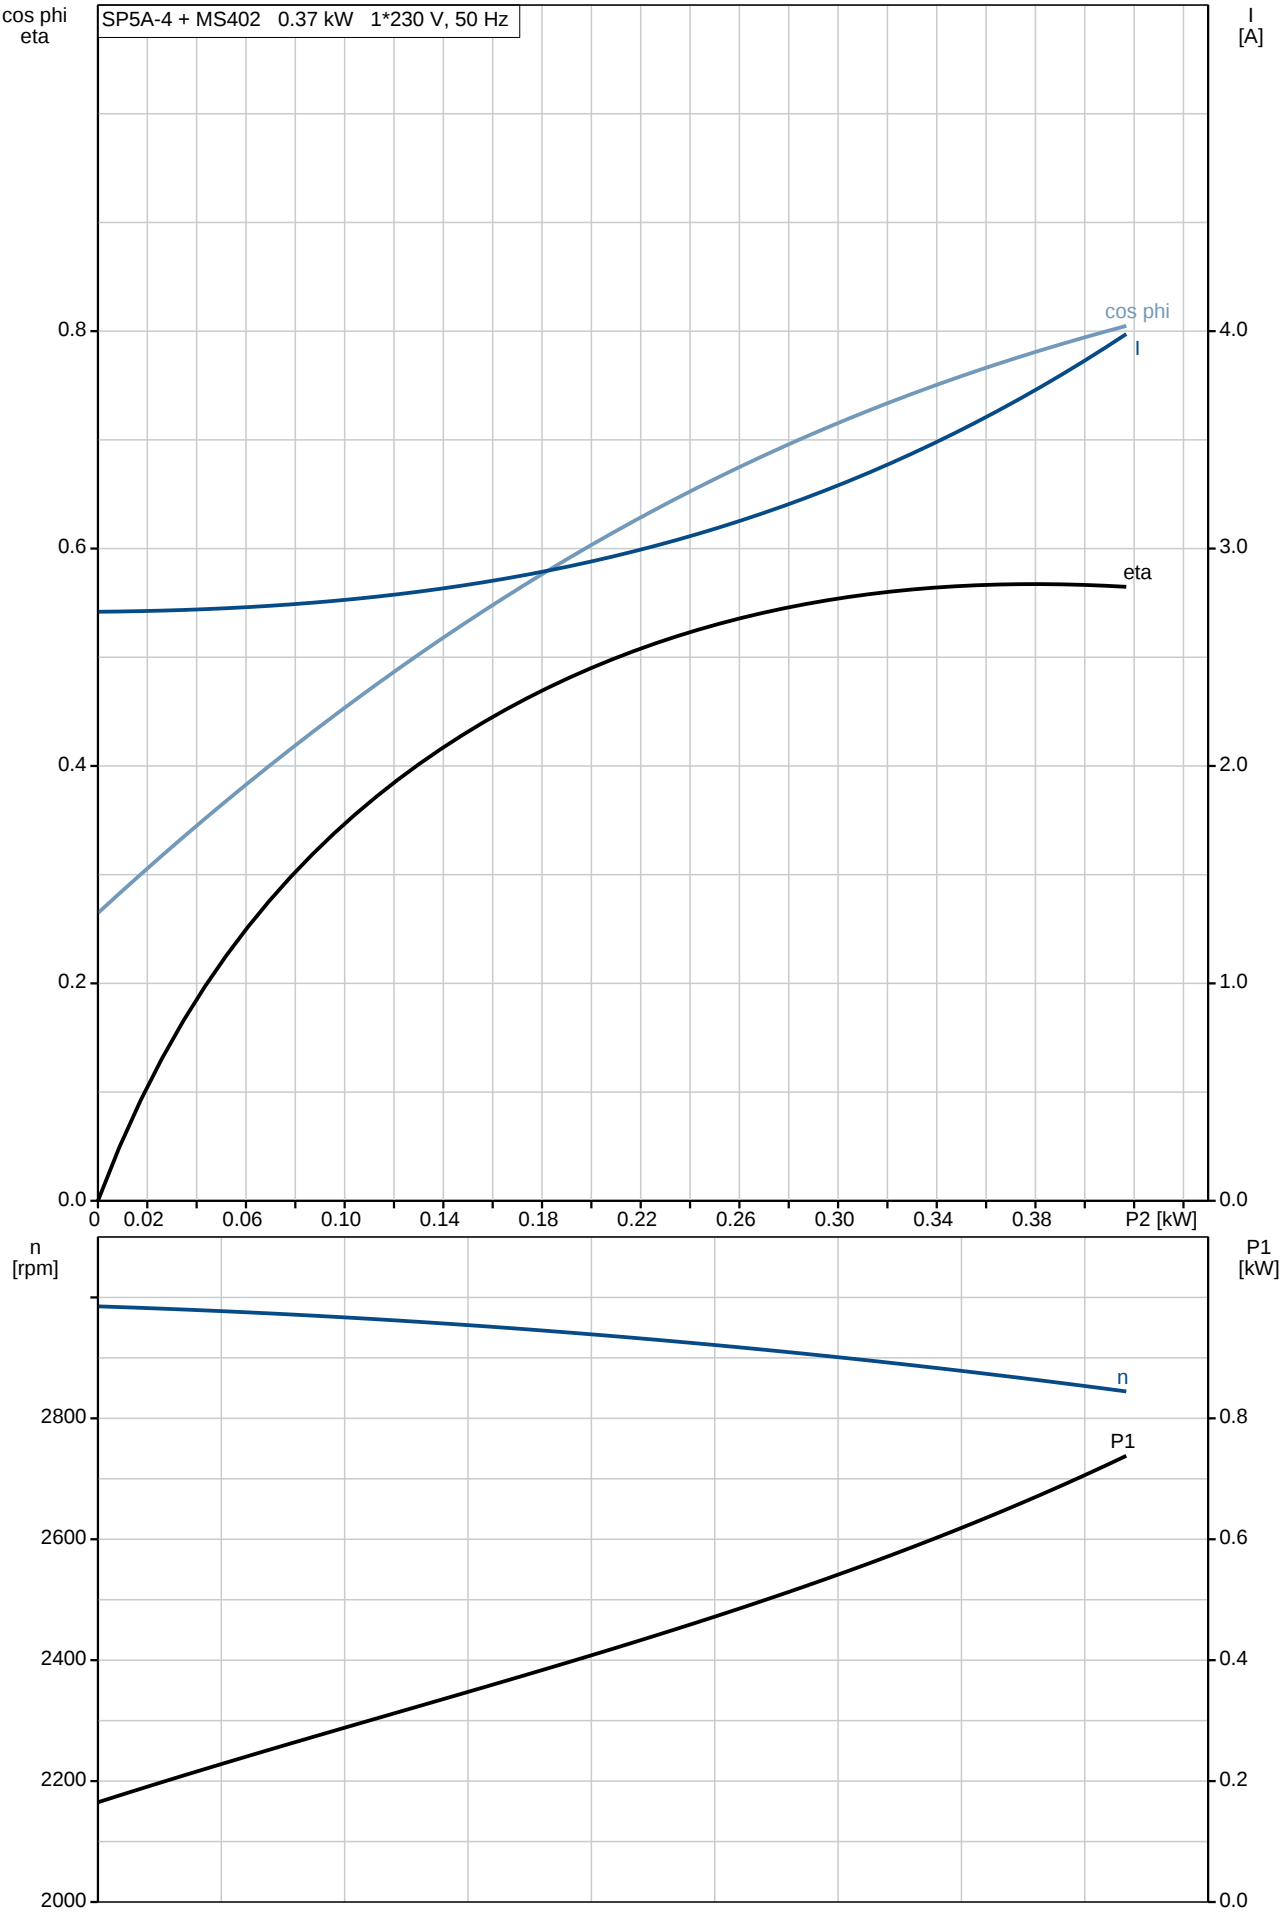


5002104 SP 5A-4 50 Hz

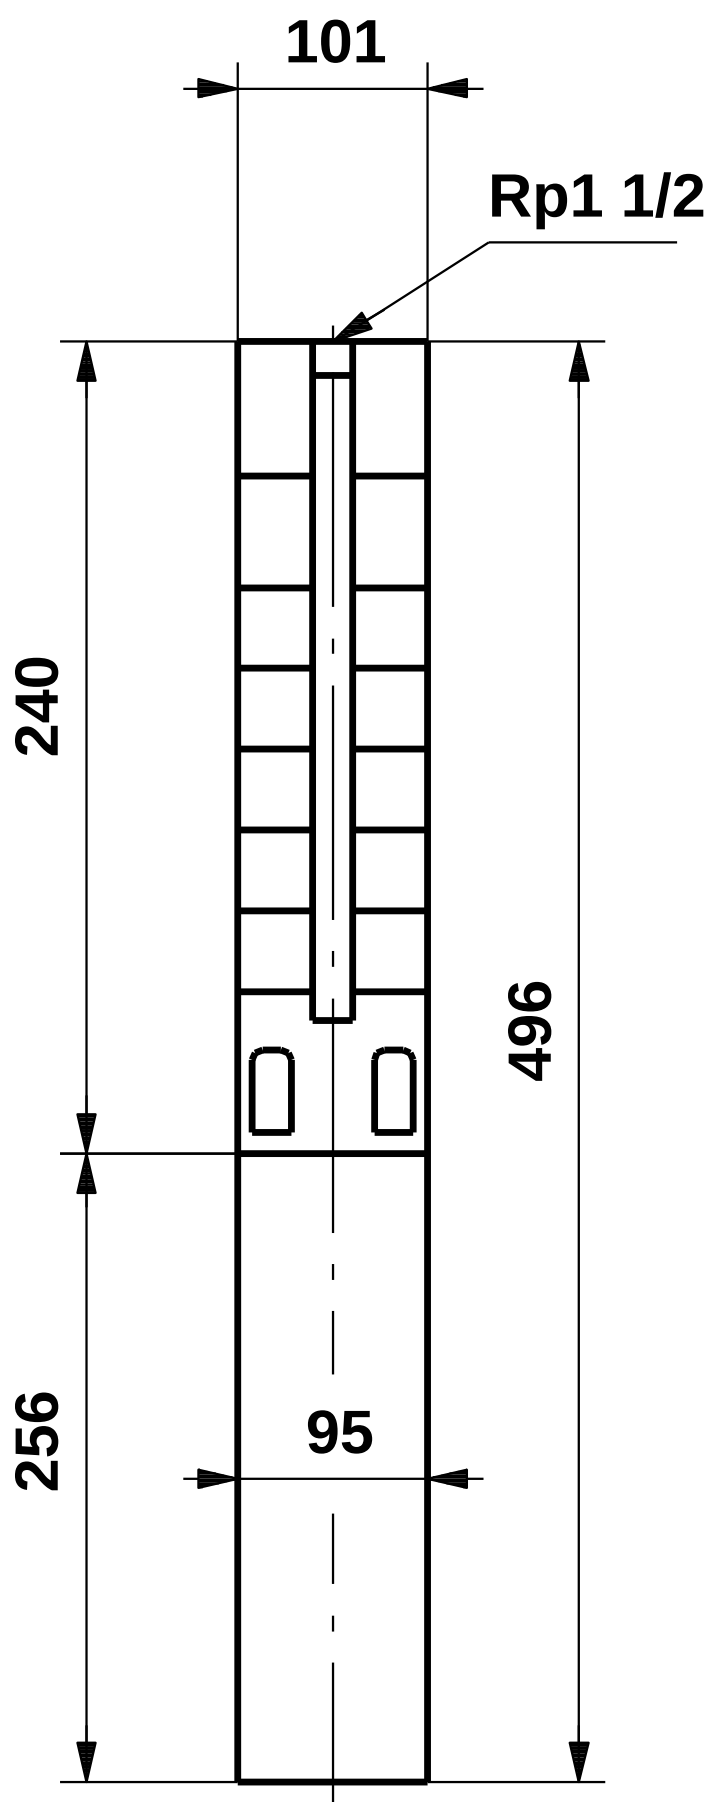

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

5002104 SP 5A-4 50 Hz

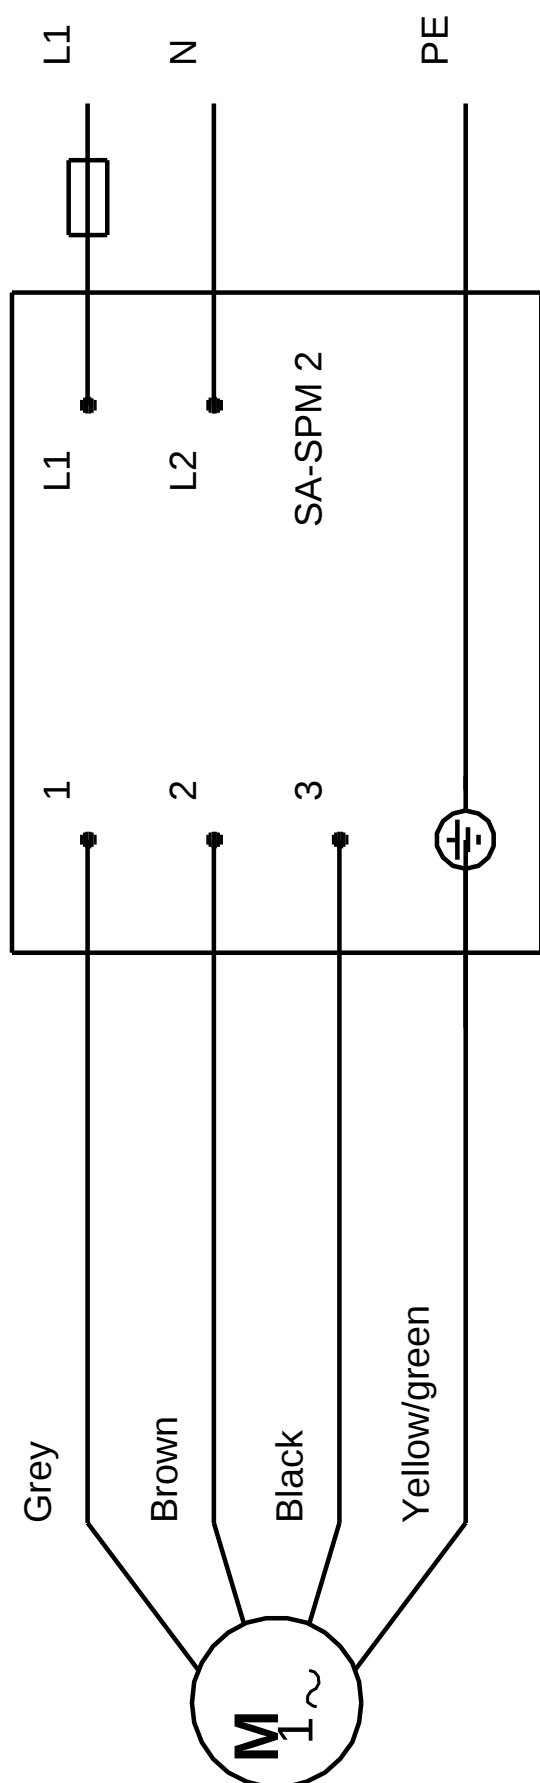

Note! All units are in [mm] unless others are stated.

*Disclaimer: The information about the Grundfos pump in this document may be outdated.
Data may be subject to alterations without further notice.
Please contact us to verify the data above is still accurate/up-to-date.*

All information is copyright Grundfos.



info@lenntech.com

www.lenntech.com

tel. +31-15-261.09.00

fax. +31-15-261.62.89