

CRIE15-12 AN-FGJ-I-E-HQQE 3x400 60 HZ

Grundfos pump 96514592



Thank you for your interest in our products. Please contact us for more information, or visit our website




<https://www.lenntech.com/grundfos/CRIE15/96514592/CRIE-15-12-AN-FGJ-I-E-HQQE.html>

info@lenntech.com

tel. +31 152 610 900

fax. +31 152 616 289


Position	Qty.	Description
	1	CRIE 15-12 N-FGJ-A-E-HQQE  Note! Product picture may differ from actual product Product No.: On request Vertical, multistage centrifugal pump with inlet and outlet ports on same the level (inline). Pump materials in contact with the liquid are in stainless steel. A cartridge shaft seal ensures high reliability, safe handling, and easy access and service. Power transmission is via a rigid split coupling. Pipe connection is via combined DIN-ANSI-JIS flanges. The pump is fitted with a 3-phase, fan-cooled asynchronous motor. The motor includes a frequency converter and PI controller in the motor terminal box. This enables continuously variable control of the motor speed, which again enables adaptation of the performance to a given requirement. An operating panel on the motor terminal box enables setting of required setpoint as well as setting of pump to "Min." or "Max." operation or to "Stop". The operating panel has indicator lights for "Operation" and "Fault". Communication with the pump is possible by means of Grundfos GO Remote (accessory). The remote control enables further settings as well as reading out of a number of parameters such as "Actual value", "Speed", "Power input" and total "Power consumption". The terminal box holds terminals for these connections: • pump start/stop input (potential-free contact) • remote setpoint setting via analog signal, 0-10 V, 0(4)-20 mA • 10 V voltage supply for setpoint potentiometer, I_{max} = 5 mA • three analog sensor inputs, 0-10 V, 0(4)-20 mA; the factory-fitted pressure sensor is connected to one of these inputs • 24 V voltage supply for sensor, I_{max} = 40 mA • one analog output • three digital inputs • two Pt100 inputs • two potential-free fault signal relays with changeover contact, reporting "Fault", "Operation" or "Ready" • RS-485 GENIbus connection • interface for Grundfos CIM fieldbus module. Further product details The pump is equipped with a pressure sensor registering pump outlet pressure and enabling controlled pump operation based on constant pressure. An operating panel on the motor terminal box enables setting of required setpoint as well as setting of pump to "Min." or "Max." operation or to "Stop". The operating panel has indicator lights for "Operation" and "Fault". Communication with the pump is possible by means of Grundfos GO Remote (accessory). The remote control enables further settings as well as reading out of a number of parameters such as "Actual value", "Speed", "Power input" and total "Power consumption". Steel, cast iron and aluminium components have an epoxy-based coating made in a cathodic electro-deposition (CED) process. CED is a high-quality dip-painting process where an electrical field around the products ensures deposition of paint particles as a thin, well-controlled layer on the surface. An integral part of the process is a pretreatment. The entire process consists of these elements: 1) Alkaline-based cleaning. 2) Zinc phosphating.

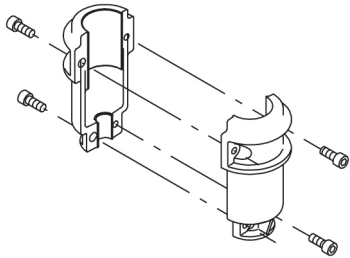Position	Qty.	Description
		3) Cathodic electro-deposition. 4) Curing to a dry film thickness 18-22 my m. The colour code for the finished product is NCS 9000/RAL 9005. Pump A long split coupling connects the pump and motor shaft. It is enclosed in the motor stool by means of two coupling guards. The long coupling makes it possible to replace the shaft seal without removing the motor from the pump.  The pump head and flange for motor mounting is made in one piece (cast iron). The pump head cover is a separate component (stainless steel). The pump head has a combined 1/2" priming plug and vent screw.  The pump is fitted with a balanced O-ring seal unit with a rigid torque-transmission system. This seal type is assembled in a cartridge unit which makes replacement safe and easy. Due to the balancing, this seal type is suitable for high-pressure applications. The cartridge construction also protects the pump shaft from possible wear from a dynamic O-ring between pump shaft and shaft seal. Primary seal: • Rotating seal ring material: silicon carbide (SiC) • Stationary seat material: silicon carbide (SiC) This material pairing is used where higher corrosion resistance is required. The high hardness of this material pairing offers good resistance against abrasive particles. Secondary seal material: EPDM (ethylene-propylene rubber) EPDM has excellent resistance to hot water. EPDM is not suitable for mineral oils.  The shaft seal is screwed into the pump head. The chambers and impellers are made of stainless-steel sheet. The chambers are provided with a PTFE neck ring offering improved sealing and high efficiency. The impellers have smooth surfaces, and the shape of the blades ensure a high efficiency. The pump has a stainless steel base mounted on a separate base plate. This base and base plate are kept in position by the tension of the staybolts which hold the pump together. The outlet side of the base has a combined drain plug and bypass valve. The pump is secured to the foundation by four bolts through the base plate. The flanges and base are cast in one piece and prepared for connection by means of DIN, ANSI or JIS. Motor The motor is a totally enclosed, fan-cooled motor with principal dimensions to IEC and DIN standards. The motor is flange-mounted with free-hole flange (FF).

Position	Qty.	Description
		Motor-mounting designation in accordance with IEC 60034-7: IM B 5 (Code I) / IM 3001 (Code II). Electrical tolerances comply with IEC 60034. The motor efficiency is classified as IE3 in accordance with IEC 60034-30-1. The motor requires no external motor protection. The motor control unit incorporates protection against slow- and quick-rising temperatures, e.g. constant overload and stalled conditions. Technical data Controls: Frequency converter: Built-in Pressure sensor: Y Liquid: Pumped liquid: Water Liquid temperature range: -20 .. 120 °C Liquid temperature during operation: 20 °C Density: 998.2 kg/m³ Technical: Rated flow: 20.5 m³/h Rated head: 197.9 m Pump orientation: Vertical Shaft seal arrangement: Single Code for shaft seal: HQQE Approvals on nameplate: CE, EAC, ACS Curve tolerance: ISO9906:2012 3B Materials: Base: Stainless steel EN 1.4408 AISI 316 Impeller: Stainless steel EN 1.4301 AISI 304 Bearing: SIC Installation: Maximum ambient temperature: 40 °C Maximum operating pressure: 25 bar Max pressure at stated temp: 25 bar / 120 °C 25 bar / -20 °C Type of connection: DIN / ANSI / JIS Size of inlet connection: DN 50 2 inch Size of outlet connection: DN 50 2 inch Pressure rating for pipe connection: PN 25 Flange rating inlet: 300 lb Flange size for motor: FF300 Electrical data: Motor standard: IEC Motor type: 160LB IE Efficiency class: IE3 Rated power - P2: 18.5 kW Power (P2) required by pump: 18.5 kW Mains frequency: 50 Hz Rated voltage: 3 x 380-480 V Rated current: 37.0-31.0 A Cos phi - power factor: 0.91-0.88 Rated speed: 480-3540 rpm Efficiency: IE3 92,4% Motor efficiency at full load: 92.4 % Number of poles: 2 Enclosure class (IEC 34-5): IP55 Insulation class (IEC 85): F


Position	Qty.	Description
		Others: Minimum efficiency index, MEI ≥: 0.70 Net weight: 223 kg Gross weight: 274 kg Shipping volume: 0.82 m ³

On request CRIE 15-12 N-FGJ-A-E-HQQE 50 Hz

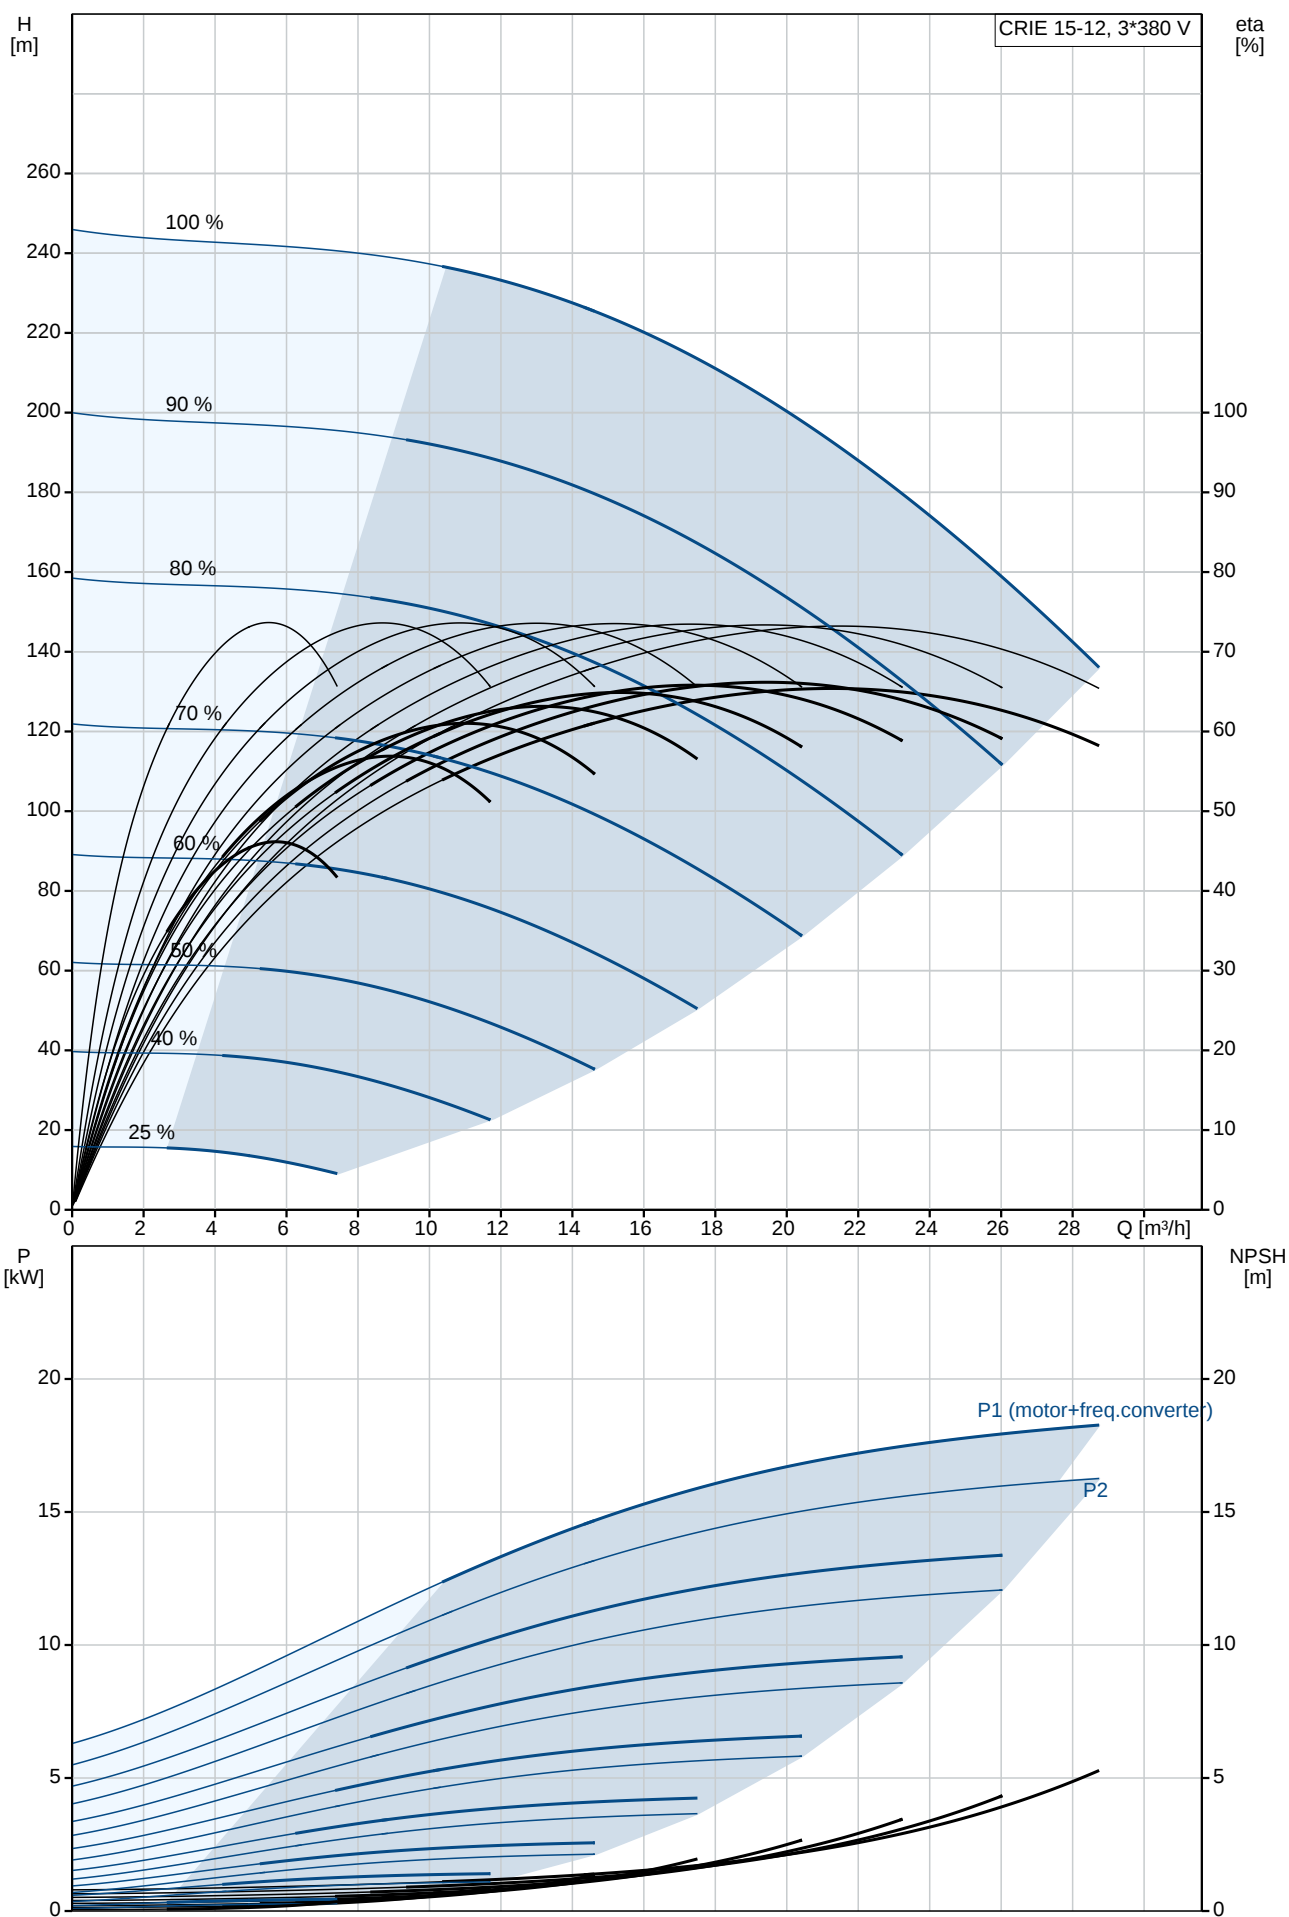


Description	Value
Insulation class (IEC 85):	F
Motor protec:	YES
Motor No:	85901026
Controls:	
Function Module:	ADVANCED I/O
Frequency converter:	Built-in
Pressure sensor:	Y
Others:	
Minimum efficiency index, MEI ≥:	0.70
Net weight:	223 kg
Gross weight:	274 kg
Shipping volume:	0.82 m³
Sales region:	Apreg

On request CRIE 15-12 N-FGJ-A-E-HQQE 50 Hz

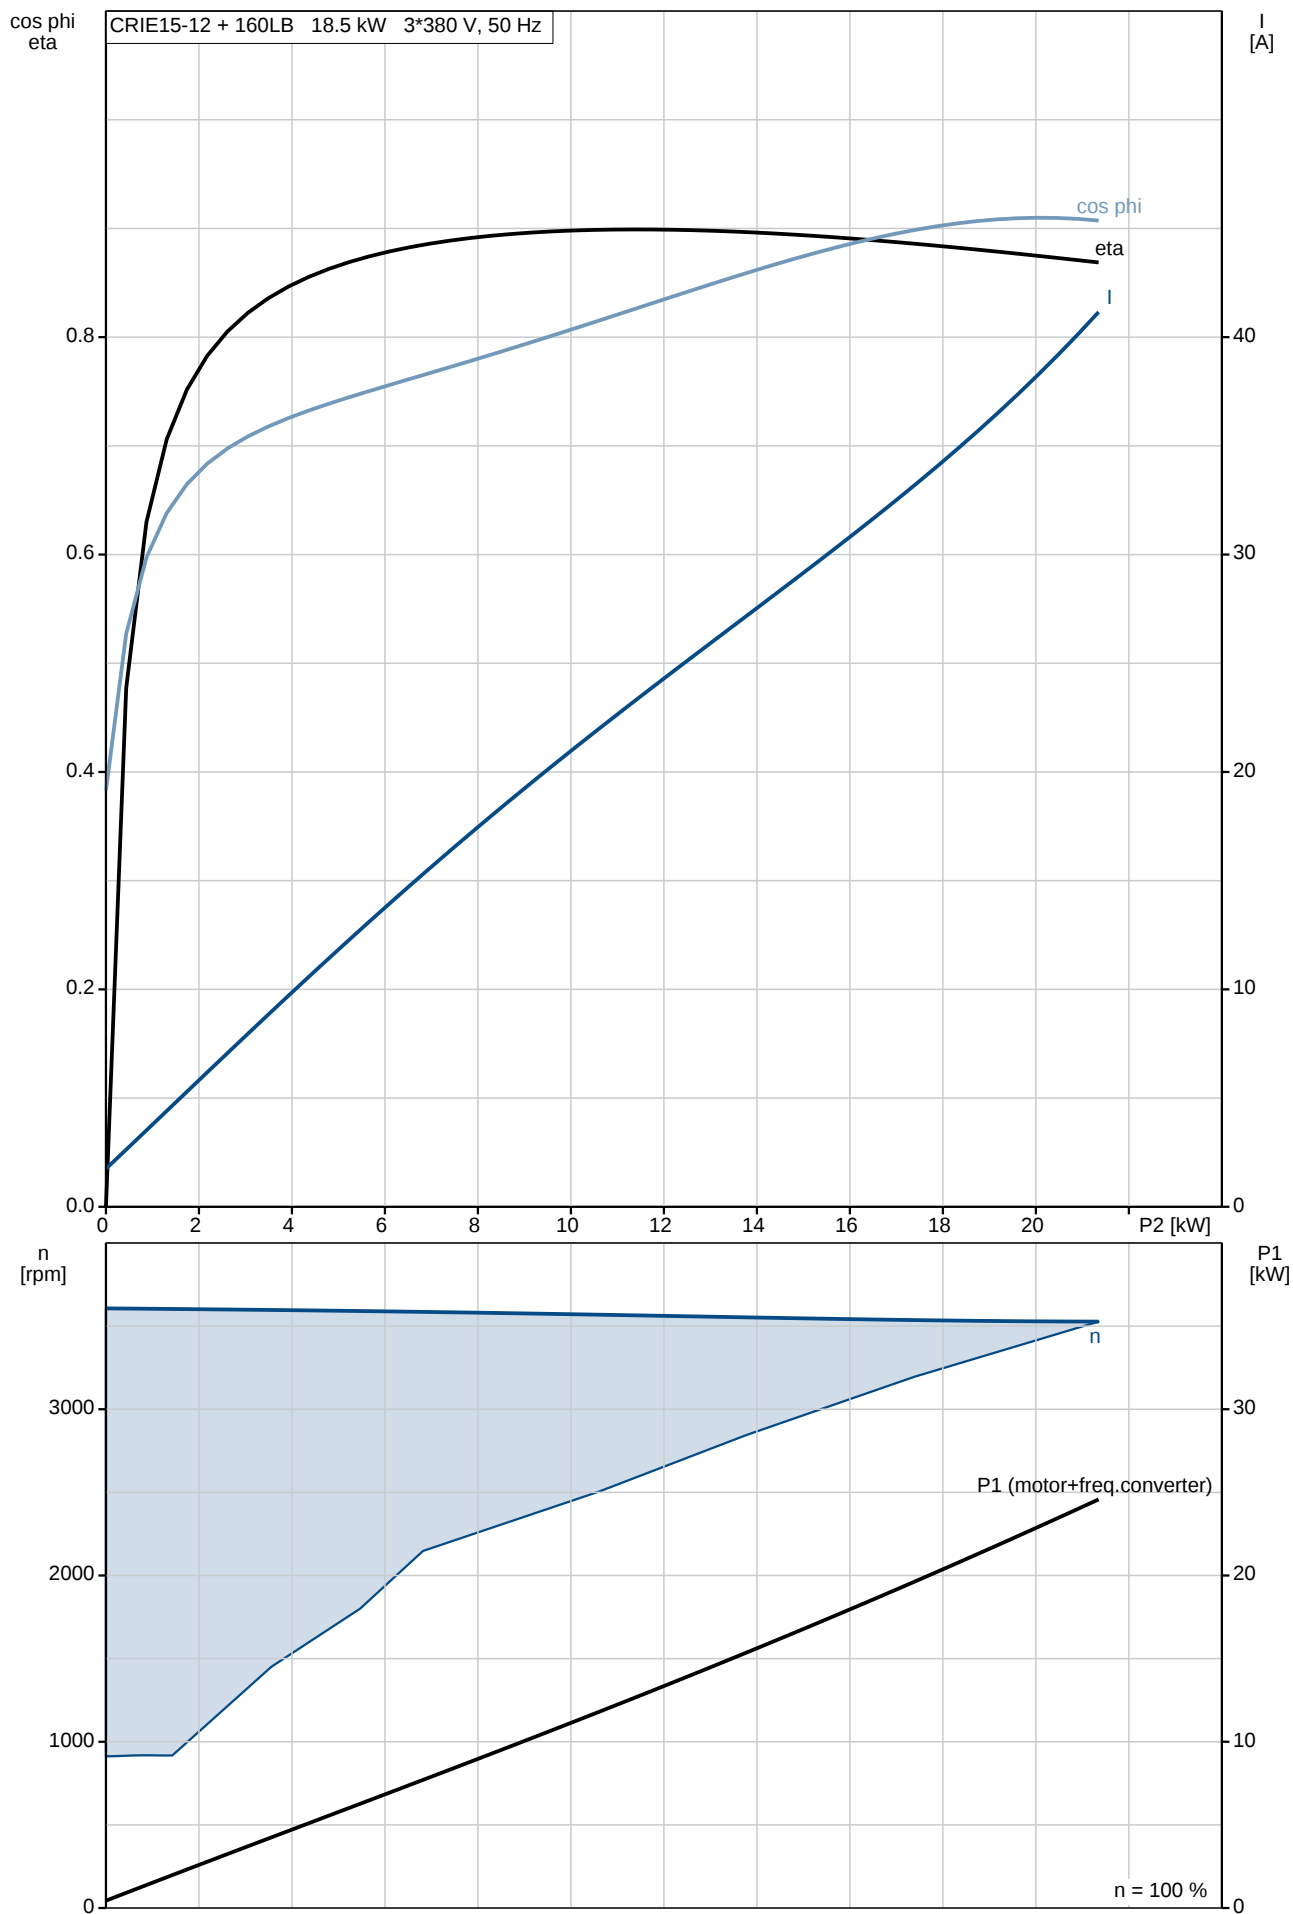

On request CRIE 15-12 N-FGJ-A-E-HQQE 50 Hz

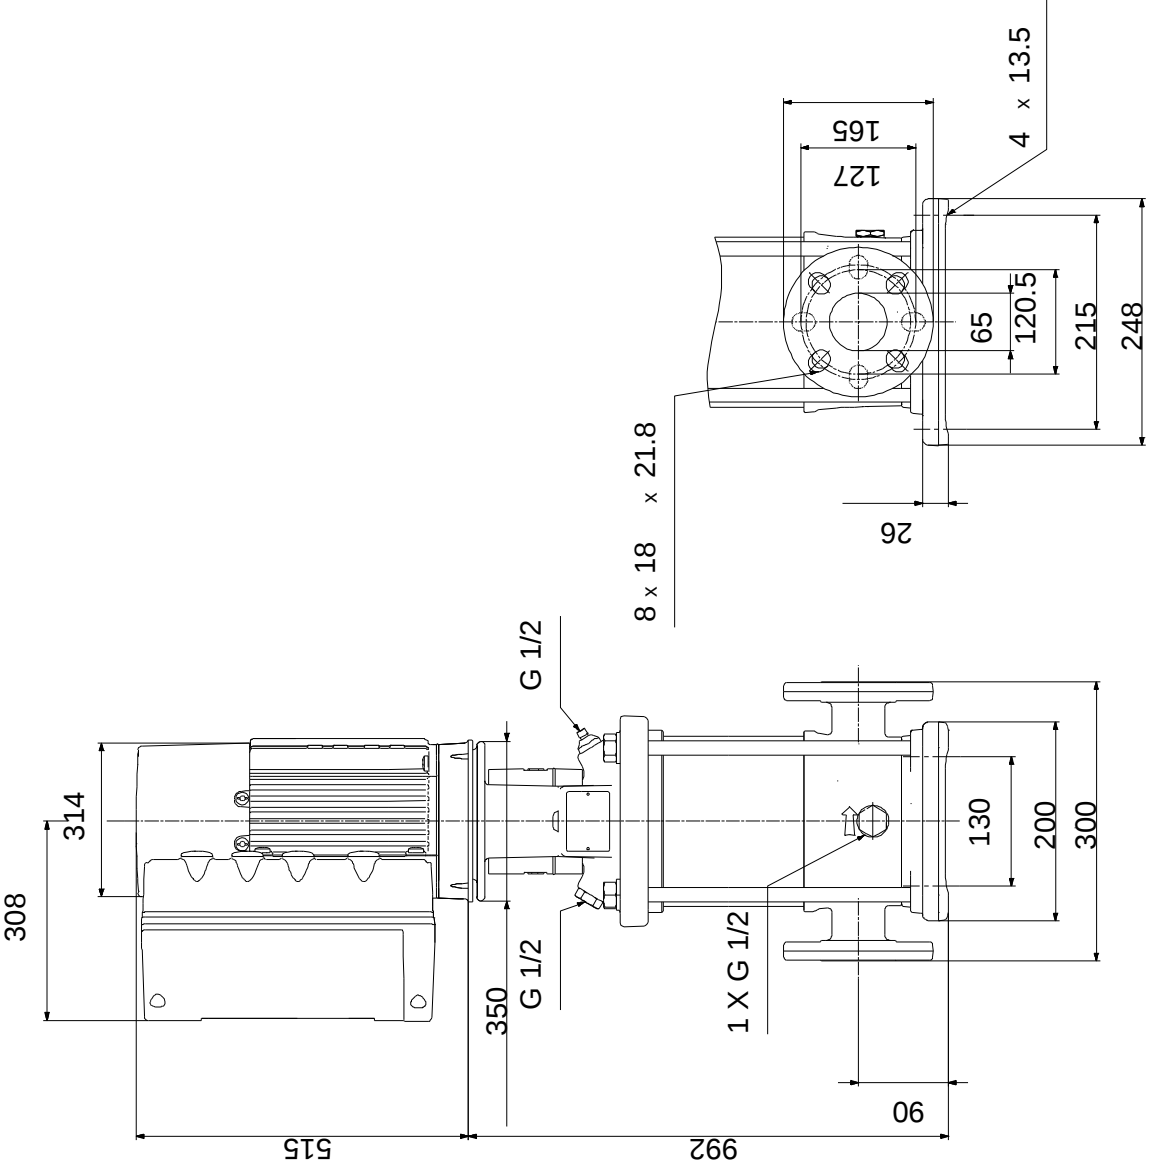

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Exploded view



Sectional drawing (TM058200 for TPE2,TPE3)



TM058200

Exploded view (TM057026 for MGE model H/I)



Parts list CRIE 15-12, Product No. On request
Valid from 21.8.2008 (0834)

Pos	Description	Annotation	Données de classification	Référence	Quantité	Unité
+	Motor				1	pcs
-	Base cpl.				1	pcs
6	Base				1	
25	Drain plug				1	
56	Base plate				1	
201	Flange				2	
203	Lock ring				2	
	Pressure transmitter				1	pcs
-	Base plate cpl.				1	pcs
36	Nut		Thread: M12		4	
57	Base plate				1	
58	Stud bolt				4	
59a	Flat Washer				4	
-	Rubber module				1	pcs
20	Spring				4	
37	O-ring				2	
38	O-ring		Diameter: 16,3 Material type: EPDM Thickness: 2,4		1	
38a	O-ring		Diameter: 5,3 Material type: EPDM Thickness: 2,4		1	
100	O-ring		Diameter: 16,3 Material type: EPDM Thickness: 2,4		2	
- 2	Pump head				1	pcs
1	Flange				1	
2	Pump head				1	
7	Coupling guard				2	
7.a	Combi Slot Torx screw				4	
- 18	Air vent screw				1	
	Plug				1	
	Spindle				1	
28	Hex head screw		Length (mm): 45 Thread: M16		4	
28a	Hex head screw		Length (mm): 25 Thread: M12		4	
36	Hex nut		Thread: M16		4	
37.a	O-ring				1	
76	Nameplate				1	
76a	Rivet				2	
77	Pump cover				1	
- 8	Coupling				1	pcs
9	Hex socket head cap screw		Designation: DIN 912 Length (mm): 25 Thread: M10		4	
10	Shaft pin		Diameter: 5 Length (mm): 26		1	
10a	Coupling half				2	
26	Staybolt				4	pcs
36	Hex nut		Thread: M16		4	pcs
55	Outer sleeve				1	pcs
66a	Washer		Designation: DIN 125 A Internal diameter: 17 Outer diameter: 30 Thickness: 3		4	pcs
- 80	Chamber stack				1	pcs
- 4	Intermediate chamber cpl.				8	
45	Neck ring cpl.				1	

Pos	Description	Annotation	Données de classification	Référence	Quantité	Unité
65	Retainer for upper seal ring				1	
- 4	Intermediate chamber cpl.				1	
	Guide vane				10	
	Front plate				1	
3	Top intermediate chamber				1	
- 4a	Intermediate chamber cpl.				3	
	Bearing plate				1	
	Bearing bush				1	
3a	Intermediate chamber				1	
45	Neck ring cpl.				1	
65	Retainer for upper seal ring				1	
26.b	Hex head screw				2	
26.c	Washer		Designation: DIN 125A		2	
			Thickness: 1,6			
26a	Strap cpl.				2	
36	Lock nut		Thread: M8		1	
- 44a	Inlet part cpl.				1	
45	Neck ring cpl.				1	
65	Retainer for upper seal ring				1	
44b	Inlet part				1	
47a	Bearing ring				3	
+ 49	Impeller cpl.				12	
- 51	Shaft, spline, cpl.				1	
	Bar				1	
62	Stop ring				1	
64b	Spacing bush		Length (mm): 5.00		1	
64b	Spacing bush				3	
64c	Spacing pipe		Length (mm): 12.7		1	
66	Wedge lock washer				1	
69	Spacing pipe		Length (mm): 43.6		8	
69	Spacing pipe		Internal diameter: 17,5		3	
			Length (mm): 17			
69	Spacing bush				1	
105	Shaft seal		Material type: HQQE		1	pcs

Disclaimer: The information about the Grundfos pump in this document may be outdated.

Data may be subject to alterations without further notice.

Please contact us to verify the data above is still accurate/up-to-date.

All information is copyright Grundfos.



info@lenntech.com

<https://www.lenntech.com>

tel. +31 152 610 900

fax. +31 152 616 289